

Codabench Wiki

Codabench Wiki PDF

Codabench Team

Apache-2.0

Table of contents

1. Home	7
1.1 Documentation	7
1.2 Useful links	7
2. Participants	8
2.1 Participating in a Competition	8
3. Organizers	10
3.1 Benchmark Creation	10
3.1.1 Getting Started Tutorial	10
3.1.2 Advanced Tutorial	11
3.1.3 How to Transition from Codalab to Codabench?	29
3.1.4 Competition Creation	31
3.1.5 Competition Creation Form	32
3.1.6 Competition Creation Bundle	39
3.1.7 Competition YAML Structure	40
3.1.8 YAML Structure	43
3.1.9 Competition Docker Image	48
3.1.10 Dataset Competition Creation and participate instruction	49
3.1.11 Leaderboard Features	52
3.1.12 Example Cancer Benchmarks	54
3.1.13 Public Tasks and Tasks Sharing	63
3.1.14 Detailed Results and Visualization	67
3.2 Running a Benchmarks	69
3.2.1 Benchmark Management & List Page	69
3.2.2 Competition Detail Tab Navigation	73
3.2.3 Ressource Management Submissions, Datasets/Programs, Tasks and Competition Bundles	76
3.2.4 Update programs or data	84
3.2.5 Queue Management	87
3.2.6 Compute Worker Management & Setup	90
3.2.7 Compute Worker Management with Podman	95
3.2.8 Server Status	97
4. Developers and Administrators	99
4.1 Codabench Basic Installtion Guide	99
4.1.1 Pre-requisites	99
4.1.2 Clone Repository	99
4.1.3 Edit the settings (.env)	99

4.1.4 Start the service	99
4.1.5 Run the following commands	99
4.1.6 Advanced Configuration	100
4.1.7 Troubleshooting	101
4.2 How to Deploy a Server	102
4.2.1 Overview	102
4.2.2 Pull codabench develop branch code locally	102
4.2.3 Installing docker and common docker commands	102
4.2.4 Modify .env file configuration	102
4.2.5 Open Access Permissions for following port number	103
4.2.6 Modify django-related configuration	103
4.2.7 Start service	104
4.2.8 Set public bucket policy to read/write	105
4.2.9 Checkout the log of the specified container	105
4.2.10 Stop service	105
4.2.11 Disabling docker containers on production	105
4.2.12 Link compute workers to default queue	106
4.2.13 Personalize Main Banner	106
4.2.14 Frequently asked questions (FAQs)	107
4.2.15 Securing Codabench and Minio	110
4.2.16 Workaround: MinIO and Django on the same machine with only the port 443 opened to the external network.	112
4.3 Administrative Procedures	113
4.3.1 Maintenance Mode	113
4.3.2 Give superuser privileges to a user	113
4.3.3 Migration	113
4.3.4 Collect static files	113
4.3.5 Delete POSTGRESDB and MINIO :	113
4.3.6 Feature competitions in home page	114
4.3.7 Shell Based Admin Features	114
4.3.8 Django Admin interface	114
4.3.9 RabbitMQ Management	116
4.3.10 Flower Management	116
4.3.11 Storage analytics	116
4.3.12 Homepage counters	117
4.3.13 User Quota management	117
4.3.14 Codabench Statistics	118
4.4 Codabench Docker Architecture	119
4.4.1 Django	119

4.4.2 Caddy	120
4.4.3 Postgres (Labeled DB in docker-compose)	120
4.4.4 Compute Worker	120
4.4.5 Site Worker	120
4.4.6 Minio	120
4.4.7 Create Buckets	120
4.4.8 Builder	120
4.4.9 Rabbit	121
4.4.10 Flower	121
4.4.11 Competition docker image	121
4.5 Submission Docker Container Layout	122
4.5.1 Site Worker	122
4.5.2 Compute Worker	122
4.5.3 Submission Container	122
4.6 Backups - Automating Creation and Restoring	123
4.6.1 Creating Backups	123
4.6.2 Scheduling Automatic Backups	123
4.6.3 Restoring From Backup	123
4.7 Submission Process Overview	125
4.7.1 Overview:	126
4.8 Robot Submissions	127
4.8.1 Pre-requisite	127
4.8.2 Getting started	128
4.8.3 Using the Scripts:	136
4.9 Running Tests	142
4.9.1 CircleCI	142
4.9.2 Example competitions	142
4.10 Automation	143
4.10.1 What and Why	143
4.10.2 Virtualenv	143
4.10.3 Requirements	143
4.10.4 Automate competition creation	143
4.11 Manual Validation	145
4.12 Validation and deployment of pull requests	146
4.12.1 1. Local testing and validation of the changes	146
4.12.2 Update the test server	147
4.12.3 Merge develop into master	148
4.12.4 Update the production server	149

4.12.5 Creating a Release	149
4.12.6 TODO	150
4.13 Upgrading Codabench	151
4.13.1 Index	151
4.13.2 Upgrade RabbitMQ (version < 1.0.0)	152
4.13.3 Create new logos for each competitions (version < 1.4.1)	153
4.13.4 Worker docker image manual update (version < 1.3.1)	154
4.13.5 Add line in .env file for default worker queue duration (version < 1.7.0)	155
4.13.6 Uncomment a line in your .env file (version < 1.8.0)	156
4.13.7 Rebuilding all docker images (version < 1.9.2)	157
4.13.8 Move the latest storage_inconsistency files from the logs folder to var/logs (version < 1.12.0)	158
4.13.9 Submissions and Participants count (version < 1.14.0)	159
4.13.10 Homepage Counters (version < 1.15.0)	160
4.13.11 User Removal (version < 1.17.0)	161
4.13.12 Database size fix (version < 1.18.0)	162
5. Newsletters Archive	164
5.1 2024	164
5.1.1 CodaLab in 2024	164
5.1.2 Unprecedented engagement	164
5.1.3 Introducing Codabench	165
5.1.4 Spotlight on competitions	165
5.1.5 What about the future?	166
5.1.6 Community	166
5.1.7 Last words	166
6. How you can contribute	168
6.1 Index	168
6.2 Contributing	169
6.2.1 Being a Codabench user	169
6.2.2 Setting up a local instance of Codabench	169
6.2.3 Setting up an autonomous Compute Worker on a machine	169
7. FAQ	170
7.1 General questions	170
7.1.1 What is Codabench for?	170
7.1.2 Can CodaLab competitions be privately hosted?	170
7.1.3 How to change my username?	170
7.1.4 How to make a task public or use public tasks from other users?	170
7.1.5 How to delete my account?	170

7.2 Technical questions	170
7.2.1 Server Setup Issues	170
7.2.2 A library is missing in the docker environment. What do to?	171
7.2.3 Emails are not showing up in my inbox for registration	171
7.2.4 Robots and automated submissions?	171
8. Contact Us	172

1. Home

1.1 Documentation

Welcome to the Codabench wiki!

Codabench is a platform allowing you to flexibly specify a benchmark. First you define tasks, e.g. datasets and metrics of success, then you specify the API for submissions of code (algorithms), add some documentation pages, and "CLICK!" your benchmark is created, ready to accept submissions of new algorithms. Participant results get appended to an ever-growing leaderboard.

You may also create inverted benchmarks in which the role of datasets and algorithms are swapped. You specify reference algorithms and your participants submit datasets.

1.2 Useful links

[Governance Document](#)

[Privacy and Terms of Use](#)

[About](#)

2. Participants

2.1 Participating in a Competition

Signing up and updating your settings

When you sign up, you will have to provide your name and a valid email.

Registering for a Benchmark

To make an entry in a benchmark click on the "My Submissions" tab, you will then be prompted to accept the rules to register to that benchmark. When registering, a request may be sent to the benchmark organizer. You will be notified when the benchmark organizer has approved your registration request. Follow the instructions of the organizers.

You have not yet registered for this competition.

To participate in this competition, you must accept its specific [terms and conditions](#). This competition **does not** require approval, once you register, you will immediately be able to participate.

I accept the terms and conditions of the competition.

Register

Making a Submission

Making a submission to a benchmark involves uploading a bundle (.zip archive) containing files with your answer, in the format that has been specified by the benchmark organizer. There are two types of submissions: - **Code** submissions contain a metadata file specifying the command to execute - **Results** submission contain the solution to the problem (no code executed on the platform)

To make a submission

1. [Sign in to Codabench](#). If you do not have an account, you will need to create one.
2. Select the benchmark you want to work with.
3. Click the **My Submissions** tab. Here, you can access the data that has been provided by the benchmark organizer.
4. Click on the **paper clip logo** and select your zip file.

Get Started

Phases

My Submissions

Results

Forum

Development

Final

Submission upload

Submit as:

Yourself

On this page, you can make new submissions, and see previous submissions for each phase in the competition.

You can also view all your submissions in the [Resources Interface](#).

Viewing Benchmark Results

You can keep up with the progress of benchmarks you are participating in by clicking on the **Results** tab. This will display the leaderboard.

Results			
Task:		Development Task	
#	Participant	Validation Accuracy	Test Accuracy
1	██████████	0.8902821317	n/a
2	██████████	0.8871473354	n/a
3	██████████	0.8840125392	n/a
4	██████████	0.8840125392	n/a
5	██████████	0.8808777429	n/a
6	██████████	0.8448275862	n/a

3. Organizers

3.1 Benchmark Creation

3.1.1 Getting Started Tutorial

Codabench is an upgraded version of the [CodaLab Competitions](#) platform, allowing you to create either **competitions** or **benchmarks**. A benchmark is essentially an **ever-lasting competition** with **multiple tasks**, for which a participant can make **multiple entries** in the result table.

This getting started tutorial shows a **simple example** of how to create a competition. Advanced users should check [fancier examples](#) and [the full documentation](#). If you simply wish to participate in a benchmark or competition, go to [Participating in a benchmark](#).

Getting ready

- Create a [Codabench](#) account (if not done yet)
- Download the [sample competition bundle](#) and the [sample submission](#).
- Do not unzip them.

Create a competition

- From the front page of [Codabench](#), in the top menu, go to the **Benchmark > Management**
- Click the green **Upload** button at the top right.
- Upload the (zipped) sample competition bundle => this will create your competition.

Make changes

- Click on the **Edit** gray button at the top to enter the editor.
- Make small changes
 - Change the logo in the **Details** tab to another png or jpg file.
 - Change the end date in the **Phases** tab: if the competition is terminated, you will not be able to make submissions.
- Save your changes and verify that they have become effective.

Make a submission

- In your competition page, go to the tab **My submissions**
- Submit the (zipped) sample submission bundle you downloaded.
- When your submission finishes, go to the **Result tab** to check if it shows up on the leaderboard.

 **In some competitions, submissions successfully processed do not automatically get pushed to the leaderboard**

Publish your competition

- If you want to make your competition visible to all, you must publish it by checking the **Publish** box at the very bottom of the editor **Details** page.
- After you publish your competition, it should now be visible when you are not logged in, at the URL of your competition page.


You are done with this simple tutorial. Next, check the more [advanced tutorial](#).

You can also check out this blog post: [How to create your first benchmark on Codabench](#).

3.1.2 Advanced Tutorial

Here is an advanced tutorial. If you are new to CodaBench, please refer to [get started tutorial](#) first. In this article, you'll learn how to use more advanced features and how to create benchmarks using either the editor or bundles. Before proceeding to our tutorial, make sure you have registered for an account on the [Codabench](#) website.


The image below is an overview of the benchmark creation process

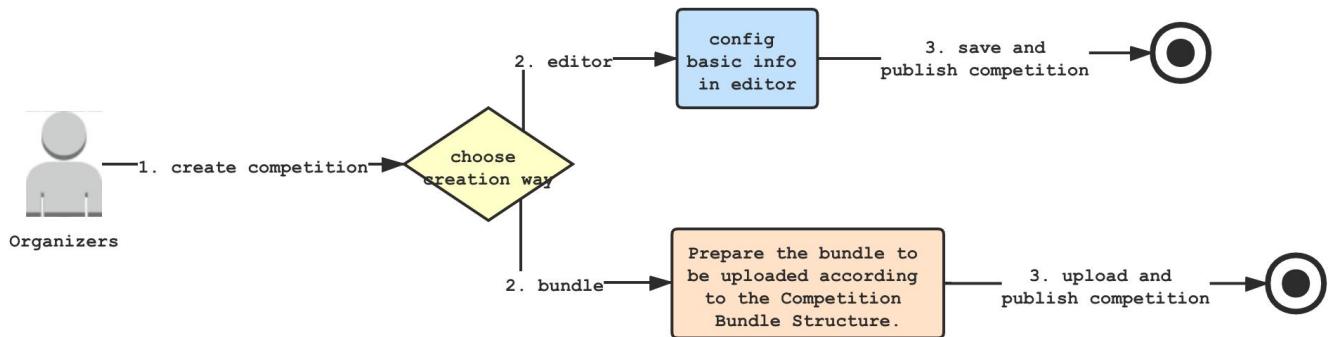

Creating a Benchmark by Editor

In this chapter, I'll take you step by step through the Editor's approach to creating benchmark, including algorithm type and dataset type.

STEP 1: CLICK ON MANAGEMENT IN THE TOP RIGHT CORNER OF CODABENCH'S HOME PAGE UNDER COMPETITIONS.

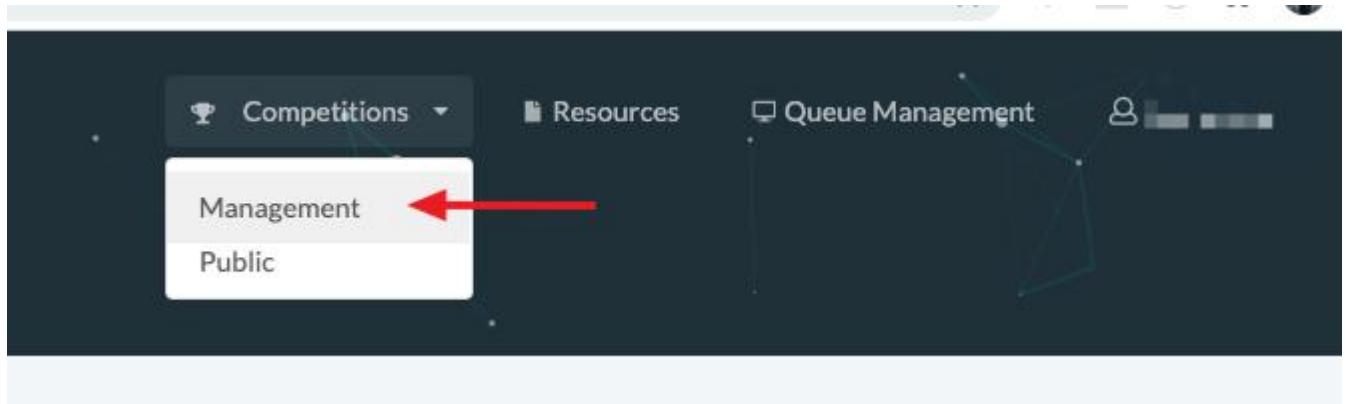

When you click on it, you will see the screen as shown in the screenshot below.

A screenshot of the 'Competition Management' page. The title 'Competition Management' is at the top, along with 'Create' and 'Upload' buttons. Below is a table with columns: Name, Type, Uploaded..., Publish, Edit, and Delete. The table lists several competitions, each with a set of icons for file operations.

Name	Type	Uploaded...	Publish	Edit	Delete
Classify Wheat Seeds - Single phase with multiple task	competition	5 months ago			
Classify Wheat Seeds - Multiple phase with multiple task	competition	5 months ago			
Classify Wheat Seeds	competition	5 months ago			
Health Data Challenge	competition	5 months ago			
Health Data Challenge	competition	5 months ago			
AutoWSL Challenge :: Feedback Phase Without Editing Scoring Directory	competition	5 months ago			
AutoWSL Challenge :: Feedback Phase	competition	5 months ago			
AutoWSL Challenge Single Phase Single Task	competition	5 months ago			
AutoWSL Challenge Single Phase with Multiple Task	competition	4 months ago			
AutoWSL Challenge Multiple Phases with Multiple Tasks	competition	4 months ago			

STEP 2: CLICK ON THE CREATE BUTTON IN THE TOP RIGHT CORNER OF COMPETITION MANAGEMENT.

A screenshot of the 'Competition Management' page. The title 'Competition Management' is at the top, along with 'Create' and 'Upload' buttons. Below is a table with columns: Name, Type, Uploaded..., Publish, Edit, and Delete. The table lists one competition. A red arrow points to the 'Create' button, which is highlighted with a red box.

Name	Type	Uploaded...	Publish	Edit	Delete
Classify Wheat Seeds - Single phase with multiple task	competition	5 months ago			

STEP 3: FILL IN THE DETAILS TAB CONTENT.

Details

Title * Classify Wheat Seeds Give a name to the competition you create.

Logo * wheat.jpg Upload a photo as a promotional photo for the competition

Description Classify Wheat Seeds Write a brief description of the competition you are creating (optional)!

Fact Sheet

Boolean + Text + Selection +

Queue You can specify a private Queue for your contest, which is used to run tasks. Without the settings, the default is the Queue provided by Codabench.

Competition Docker Image * codalab/codalab-legacy:py3 The Docker image is used to specify the image of the current competition, which contains the environment needed to run a match. For example, python3, tensorflow and so on.

Competition Type Competition

Competition Type has two optional values: Competition and Benchmark. In short, Competition has a limit on the number of times a player can submit, which makes it suitable for competitions, while Benchmark has no limit on the number of times a player can submit, which makes it suitable for research tests.

Publish ?

STEP 4: FILL IN THE PARTICIPANT TAB.

Participation

Terms * Write competition/benchmark related rules here.

Terms and Conditions

We only have two rules

Rule number one
Don't be a dick

Rule number two
See rule number one

A check mark indicates that the contestant will be automatically approved and added to the competition/benchmark when he or she agrees to the terms.

Auto approve registration requests A check mark indicates that the contestant will be automatically approved and added to the competition/benchmark when he or she agrees to the terms.

Allow robot submissions

Publish ?

STEP 5: FILL IN THE PAGES TAB.

Pages Tab is designed to allow you to further introduce the competition. For example, how to participate in the current competition (how to write a submission that meets the requirements).

How to participate

Publish Save Discard Changes Back To Competition ?

STEP 6: FILL IN THE PHASES TAB.

Click the Add Phase button to go to the Phase Edit Details page.

No phases added yet, at least 1 is required!

Publish Save Discard Changes Back To Competition ?

Edit phase

Name

Start End

Tasks (Order will be saved) Note: Adding a new task will cause all submissions to be run against it. [?](#) * Under Phase we can set up the Task to run, now our first task is to create a Task

Description
B I H | “ “ “ “ | % |

Right-click the Button to open it in a new browser tab.

lines: 1 words: 0 0:0

► Advanced [⚙️](#)

[Manage Tasks / Datasets](#) Cancel Save

When you click on the Manage Tasks/Datasets button, you will see the screenshot shown below

Click the Add Dataset button in the diagram to upload the resource files needed to create the competition.

Name	Type	Uploaded...	In Use	Public	Delete?
liuzhenwu - submission	submission	23 days ago			X <input type="checkbox"/>
liuzhenwu - submission	submission	24 days ago			X <input type="checkbox"/>
liuzhenwu - submission	submission	25 days ago			X <input type="checkbox"/>
liuzhenwu - submission	submission	25 days ago			X <input type="checkbox"/>
liuzhenwu - submission	submission	27 days ago			X <input type="checkbox"/>
iguyon - submission	submission	37 days ago	<input checked="" type="checkbox"/>		X <input type="checkbox"/>
liuzhenwu - submission	submission	37 days ago			X <input type="checkbox"/>
liuzhenwu - submission	submission	37 days ago			X <input type="checkbox"/>
liuzhenwu - submission	submission	37 days ago			X <input type="checkbox"/>
liuzhenwu - submission	submission	37 days ago			X <input type="checkbox"/>

Creating a phase will require a bundle of the following types (.zip format), I'll give you more details on how to write these bundle later.

Now you just need to have this concept in your mind

Form

Wheat_Input_Data

Wheat_Input_Data

Input Data

Ingestion Program ←

Input Data ←

Public Data ←

Reference Data ←


Scoring Program ←

Starting Kit

Submission

Here are the screenshots of the 5 types of bundles after they were uploaded

Name	Type	Uploaded...	In Use	Public	Delete?
Wheat_Scoring_Program	scoring_program	3 seconds ago		<input type="checkbox"/>	<input type="checkbox"/>
Wheat_Reference_Data	reference_data	42 seconds ago		<input type="checkbox"/>	<input type="checkbox"/>
Wheat_Ingestion_Program	ingestion_program	87 seconds ago		<input type="checkbox"/>	<input type="checkbox"/>
Wheat_Input_Data	input_data	2 minutes ago		<input type="checkbox"/>	<input type="checkbox"/>
Wheat_Public_Data	public_data	8 minutes ago		<input type="checkbox"/>	<input type="checkbox"/>

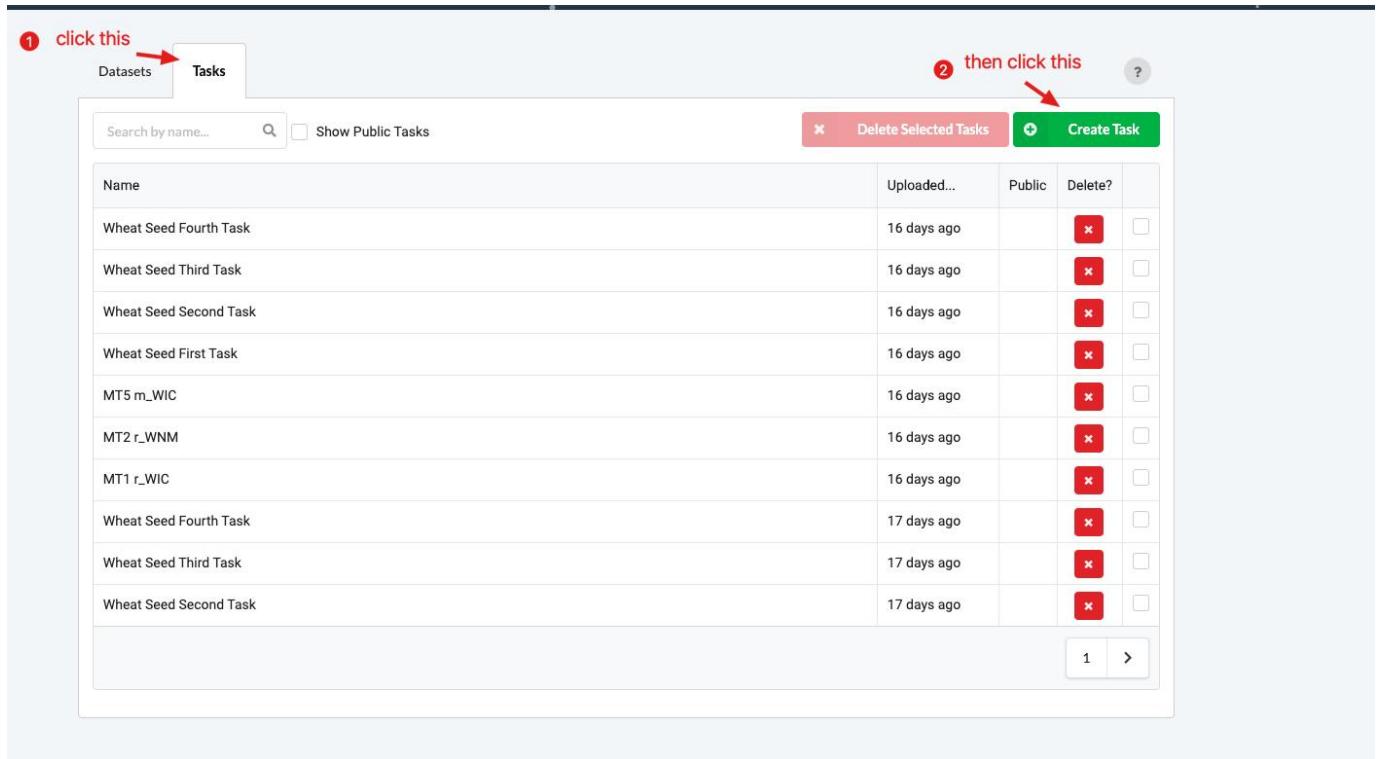

1 click this

2 then click this

Name	Uploaded...	Public	Delete?
Wheat Seed Fourth Task	16 days ago	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Wheat Seed Third Task	16 days ago	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Wheat Seed Second Task	16 days ago	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Wheat Seed First Task	16 days ago	<input checked="" type="checkbox"/>	<input type="checkbox"/>
MT5 m_WIC	16 days ago	<input checked="" type="checkbox"/>	<input type="checkbox"/>
MT2 r_WNM	16 days ago	<input checked="" type="checkbox"/>	<input type="checkbox"/>
MT1 r_WIC	16 days ago	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Wheat Seed Fourth Task	17 days ago	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Wheat Seed Third Task	17 days ago	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Wheat Seed Second Task	17 days ago	<input checked="" type="checkbox"/>	<input type="checkbox"/>

1 >

Create Task

Details Datasets

Name *

Wheat_First_Task_Demo

Description *

Wheat_First_Task_Demo

Create Cancel

Edit phase

Name *

Start * ← Set the phase enable time here.

November 28, 2020

End

January 21, 2021

Tasks (Order will be saved) Note: Adding a new task will cause all submissions to be run against it. *

Wheat_First_Task_Demo x ← Here you can search for the Task you just created by name.

Description

First Phase Demo Description here... ← write down description for phase here

Here you can set a timeout time for a submission by a user.
If the time limit is exceeded and the submission has not finished running, it will be considered a failure.
The default value is 600 seconds, which is ten minutes. The unit here is seconds.

Execution Time Limit ↴ ↗ ← Advanced ↴ ↗

Max Submissions Per Day ↴ ↗ 20

Max Submissions Per Person ↴ ↗ 100 ← same here

Hide Submission Output

Here you can set the maximum number of Submission per day for a user under the current Phase.

Manage Tasks / Datasets

Cancel

Save

STEP 7: FILL IN THE LEADERBOARD TAB.

Details Participation Pages Phases Leaderboard Administrators

Leaderboards

No leaderboards added yet, at least 1 is required!

+ Add leaderboard

click this

Publish Save Discard Changes Back To Competition ?

Leaderboard form


Leaderboard Settings **Set the name of the LeaderBoard.**

Title *	Results	Key <small>?</small> *	main
<input type="checkbox"/> Leaderboard is Hidden			
Submission Rule Add			
New Column		New Column	
Primary Column	<input checked="" type="radio"/>	<input type="radio"/>	
Computation	None	None	
Sorting <small>?</small>	Descending	Descending	
Column Key *	accuracy	duration	
Hidden	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
< >		< >	

The setting of the key is related to the result of the scoring program and will be described in detail later.

STEP 8: SAVE AND PUBLISH THE BENCHMARK

<input checked="" type="checkbox"/> Details	<input checked="" type="checkbox"/> Participation	<input checked="" type="checkbox"/> Pages	<input checked="" type="checkbox"/> Phases	<input checked="" type="checkbox"/> Leaderboard	Administrators <small>Creator</small>
Administrators <small>Add administrator</small>					
① click this <input checked="" type="checkbox"/> Publish Save Discard Changes Back To Competition ?					
② then click this 					

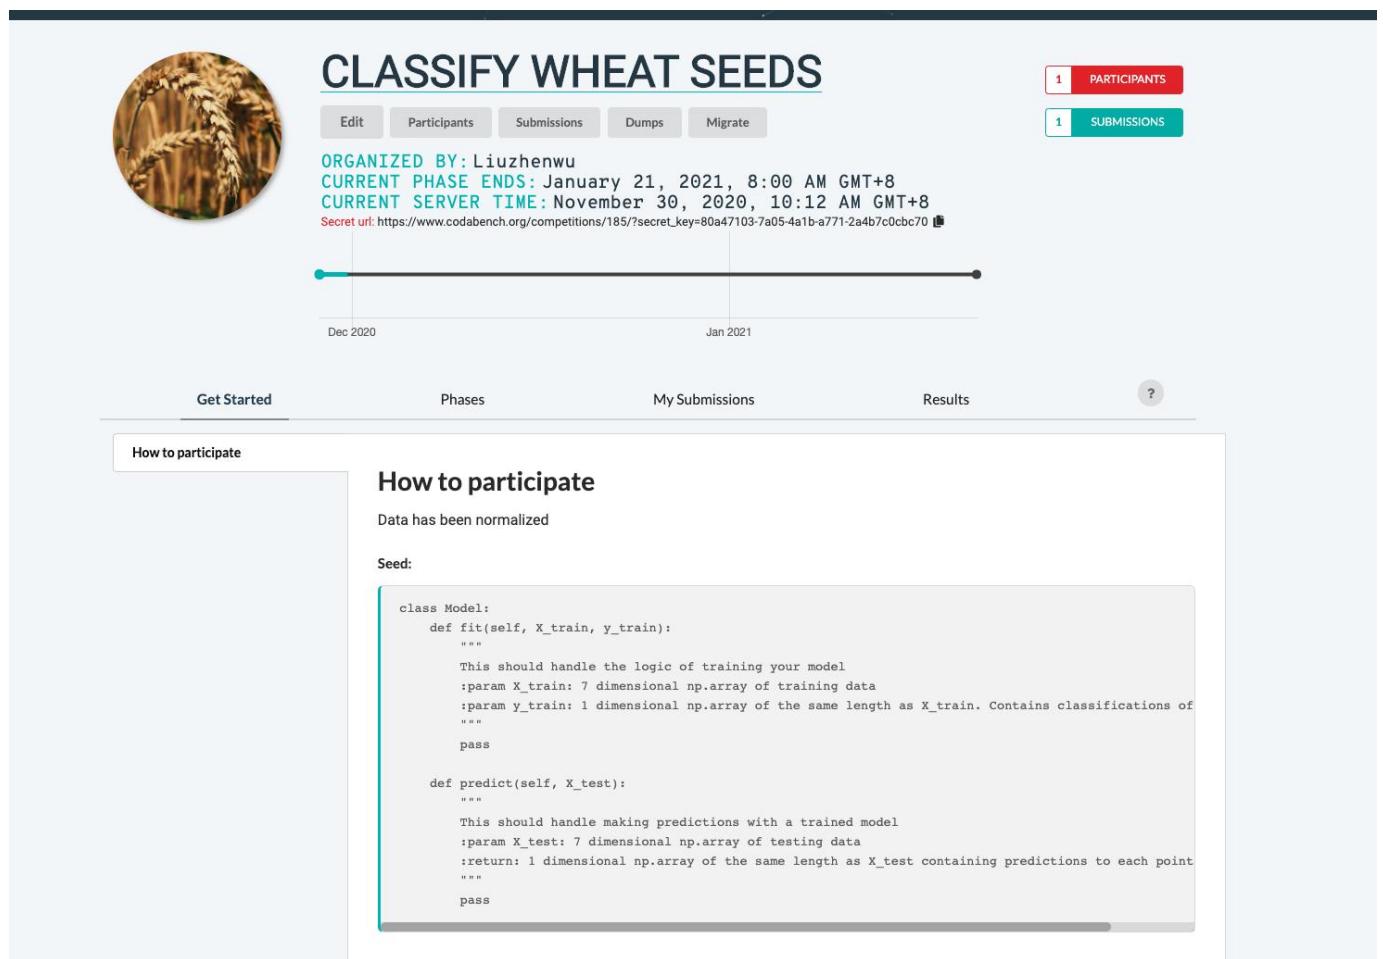

CLASSIFY WHEAT SEEDS

ORGANIZED BY: Liuzhenwu

CURRENT PHASE ENDS: January 21, 2021, 8:00 AM GMT+8

CURRENT SERVER TIME: November 30, 2020, 10:12 AM GMT+8

Secret url: https://www.codabench.org/competitions/185/?secret_key=80a47103-7a05-4a1b-a771-2a4b7c0cbc70

Dec 2020 Jan 2021

Get Started Phases My Submissions Results ?

How to participate

How to participate

Data has been normalized

Seed:

```
class Model:
    def fit(self, X_train, y_train):
        """
        This should handle the logic of training your model
        :param X_train: 7 dimensional np.array of training data
        :param y_train: 1 dimensional np.array of the same length as X_train. Contains classifications of
        """
        pass

    def predict(self, X_test):
        """
        This should handle making predictions with a trained model
        :param X_test: 7 dimensional np.array of testing data
        :return: 1 dimensional np.array of the same length as X_test containing predictions to each point
        """
        pass
```

Creating a Benchmark by Bundle

Creating a benchmark through bundles is a much more efficient way than using editors.

SIMPLE VERSION EXAMPLE: CLASSIFY WHEAT SEEDS

STEP 1: DOWNLOAD BUNDLE

https://github.com/codalab/competition-examples/blob/master/codabench/wheat_seeds/code_submission_bundle.zip

Click on the link above to download the bundle in the screenshot.

develop [competitions-v2 / src / tests / functional / test_files /](#) Go to file Add file

Logan-Ruf Chahub connection update (#571) bdf6803 5 days ago History

...

competition.zip	ChaRepo (#253)	10 months ago
competition_15.zip	detailed results fixes (#475)	4 months ago
competition_18.zip	fix ci error	3 months ago
competition_v2_multi_task.zip	Chahub connection update (#571)	5 days ago
competition_v2_multi_task_fact_sheet.zip	Chahub connection update (#571)	5 days ago
scoring_program.zip	Fix manual competition creation & selenium test it (#435)	5 months ago
submission.zip	ChaRepo (#253)	10 months ago
submission_15.zip	Bundle converter core (#255)	13 months ago
submission_18.zip	add functional test and test file for competition v1.8	4 months ago
test_logo.png	submit to specific tasks (#463)	5 months ago

STEP 2: GO TO THE BENCHMARK UPLOAD PAGE

Search Competitions Codabench Accelerating reproducible computational research.

Competitions Resources Queue Management Management Public

Competition Management Create Upload

Competitions I'm Running Competitions I'm In


Name	Type	Uploaded...	Publish	Edit	Delete
Classify Wheat Seeds - Single phase with multiple task	competition	5 months ago			

Competition upload


Click the Upload button to upload the bundle you just downloaded.

STEP 3: UPLOAD THE BUNDLE

After the bundle has been uploaded, you will see the screenshot shown below.

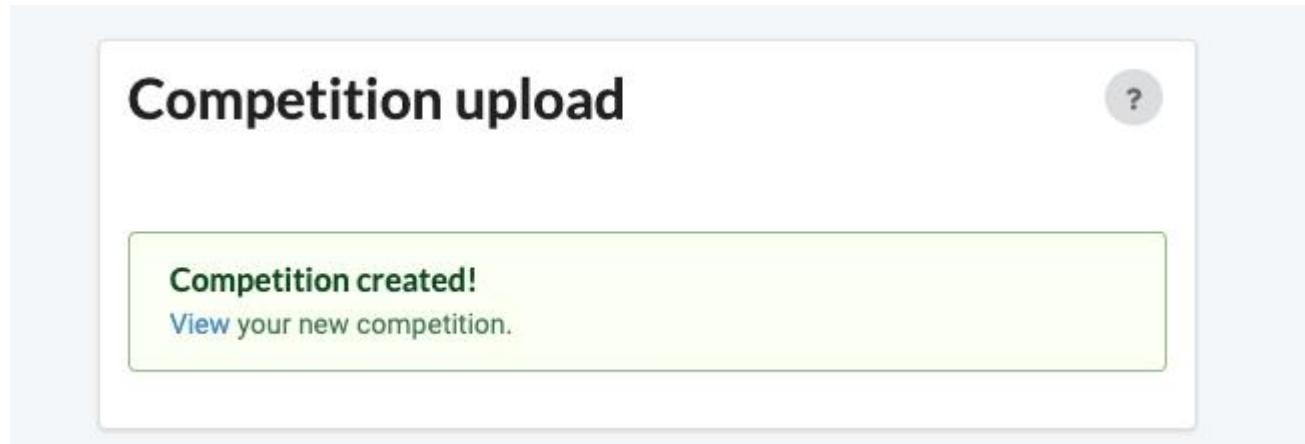

STEP 4: VIEW YOUR NEW BENCHMARK

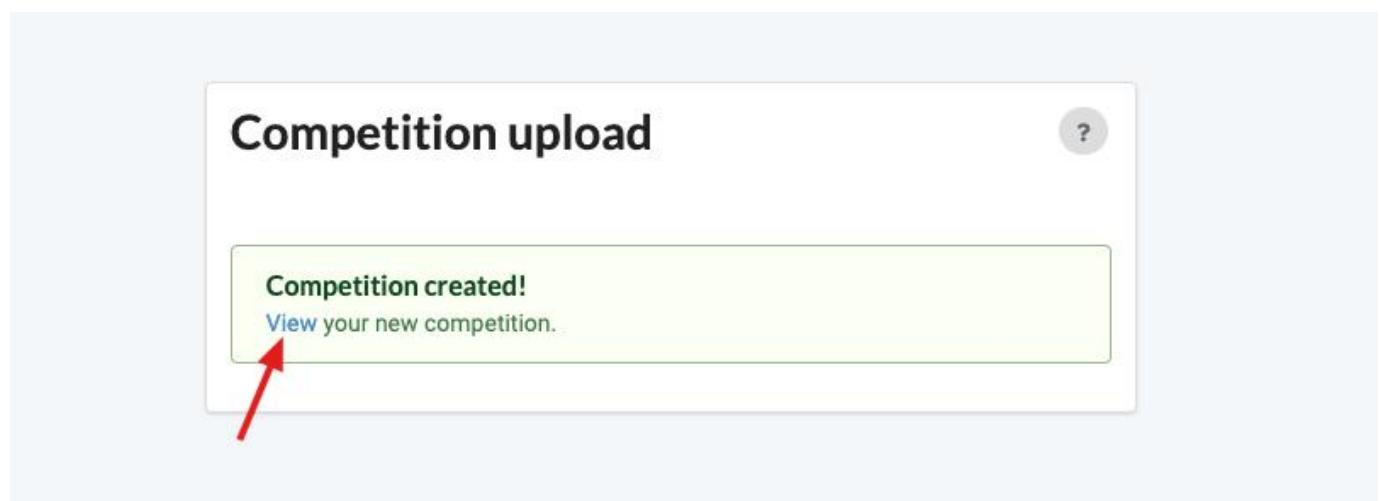



CLASSIFY WHEAT SEEDS

ORGANIZED BY: Liuzhenwu
CURRENT PHASE ENDS: Never
CURRENT SERVER TIME: November 30, 2020, 10:41 AM GMT+8
Secret url: https://www.codabench.org/competitions/187/?secret_key=f2df2481-bbcb-4539-b639-475cdec3d3d8

1 PARTICIPANTS
0 SUBMISSIONS

Sep 2019 Oct 2019 Nov 2019 Dec 2019

Get Started Phases My Submissions Results ?

Participation

How to participate

Data has been normalized

Seed:

```

class Model:
    def fit(self, X_train, y_train):
        """
        This should handle the logic of training your model
        :param X_train: 7 dimensional np.array of training data
        :param y_train: 1 dimensional np.array of the same length as X_train. Contains classifications of
        """
        pass

    def predict(self, X_test):
        """
        This should handle making predictions with a trained model
        :param X_test: 7 dimensional np.array of testing data
        :return: 1 dimensional np.array of the same length as X_test containing predictions to each point
        """
        pass

```

Benchmark Examples

Example bundles for code & dataset competition can be found here:

<https://github.com/codalab/competition-examples/tree/master/codabench>

IRIS

[Iris Codabench Bundle](#) is a simple benchmark involving two phases, code submission and results submission.

AUTOWSL

Two versions of the [Automated Weakly Supervised Learning Benchmark](#): - [Code submission benchmark](#) - [Dataset submission benchmark](#)

MINI-AUTOML

[Mini-AutoML Bundle](#) is a benchmark template for Codabench, featuring code submission to multiple datasets (tasks).

How do I set up submission comments for multiple submissions?

STEPS

Step 1: Click the edit button

AUTOWSL BENCHMARK SINGLE PHASE WITH MULTIPLE TASK

ORGANIZED BY: Liuzhenwu

CURRENT PHASE ENDS: December 30, 2020, 8:00 AM GMT+8

CURRENT SERVER TIME: December 4, 2020, 4:51 PM GMT+8

Secret url: https://www.codabench.org/competitions/195/?secret_key=ed0163b0-905c-4e3f-9eb6-c63ec3460a94

July 2020 Aug 2020 Sep 2020 Oct 2020 Nov 2020 Dec 2020

Get Started Phases My Submissions Results

credits

Step 2: Enable multiple submissions on leaderboard

Details Participation Pages Phases Leaderboard Administrators

Leaderboards

Results

Add leaderboard

Publish Save Discard Changes Back To Competition ?

Leaderboard form

Leaderboard Settings

Title Key


Leaderboard is Hidden

Submission Rule

Add And Delete Multiple

Add

Add And Delete

Add And Delete Multiple 

Force Last

Force Latest Multiple

Force Best

Column Key Duration


Hidden None

duration Descending




Step 3: Set up submission comment

1  **Details**  Participation  Pages  Phases  Leaderboard  Administrators

Title* 

Logo* 


Description 

Create a fully Automated Deep Learning solution for Text Categorization.

Fact Sheet 

Type: Text 

Key name: 

Show On Leaderboard: 

Display Name: 

Is Required: 

2 choose Text+ 

3 doing like this 

lines: 1 words: 10 0:0

Step 4: Save all changes

Publish    

Step 5: Leave a comment before making submission

Get Started Phases **My Submissions** Results ?

Single Phase with Multiple Task

Submission upload

Metadata or Fact Sheet ①

SUBMISSION_COMMENT: * *write down your comment here*

FIFTH_SUBMISSION


Selected Tasks

② click here to choose submission zip file


Search... Status

ID #	File name	Status	Actions
1663	AutoWSL_dataset_submission.zip	Finished	✓ 
1655	AutoWSL_dataset_submission.zip	Finished	✓ 
1643	AutoWSL_dataset_submission.zip	Finished	✓ 
1635	AutoWSL_dataset_submission.zip	Finished	✓ 
1631	AutoWSL_dataset_submission.zip	Finished	✓ 

③ you could choose whether to put this submission result to leaderboard or not after submission finished

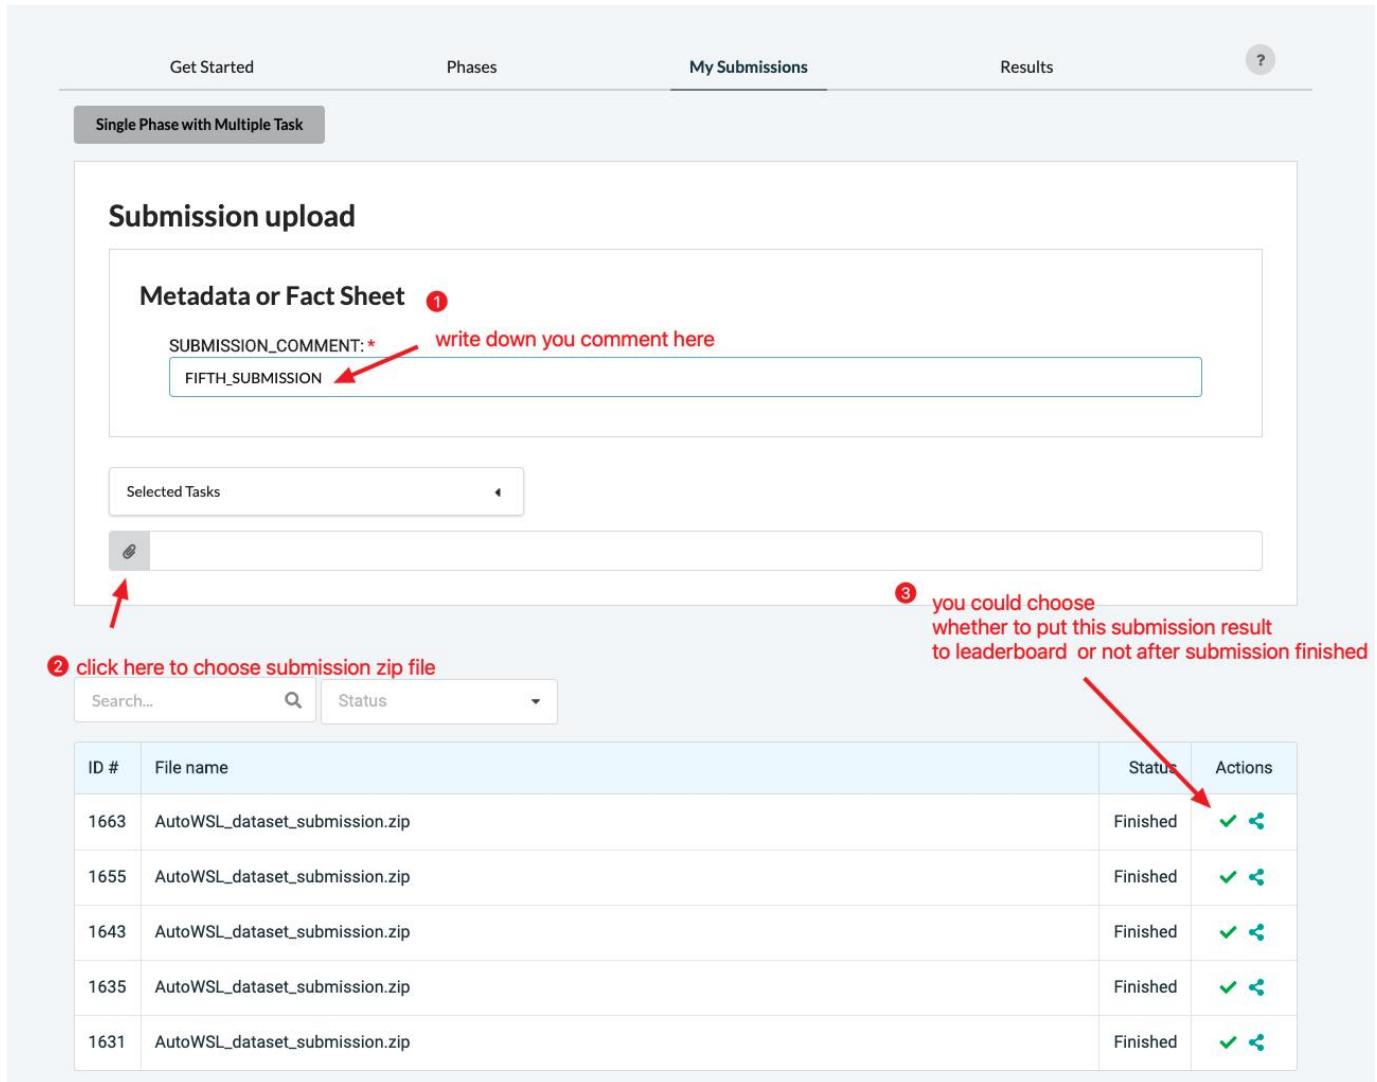

Step 6: Check out the leaderboard

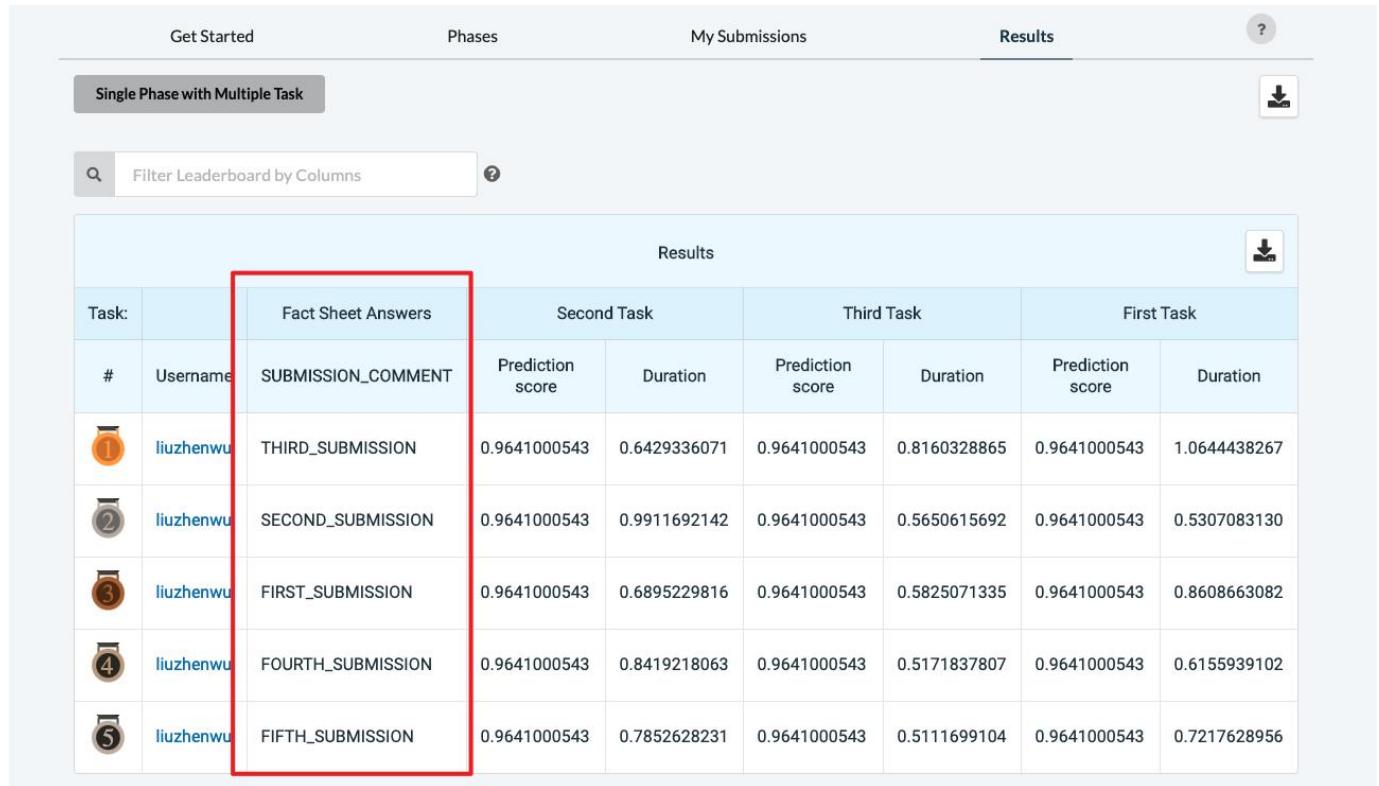

Get Started Phases My Submissions **Results** ?

Single Phase with Multiple Task

Filter Leaderboard by Columns

Results

Fact Sheet Answers

Task:	#	Username	SUBMISSION_COMMENT	Second Task		Third Task		First Task	
				Prediction score	Duration	Prediction score	Duration	Prediction score	Duration
1	1	liuzhenwu	THIRD_SUBMISSION	0.9641000543	0.6429336071	0.9641000543	0.8160328865	0.9641000543	1.0644438267
2	2	liuzhenwu	SECOND_SUBMISSION	0.9641000543	0.9911692142	0.9641000543	0.5650615692	0.9641000543	0.5307083130
3	3	liuzhenwu	FIRST_SUBMISSION	0.9641000543	0.6895229816	0.9641000543	0.5825071335	0.9641000543	0.8608663082
4	4	liuzhenwu	FOURTH_SUBMISSION	0.9641000543	0.8419218063	0.9641000543	0.5171837807	0.9641000543	0.6155939102
5	5	liuzhenwu	FIFTH_SUBMISSION	0.9641000543	0.7852628231	0.9641000543	0.5111699104	0.9641000543	0.7217628956

3.1.3 How to Transition from Codalab to Codabench?

Codabench serves as a modern, faster, and more reliable upgrade to [CodaLab](#), designed to supersede it. This quick guide is meant for CodaLab users wondering how to successfully adopt this new challenge platform.



What's new in Codabench?

Codabench includes all features from [CodaLab Competitions](#), and proposes a faster and more intuitive interface. It also has new features such as:

- Live logs during submission processes
- Storage quotas
- [Computation servers management](#) for all users.

It also emphasizes on benchmarking, allowing dataset submissions and multiple leaderboard rows per user. Finally, future project development and maintenance will be focused on Codabench.

Do I need to create a new account?


Yes, even if you previously had a CodaLab account, you need to [create a new account](#) on Codabench. Sign up is quick and free. From there, as a competition participant, you are all set.

The next questions concern competition organizers.


Can I upload my old competition bundles to Codabench?

Yes! That is the good news: competition bundles are back-compatible. This means that you can upload your CodaLab competition bundles into Codabench without any modifications and have them working just fine.

Simply go to "*Benchmarks > Management*", then click on "*Upload*" and select your competition bundle.

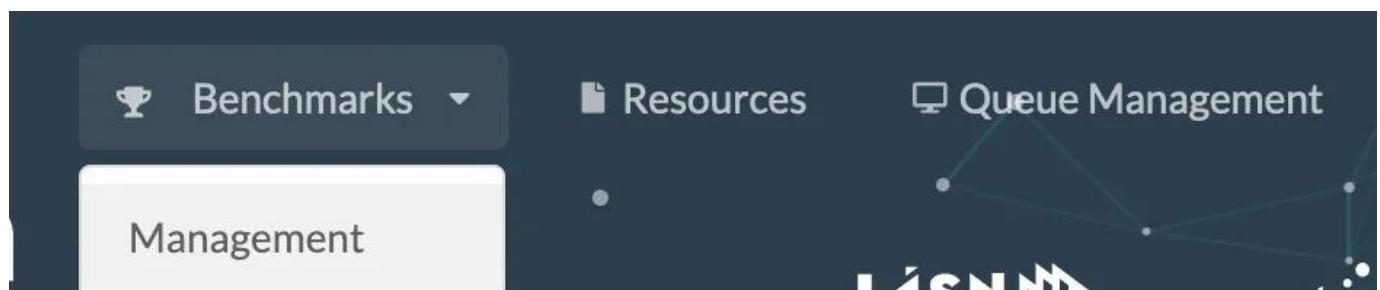

Go to "*Benchmarks > Management*".

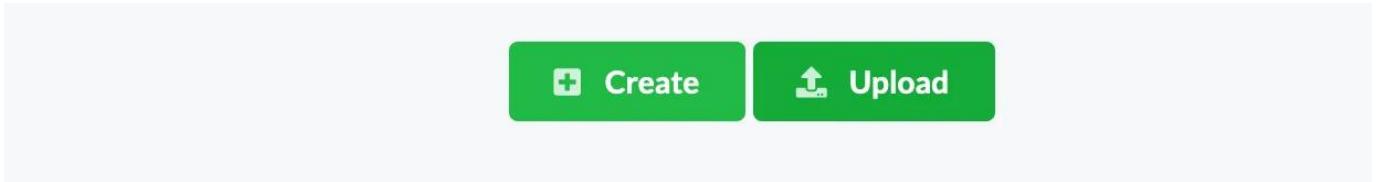

Click on "Upload" and select your competition bundle.

That's it! Your competition is ready to receive submissions.

How to move a competition from CodaLab to Codabench?

If your competition is already live on CodaLab, that is fine too. You simply need to create a dump, download it and re-upload it on Codabench.

Dumps for: Paris Region AI Challenge for Industry 2020				
Download link	Status	Size	Publish Date	Delete
Download	Finished	0.05 mb	July 12, 2024, 6:03 p.m.	Delete

Go to "Dumps" organizer interface.

Dumps for: Paris Region AI Challenge for Industry 2020				
Download link	Status	Size	Publish Date	Delete
Download	Finished	0.05 mb	July 12, 2024, 6:03 p.m.	Delete

Click on "Create Dump" then "Download". You'll obtain a competition bundle that you'll be able to re-upload on Codabench, following the instructions of the previous section.

 Leaderboard results won't be transferred. For that, you'll need to re-submit the submissions.

How to create a competition from scratch on Codabench?

If you don't have any previous competition, and want to learn how to create one from scratch, please refer to the [Getting started guide](#).

Concluding remarks

Codabench, the new version of the competition and benchmark platform CodaLab, was launched on August 2023 and is already receiving great attention. For users accustomed to CodaLab, the transition to Codabench is quick and easy. Indeed, competition bundles are back-compatible, and all that is required is to create an account on Codabench. To go further, you can refer to [Codabench's Wiki](#).

3.1.4 Competition Creation

Competition creation can be done two ways. Through the online form on Codalab, or by uploading a competition bundle to Codalab.

Bundle Upload

For more information on Bundle Upload see here:

[Competition Creation: Bundle](#)

For more information on Competition Bundle Structure, see here:

[Competition Bundle Structure](#)

GUI creation

For more information on GUI creation see here:

[Competition Creation: Form](#)

3.1.5 Competition Creation Form

Competitions can now be created through a wizard/form. This page will cover each different tab of the competition form correlating to a section, and the fields for each section.

Details

The details tab covers all basic competition info, such as title, logo, description, and the queue used.

The screenshot shows the 'Details' tab of the competition creation form. The tab is selected and has a black underline. Below the tab are several input fields:

- Title***: A text input field with a placeholder.
- Logo***: A file input field with a placeholder and a small icon.
- Description**: A rich text editor with a toolbar containing icons for bold (B), italic (I), heading (H), and other text styles. Below the editor is a text area with a character count: lines: 1, words: 0, 0:0.
- Queue**: A dropdown menu showing a single option.

At the bottom of the form are three buttons: **Save and Publish** (blue), **Save as Draft** (grey), and **Discard Changes** (red).

- **Title:** The title of your competition.
- **Logo:** The logo corresponding to your competition
- **Description:** The description of your competition
- **Queue:** If you've previously created a queue through queue management, you can assign it to your competition here.

Participation

The participation tab covers your terms and conditions for the competition, and settings for auto-approval of participants.

Details **Participation** Pages Phases Leaderboard Collaborators

Terms*

B I H | “ “ “ “ | % | ☰ | ?

lines: 1 words: 0 0:0

Auto approve registration requests ?

Save and Publish **Save as Draft** **Discard Changes**

- Terms: Your terms and conditions for the competition.
- Auto Approve Registration: If checked, the organizer is not required to approve new participants.

Pages

In the pages section, you can add any additional content you would like to display to competition participants as pages . (Tabs on the competition detail page).

Details Participation **Pages** Phases Leaderboard Collaborators

Pages

No pages added yet, at least 1 is required!

Add page

Save and Publish **Save as Draft** **Discard Changes**

Clicking `Add page` should present you a modal with the following layout:

Page form

Title *

Content *

B I H | <> = = | <> | <> | ?

lines: 1 words: 0 0:0

Cancel **Save**

- **Title:** The title of the page you are adding
- **Content:** The content of your page formatted as Markdown.

Phases

The phases section allows you to define your phases and their attached tasks.

Details Participation Pages Phases Leaderboard Collaborators

Phases

No phases added yet, at least 1 is required!

Add phase

Save and Publish **Save as Draft** **Discard Changes**

By clicking `Add phase`, you should be presented with a modal for phase creation:

Edit phase

Name *

Start * **End**

Tasks ?

Description *

lines: 1 words: 0 0:0

Advanced ?

Execution Time Limit ? **Max Submissions Per Day** ? **Max Submissions Per Person** ?

Manage Tasks / Datasets
Cancel
Save

- **Name:** The name of your phase
- **Start:** The start day of your phase
- **End:** The end day of your phase
- **Tasks:** Here you can assign one or multiple task objects to your phase. Tasks are problems that the submission should be solving. For more information, see the explanation on competition structure [here](#): If you don't have any tasks created yet, click the green button at the bottom of the new phase modal titled `Manage Tasks/Datasets`
- **Description:** The description of your phase

Advanced

- **Execution Time Limit:** The time limit for submission execution time measured in seconds (Currently the label says this is measured in MS, but this seems to be false)
- **Max submissions per day:** The max submissions allowed for the phase. The time period is from midnight UTC to midnight the next day UTC.
- **Max submissions per person:** The absolute max amount of submissions a participant can make on this phase.

Leaderboards

The leaderboards section allows you to define leaderboards which determine how submissions are scored.

Clicking add leaderboard should bring up this modal:

- Title: The title of your leaderboard
- Key: A unique name to refer to this leaderboard by (Preferably lowercase)

Adding a column will add some fields for the values of the column:

Leaderboard form

Title *	Key <small>?</small> *		
Test	test		
<table border="1"> <tr> <td></td> <td>New Column</td> </tr> </table>			New Column
	New Column		
Primary Column	<input checked="" type="radio"/>		
Computation	None		
Sorting	Descending		
Column Key *			
	<small>< ! ></small>		
<div style="text-align: right;"> + Add column Cancel Save </div>			

- Title (Unlabeled top input): The title of your column
- Primary Column: Whether this is the main column in the leaderboard (I.E: Is the sum/average of other columns)
- Computation (None/Average): If average is selected, this column should not have a score submitted to it, and will be a computation of the average of all the other columns.
- Sorting: Determine which way scores are sorted for this column.
- Column Key: A unique key to refer to this column by.

Collaborators

Here you can add other users to your competition as administrators.

<input checked="" type="checkbox"/> Details	<input checked="" type="checkbox"/> Participation	<input checked="" type="checkbox"/> Pages	Phases	<input checked="" type="checkbox"/> Leaderboard	<input checked="" type="checkbox"/> Collaborators			
<table border="1"> <tr> <td>Collaborators</td> </tr> <tr> <td>No collaborators yet!</td> </tr> <tr> <td style="text-align: right;">+ Add collaborator</td> </tr> </table>						Collaborators	No collaborators yet!	+ Add collaborator
Collaborators								
No collaborators yet!								
+ Add collaborator								
<div style="text-align: center;"> Save and Publish Save as Draft Discard Changes </div>								

As per the other pages, clicking `Add collaborator` should bring up a modal. The search text can be the user's email if you know it, or their username.


Add collaborator

Username *


Cancel **Add**

3.1.6 Competition Creation Bundle

This page is relatively simple. It's where you submit a completed competition bundle to Codabench, in order for it to be processed into a competition instance. For more information on competition bundles, see this link here: [Competition Bundle Structure](#).

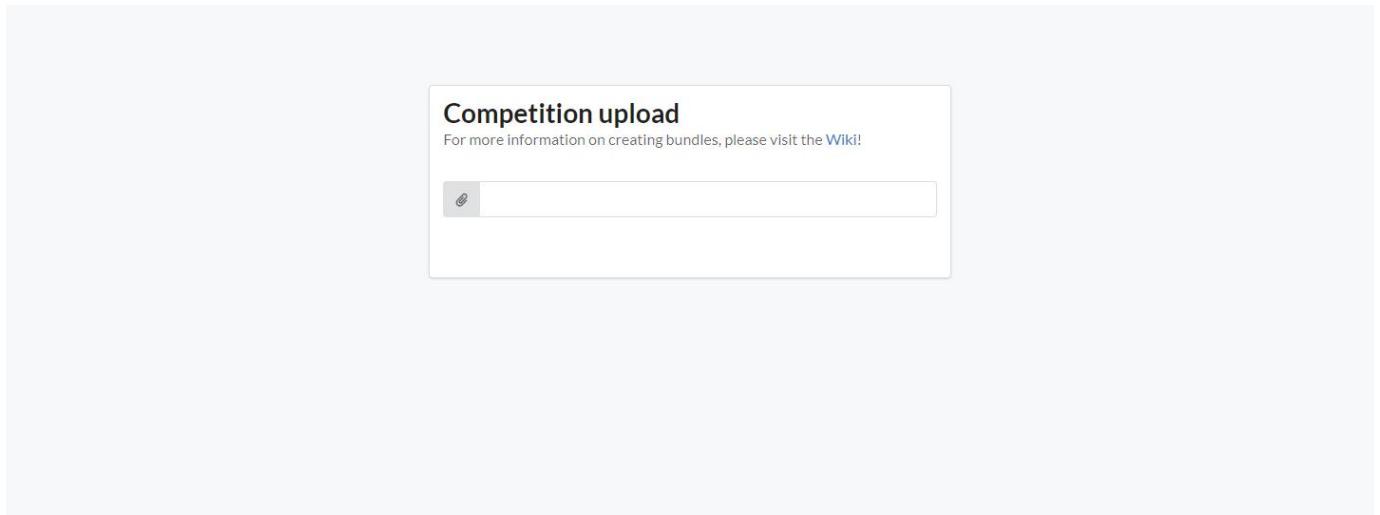

To begin, just click the paper clip icon, or the bar next to it. It should open a file select dialogue. From here, you select your competition bundle, and click upload. Once Codabench is done processing and unpacking your competition, you should be greeted with a success message and a link to your new competition.

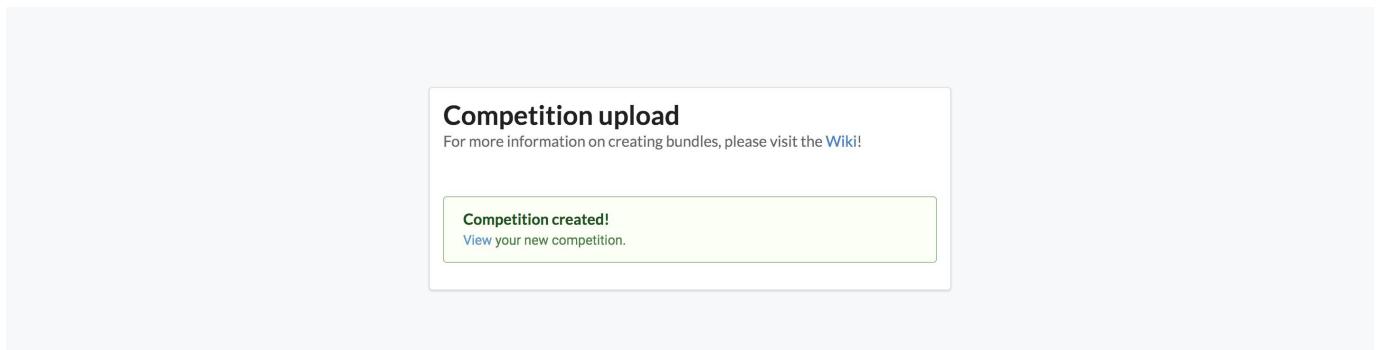

Backward compatibility

If you previously used [CodaLab Competitions](#), note that Codabench is compatible with CodaLab bundles.

3.1.7 Competition YAML Structure

A competition bundle is simply a zip file containing the `competition.yaml` which defines different aspects and attributes of your competition such as the logo, the html/markdown pages documenting your competition, and the data associated with your competition.

What is a Competition?

A competition is composed of a phase or many phases defining the active times of the competition, along with some other settings such as execution time limit. Each phase can have one or more tasks.

A task is the problem the submission should be solving, therefore submissions that solve a task can be thought of as a solution. A task consists of reference data, input data, scoring program, and an ingestion program.

For starting kits in v2, they should be solutions included with the competition bundle. See the example `competition.yaml` or the section Competition YAML below for a link with more info. For more information on the different types of data, see the lower section of this page.

Example Competition Bundle Layout:

Some competition bundle examples!



Note

Files can be under a directory, they just have to be referenced by their full path in the YAML. See the Competition YAML section below.

```
--\ example_competition.zip
|
|- competition.yaml
|- logo.png
|- example_reference_data.zip
|- example_scoring_program.zip
|- example_solution.zip
|- overview.md
|- evaluation.md
|- terms_and_conditions.md
|- data.md
```

Example competition.yaml:

```
competition.yaml

title: Example Competition Submit Scores
description: An example competition where submissions should output the score they want
image: logo.jpg
terms: terms.md
pages:
  - title: overview
    file: overview.md
  - title: evaluation
    file: evaluation.md
  - title: terms
    file: terms_and_conditions.md
  - title: data
    file: data.md
phases:
  - index: 0
    name: First phase
    description: An example phase
    start: 2018-03-01
    end: 2027-03-01
    tasks:
      - 0
tasks:
  - index: 0
    name: First Phase Task
    description: Task for the first phase
    scoring_program: example_scoring_program.zip
    reference_data: example_reference_data.zip
solutions:
  - index: 0
    path: example_solution.zip
    tasks:
      - 0
```

```

leaderboard:
  - title: Results
    key: main
    columns:
      - title: score
        key: score
        index: 0
        sorting: desc
  
```

Competition YAML

The `competition.yaml` file is the most important file in the bundle. It's what Codabench looks for to figure out the structure and layout of your competition, along with additional details. For more information on setting up a `competition.yaml` see the wiki page here: [Competition YAML](#)

Data Types And Their Role:

REFERENCE DATA:

Reference data is typically the truth data that your participant's predictions are compared against.

SCORING PROGRAM

The scoring program is the file that gets ran to determine the scores of the submission, typically either based on the submission's prediction outputs, or the results from the submission itself when compared with the reference data. Usually this should be a script like a python file, but it can generally be anything.

This is also paired with a `metadata.yaml` file with a key `command` that correlates to the command used to run your scoring program. There are also special directories available for use.

Example: Here's what a `metadata.yaml` might look like:

```

metadata.yaml

command: python3 /app/program/scoring.py /app/input/ /app/output/
  
```

This specifies that python3 is going to run the scoring program (which is going to be located in `/app/program/scoring.py`). It also gives, as `args`:- The input folder, which contains either the user's own results or predictions from ingestion - The output folder where the score is placed.

The arguments are optional, but passing them may be more convenient.

The scoring program outputs a `scores.json` file containing the results for each column of the leaderboard. After computing a submission, this file should look like something like this:

```

scores.json

{"accuracy": 0.886, "duration": 42.4}
  
```

The keys should match the leaderboard columns keys defined in [the `competition.yaml` file](#).

The scoring program can also output detailed results as an HTML file for each submission. [Click here for more information](#).

INGESTION PROGRAM

The ingestion program is a file that gets ran to generate the predictions from the submissions if necessary. This is usually a python script or a script in another language, but it can generally be anything.

The ingestion program is also paired with a `metadata.yaml` that specifies how to run it. It should have a key `command` that is the command used to run your ingestion program. The same special directories should be available to your ingestion program.

Example: Here's what an ingestion `metadata.yaml` might look like this:

```

metadata.yaml

command: python3 /app/program/ingestion.py /app/input_data/ /app/output/ /app/program /app/ingested_program
  
```

Just like the example above, this specifies we're using python to run our ingestion program. Please note that it is not necessary to pass these directories as arguments to the programs, but it can be convenient. More information about the folder layout [here](#).

INPUT DATA

This is usually the test data used to generate predictions from a user's code submission when paired with an ingestion program.

3.1.8 YAML Structure

This page describes all the attributes in the Codabench competition definition language, using [YAML](#). This is used to create configuration files in Codabench competition bundles.

[Iris competition YAML file example!](#)

Versioning

A version for the YAML is required as this platform can support multiple versions of a `competition.yaml` file. For examples of v1.5 bundles, look [here](#).

For all v2 style competition bundles, be sure to add `version: 2` to the top of the `competition.yaml` file.

Note: Not all features of v1.5 competitions are currently supported in v2.

Competition Properties

REQUIRED

- **title:** Title of the competition
- **image:** File path of competition logo, relative to `competition.yaml`
- **terms:** File path to a markdown or HTML page containing the terms of participation participants must agree to before joining a competition

OPTIONAL

- **description:** A brief description of the competition.
- **registration_auto_approve:** True/False. If True, participation requests will not require manual approval by competition administrators. Defaults to False
- **docker_image:** Can specify a specific docker image for the competition to use. Defaults to `codalab/codalab-legacy:py3`. [More information here](#).
- **make_programs_available:** Can specify whether to share the ingestion and scoring program with participants or not. Always available to competition organizer.
- **make_input_data_available:** Can specify whether to share the input data with participants or not. Always available to competition organizer.
- **queue:** Queue submissions are sent to. Can be used to specify competition specific compute workers. Defaults to the standard queue shared by all competitions. The queue should be referenced by its **Vhost**, not by its name. You can find the Vhost in `Queue Management` by clicking the eye button `View Queue Detail`.
- **enable_detailed_results:** True/False. If True, competition will watch for a `detailed_results.html` file and send its contents to storage. [More information here](#).
- **show_detailed_results_in_submission_panel:** a boolean (default: `True`) If set to `True`, participants can see detailed results in the submission panel
- **show_detailed_results_in_leaderboard:** a boolean (default: `True`) If set to `True`, participants can see detailed results in the leaderboard
- **contact_email:** a valid contact email to reach the organizers.
- **reward:** a string to show the reward of the competition e.g. "\$1000" for competition.
- **auto_run_submissions:** a boolean (default: `True`) if set to `False`, organizers have to manually run the submissions of each participant
- **can_participants_make_submissions_public:** a boolean (default: `True`) if set to `False`, participants cannot make their submissions public from submissions panel.
- **forum_enabled:** a boolean (default: `True`) if set to `False`, organizers and participants cannot see or interact with competition forum.

```
# Required
version: 2
title: Compute Pi
image: images/pi.png
terms: pages/terms.md

# Optional
description: Calculate pi to as many digits as possible, as quick as you can.
registration_auto_approve: True
```

```

docker_image: codalab/codalab-legacy:py37 # default docker image
make_programs_available: True
make_input_data_available: False
enable_detailed_results: True
show_detailed_results_in_submission_panel: True
show_detailed_results_in_leaderboard: True
contact_email: organizer_email@example.com
reward: $1000 prize pool
auto_run_submissions: True
can_participants_make_submissions_public: False
forum_enabled: True

```

Pages

REQUIRED

- **title:** String that will be displayed in the competition detail page as the title of the page
- **file:** File path to a markdown or HTML page relative to competition.yaml containing the desired content of the page.

```

pages:
  - title: Welcome
    file: welcome.md
  - title: Getting started
    file: pages/getting_started.html

```

Phases

REQUIRED

- **name:** Name of the phase
- **start:** Datetime string for the start of the competition. ISO format strings are recommended. Use YYYY-MM-DD HH:MM:SS date-time format. (Example date-time: 2024-12-31 14:30:00)
- **end:** Datetime string for the end of the phase (optional for *last phase only*. If not supplied for the final phase, that phase continues indefinitely). Use YYYY-MM-DD HH:MM:SS date-time format. (Example date-time: 2024-12-31 14:30:00)
- **tasks:** An array of numbers pointing to the index of any defined tasks relevant to this phase (see tasks for more information)

OPTIONAL

- **index:** Integer for noting the order of phases, Phases *must* be sequential, without any overlap. If indexes are not supplied, ordering will be assumed by declaration order.
- **max_submissions:** Total submissions allowed per participant for the entire phase
- **max_submissions_per_day:** Submission limit for each participant for a given day
- **auto_migrate_to_this_phase:** Cannot be set on the first phase of the competition. This will re-submit all successful submissions from the previous phase to this phase at the time the phase starts.
- **execution_time_limit:** Execution time limit for submissions, given in seconds. Default is 600.
- **hide_output:** True/False. If True, stdout/stderr for all submissions to this phase will be hidden from users who are not competition administrators or collaborators.
- **hide_prediction_output:** True/False. If True, participants won't be able to download the "Output from prediction step".
- **hide_score_output:** True/False. If True, participants won't be able to download the "Output from scoring step" containing the scores.txt file.
- **starting_kit:** path to the starting kit, a folder that participants will be able to download. Put there any useful files to help participants (example submissions, notebooks, documentation).
- **public_data:** path to public data, that participants will be able to download.
- **accepts_only_result_submissions**(default=False): When set to True, the phase is expected to accept only result submissions.

```

phases:
  - index: 0
    name: Development Phase
    description: Tune your models
    start: 2019-12-12 13:30:00 # Time in UTC+0 and 24-hour format
    end: 2020-02-01 00:00:00 # Time in UTC+0 and 24-hour format
    execution_time_limit: 1200
    starting_kit: starting_kit
    public_data: public_data
    accepts_only_result_submissions: True

```

```

tasks:
  - 0
- index: 1
  name: Final Phase
  description: Final testing of your models
  start: 2020-02-02 00:00:00 # Time in UTC+0 and 24-hour format
  auto_migrate_to_this_phase: True
  accepts_only_result_submissions: False
  tasks:
    - 1

```

Tasks

REQUIRED

- **index:** Number used for internal reference of the task, pointed to by solutions (below) and phases (above)
- **name:** Name of the Task
- **scoring_program:** File path relative to `competition.yaml` pointing to a `.zip` file or an unzipped directory, containing the scoring program

OR

- **key:** UUID of a task already in the database. **If key is provided, all fields other than index will be ignored**

OPTIONAL

- **description:** Brief description of the task
- **input_data:** File path to the data to be provided during the prediction step
- **reference_data:** File path to the data to be provided to the scoring program
- **ingestion_program:** File path to the ingestion program files
- **ingestion_only_during_scoring:** True/False. If true, the ingestion program will be run in parallel with the scoring program, and can communicate w/ the scoring program via a shared directory

```

tasks:
  - index: 0
    name: Compute Pi Developement Task
    description: Compute Pi, focusing on accuracy
    input_data: dev_phase/input_data/
    reference_data: dev_phase/reference_data/
    ingestion_program: ingestion_program.zip
    scoring_program: scoring_program.zip
  - index: 1
    name: Compute Pi Final Task
    description: Compute Pi, speed and accuracy matter
    input_data: final_phase/input_data/
    reference_data: final_phase/reference_data/
    ingestion_program: ingestion_program.zip
    scoring_program: scoring_program.zip

```

Solutions

REQUIRED

- **index:** Index number of solution
- **tasks:** Array of the tasks (referenced internally) for which this solution applies.
- **path:** File path to `.zip` or directory containing the solution data.

```

solutions:
  - index: 0
    path: solutions/solution1.zip
    tasks:
      - 0
      - 1
  - index: 1
    path: solutions/solution2/
    tasks:
      - 0

```

Fact Sheet

OPTIONAL

JSON for asking metadata questions about each submission when they are submitted - **KEY**: Programmatic name for a response. Should not contain any whitespace. - **QUESTION TYPE**: - "checkbox": Prompts the user with a checkbox for a yes/no or true/false type question - **Required SELECTION**: [true, false] - "text": Prompts the user with a text box to write a response. - **Required SELECTION**: "" - "is_required": "false" will allow the user not to submit a response. Otherwise, the user will have to type something. - "select": Gives the user a dropdown to select a value from. - **SELECTION**: Give an array of comma separated values that the user can select from: ["Value1","Value2","Value3",...,"ValueN"] - TIP: If you want this selection to be optional you can add "" as an option. ex. ["", "Value1", ...] and set "is_required": "false" - **is_on_leaderboard**: setting this to "true" will show this response on the leaderboard along with their submission.

STRUCTURE

```

fact_sheet: {
  "[KEY]": {
    "key": "[KEY]",
    "type": "[QUESTION TYPE]",
    "title": "[DISPLAY NAME]",
    "selection": [SELECTION],
    "is_required": ["true" OR "false"],
    "is_on_leaderboard": ["true" OR "false"]
  }
}

fact_sheet: {
  "bool_question": {
    "key": "bool_question",
    "type": "checkbox",
    "title": "boolean",
    "selection": [True, False],
    "is_required": "false",
    "is_on_leaderboard": "false"
  },
  "text_question": {
    "key": "text_question",
    "type": "text",
    "title": "text",
    "selection": "",
    "is_required": "false",
    "is_on_leaderboard": "false"
  },
  "text_required": {
    "key": "text_required",
    "type": "text",
    "title": "text",
    "selection": "",
    "is_required": "true",
    "is_on_leaderboard": "false"
  },
  "selection": {
    "key": "selection",
    "type": "select",
    "title": "selection",
    "selection": [ "", "v1", "v2", "v3" ],
    "is_required": "false",
    "is_on_leaderboard": "true"
  }
}

```

Leaderboards

LEADERBOARD DETAILS

REQUIRED

- **title**: Title of leaderboard
- **key**: Key for scoring program to write to
- **columns**: An array of columns (see column layout below)

OPTIONAL

- **submission_rule**: "Add", "Add_And_Delete", "Add_And_Delete_Multiple", "Force_Last", "Force_Latest_Multiple" or "Force_Best". It sets the behavior of the leaderboard regarding new submissions. See [Leaderboard Functionality](#) for more details.
- **hidden**: True/False. If True, the contents of this leaderboard will be hidden to all users who are not competition administrators or collaborators.

Column Details

REQUIRED

- **title:** Title of the column
- **key:** Key for the scoring program to write to. The keys must match the keys of the `scores.json` file returned by the scoring program, as explained with more details [here](#).
- **index:** Number specifying the order the column should show up on the leaderboard

OPTIONAL

- **sorting:** sorting order for the column: Descending (desc) or Ascending (asc)
 - Ascending: smaller scores are better
 - Descending: larger scores are better
- **computation:** computation to be applied *must be accompanied by computation_indexes*
 - computation options: sum, avg, min, max
- **computation_indexes:** an array of indexes of the columns the computation should be applied to
- **precision:** (integer, default=2) to round the score to *precision* number of digits
- **hidden:** (boolean, default=False) to hide/unhide a column on leaderboard

```
leaderboards:
  - title: Results
    key: main
    submission_rule: "Force_Last"
    columns:
      - title: Accuracy Score 1
        key: accuracy_1
        index: 0
        sorting: desc
        precision: 2
        hidden: False
      - title: Accuracy Score 2
        key: accuracy_2
        index: 1
        sorting: desc
        precision: 3
        hidden: False
      - title: Max Accuracy
        key: max_accuracy
        index: 2
        sorting: desc
        computation: max
        precision: 3
        hidden: False
        computation_indexes:
          - 0
          - 1
      - title: Duration
        key: duration
        index: 3
        sorting: asc
        precision: 2
        hidden: False
```

3.1.9 Competition Docker Image

The competition docker image defines the docker environment in which the submissions of the competitions or benchmarks are run. Each competition can have a different docker environment, referred by its [DockerHub](#) name and tag.


Default competition docker image

The default competition docker image is `codalab/codalab-legacy:py37`. More information here: <https://github.com/codalab/codalab-dockers>

Set up another image

You can select another docker image:

- In the `competition.yaml` file, using `docker_image: username/image:tag`
- In the editor field "Competition Docker image" as shown in the following screenshot:

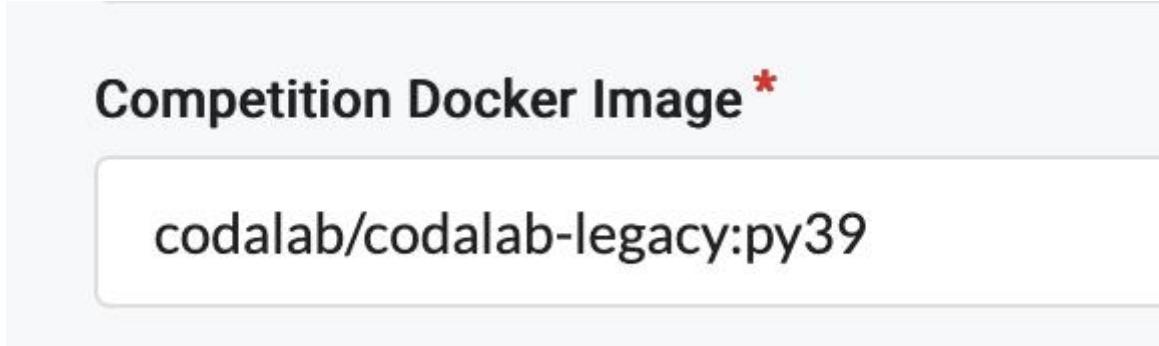

Building an image

If the default image does not suit your needs (missing libraries, etc.), you can either:

- Select an existing image from DockerHub
- Create your own image from scratch
- Create a custom image based on the Codalab image. (more information below)

If you wish to create a custom image based on the Codalab image, you can follow the steps below:



- 1) Install Docker
- 2) Sign up to DockerHub
- 3) `docker run -itd -u root codalab/codalab-legacy:py39 /bin/bash`
- 4) Use `docker ps` to find running container id
- 5) Now run `docker exec -it -u root <CONTAINER ID> bash`
- 6) Install anything you want at the docker container shell (`apt-get install`, `pip install`, etc.)
- 7) Exit the shell with `exit`
- 8) `docker commit <CONTAINER ID> username/image:tag`
- 9) `docker login`
- 10) `docker push username/image:tag`

3.1.10 Dataset Competition Creation and participate instruction

This page focuses on how to create a dataset contest via bundle and make submission for dataset competition

Overall process

The brief process can be summarized in the following diagram

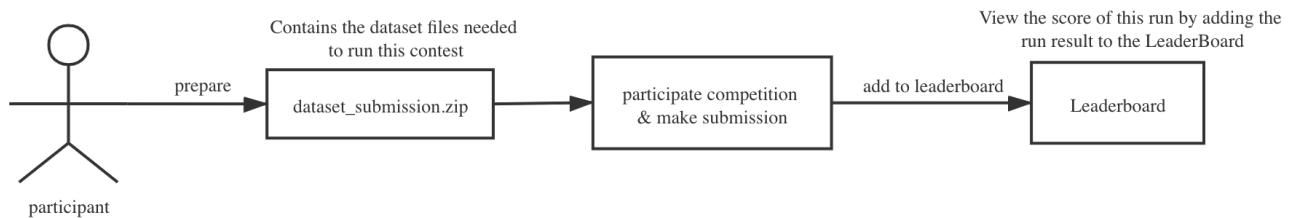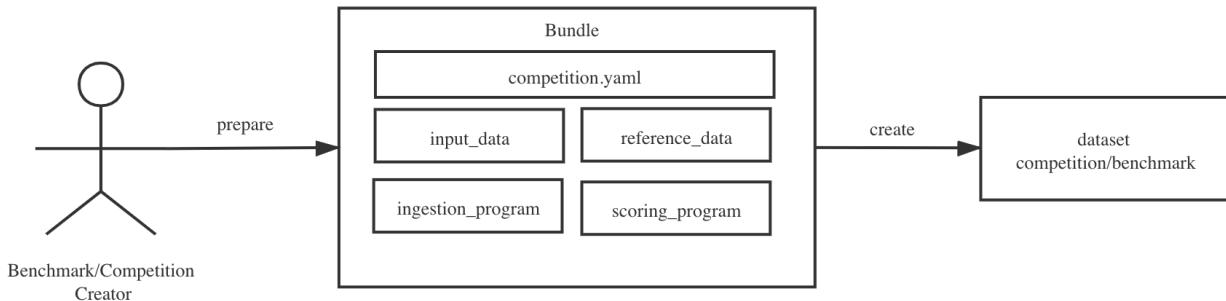

There are two main parts: - the contest organizer creates the dataset competition by uploading a bundle (For more information on how to create a contest via bundle, and the definition of bundle, you can refer to this link [Competition-Creation:-Bundle](#))


- Competition participant submission dataset

Differences from the code submission competition

FOR THE COMPETITION CREATOR

The main difference is the definition of the bundle, which differs from the code commit bundle in 2 ways



Input data

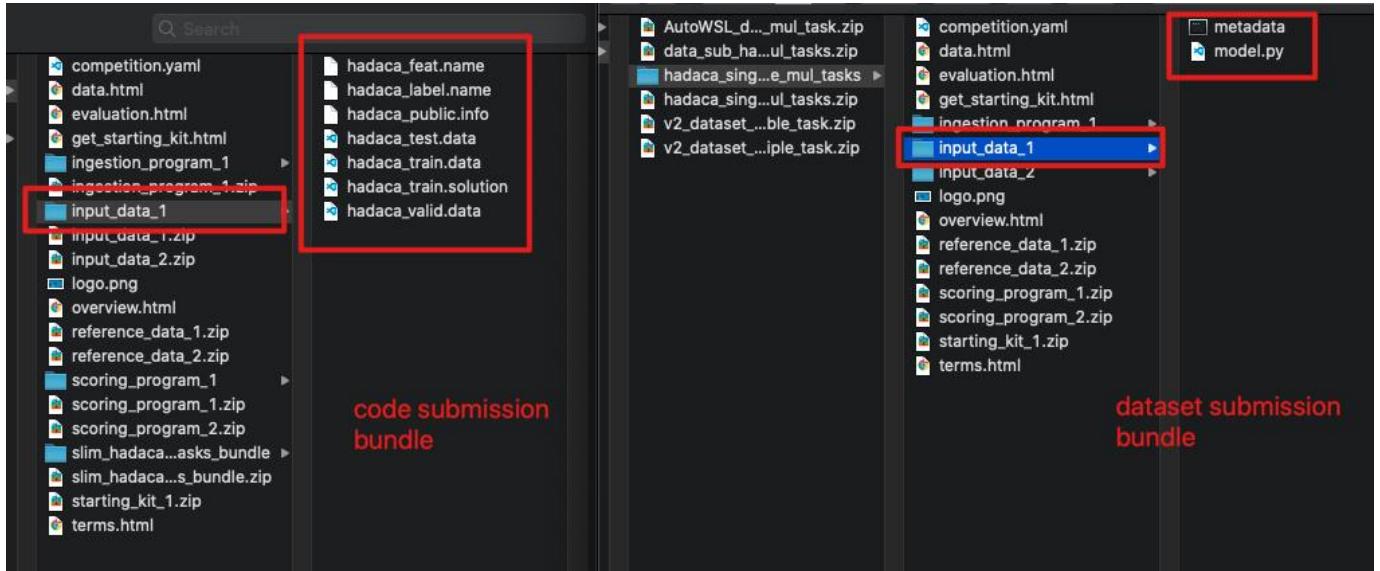

- In the code submission, input data folder is filled with the dataset files


- In the dataset submission, input data folder is filled with the sample code submission files(NB: the sample code submission file is the algorithm file to be submitted by the participants in the code submission.)

Ingestion program

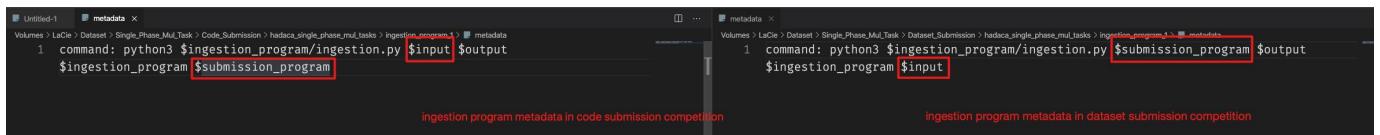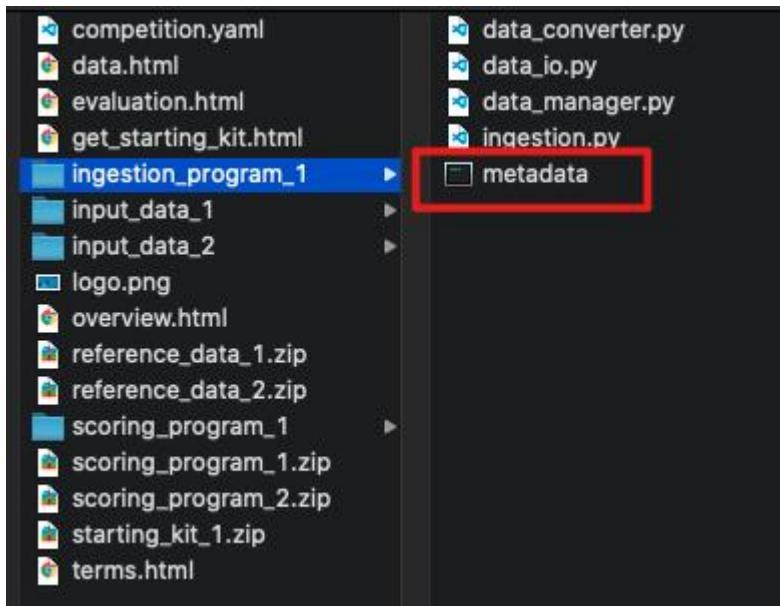

- Unlike the code submission, we need to switch the position of the variables \$input and \$submission_program - In a dataset submission competition, the contents of \$submission_program is the dataset submitted by the participant, and the contents of \$input is the competition creator's built-in sample code submission.

For the competition participant

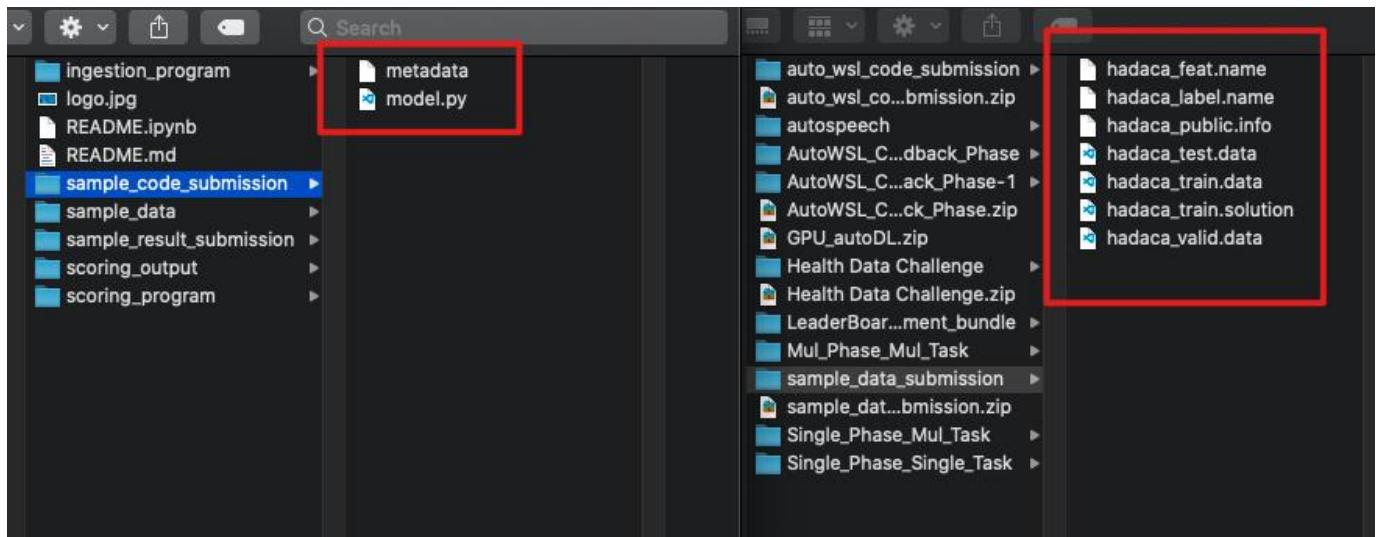

- The left-hand side of the image above shows the contents of the documents that competition participants need to prepare for the code submission competition

- the right-hand side of the image above shows the contents of the documents that competition participants need to prepare for the dataset submission competition
- The competition creator needs to define the bundle by specifying the content of the dataset file to be uploaded
- For example, the right-hand side of the picture shows the contents of the dataset file required for the HADACA competition to run.
- Therefore, when competition participants upload their dataset submission, the zip file must contain all the files shown on the right side of the picture above.

3.1.11 Leaderboard Features

For specific information on leaderboard and column fields, see the explanations in the [YAML structure](#).

Writing scores

A leaderboard and column are written to via their keys. A leaderboard declaration like so

```
leaderboard:
  - title: Results
    key: main
    submission_rule: "Force_Last"
    columns:
      - title: Accuracy Score 1
        key: accuracy_1
        index: 0
        sorting: desc
      - title: Accuracy Score 2
        key: accuracy_2
        index: 1
        sorting: desc
      - title: Max Accuracy
        key: max_accuracy
        index: 2
        sorting: desc
        computation: max
        computation_indexes:
          - 0
          - 1
      - title: Duration
        key: duration
        index: 3
        sorting: asc
```

would require, via the scoring program, the following `scores.json` file

```
scores.json
{"accuracy_1": 0.5, "accuracy_2": 0.75, "duration": 123.45}
```

This is the end result shown on the leaderboard:

```
| Accuracy Score 1 | Accuracy Score 2 | Max Accuracy | Duration |
|:-----:|:-----:|:-----:|:-----:|
| 0.5 | 0.75 | 0.75 | 123.45 |
```

Computation

Scores should not be written to computation columns, instead they will be calculated by the platform at the time scores are read from `scores.json`.

Computation options are: - sum - avg - min - max

These are applied across the columns specified as `computation_indexes`.

So in the example above, the computation option specified is `max` and the indexes are 0 and 1, meaning we will take the max score of columns at index 0 and 1 (i.e: .5 and .75) so .75 is returned in the computation.

Primary columns

Ranking is determined first by the primary column of the leaderboard. In the `competition.yaml`, this is the column at index 0. This option can be changed in the competition editor. After sorting scores by the primary column (asc or desc as specified on the column) sorting then continues from left to right. Final sorting is done by the `submitted_at` timestamp, so that if submissions have identical scores (as in the case of baselines), the earlier submissions will be ranked higher.

Example (with Max Accuracy set as the primary column):

```
| Rank | Accuracy Score 1 | Accuracy Score 2 | Max Accuracy | Duration |
|-----|:-----:|:-----:|:-----:|:-----:|
| 1 | 0.5 | 0.75 | 0.75 | 123.45 |
| 2 | 0.43 | 0.75 | 0.75 | 123.45 |
```

3 0.6 0.6 100 # submitted at Jan 1, 2020
4 0.6 0.6 100 # submitted at Jan 2, 2020

So we sort the submissions by the primary column, (Max Accuracy) and then by columns from left to right, so accuracy 1, then accuracy 2, then duration, then by submission_at.

Submission rules

The submission rule set the behavior of the leaderboard regarding new submissions. Submissions can be forced to the leaderboard or manually selected, can be unique or multiple on the leaderboard, etc.

- **Add:** Only allow adding one submission
- **Add And Delete:** Allow users to add a single submission and remove that submission
- **Add And Delete Multiple:** Allow users to add multiple submissions and remove those submissions
- **Force Last:** Force only the last submission
- **Force Latest Multiple:** Force latest submission to be added to leaderboard (multiple)
- **Force Best:** Force only the best submission to the leaderboard

Here are the corresponding values for the YAML field `submission_rule : "Add", "Add_And_Delete", "Add_And_Delete_Multiple", "Force_Last", "Force_Latest_Multiple" or "Force_Best"`.

Hidden Leaderboard

If a leaderboard is marked as hidden, it will not be visible to participants in the competition. It will only be visible to platform administrators, competition administrators, and competition collaborators.

Downloading Leaderboard Data

If an administrator, competition administrator, and competition collaborator would like to download the current leaderboard data, they will have access to a button labeled "CSV" on the leaderboard page. This creates a downloadable ZIP file. Each CSV file inside will be titled with the name of the leaderboard. The first row of the CSV is the title for each column, followed by all the submissions on the leaderboard. This can be access directly through the API by sending a GET request to `[HOSTNAME]/api/competitions/'ID'/get_csv` where 'ID' is the competition ID.


3.1.12 Example Cancer Benchmarks

This is our use case of cancer benchmarks. This document focuses on how to run the following three bundles in Codabench

- CODABENCH CANCER HETEROGENEITY DT#1 TRANSCRIPTOME PANCREAS
- CODABENCH CANCER HETEROGENEITY DT#2 METHYLOME PANCREAS
- CODABENCH CANCER HETEROGENEITY DT#3 IMMUNE CELL TYPES

Steps

1. DECOMPRESSING THE ORIGINAL BUNDLE

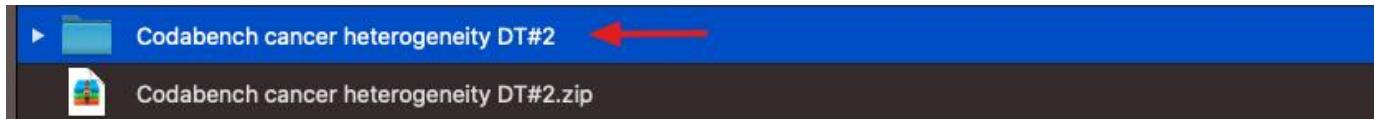


Unzip the bundle from its original zip file format into a folder.

2. DECOMPRESSING INGESTION_PROGRAM_1.ZIP

▼	Codabench cancer heterogeneity DT#2	2020/11/2, 3:56 PM	--	Folder
	competition.yaml	2020/10/21, 11:02 AM	2 KB	YAML
	data.html	2020/10/21, 11:01 AM	1 KB	HTML text
	evaluation.html	2020/10/21, 11:01 AM	1 KB	HTML text
	get_starting_kit.html	2020/10/21, 11:01 AM	Zero bytes	HTML text
▶	ingestion_program_1	Today, 9:11 AM	--	Folder
	ingestion_program_1.zip	2020/11/2, 3:55 PM	2 KB	ZIP archive
	input_data_1.zip	2020/10/21, 11:02 AM	1.77 GB	ZIP archive
	logo.png	2020/10/21, 11:02 AM	48 KB	PNG image
	NO_2.zip	2020/11/2, 3:56 PM	1.95 GB	ZIP archive

3. MODIFY THE SUB_INGESTION.R FILE IN THE INGESTION_PROGRAM_1 FOLDER.

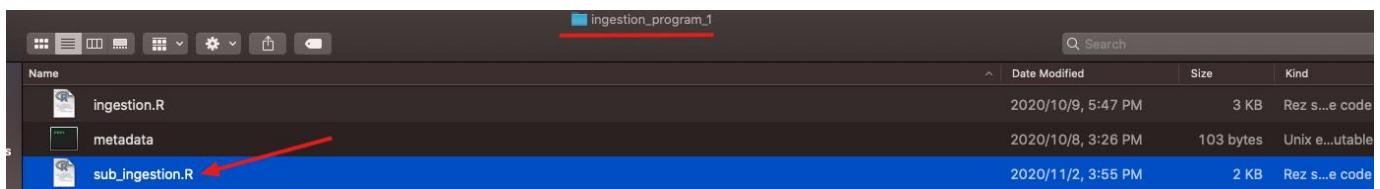

Add lines 19 and 20 of code, and replace the underlined variable in line 25 with submission_program_dir

Two new lines of code have been added to allow the v2 compute worker to find the user-submitted program (program.R). (Because the v2 compute worker does not support searching for user-submitted code in subfolders.)

```

child_dir <- list.files(path=submission_program)
submission_program_dir <- paste0(submission_program, .Platform$file.sep, tail(child_dir, n=1))

// read code submitted by the participants :
.tempEnv <- new.env( )
source(
  file = paste0(submission_program_dir, .Platform$file.sep, "program.R")
, local = .tempEnv
)

```

```

1 args <- commandArgs(trailingOnly = TRUE)
2
3 ## index of the input file :
4 i           <- trimws(x = args[1] )
5 ## input data directory :
6 input        <- trimws(x = args[2] )
7 ## output file :
8 output_results <- trimws(x = args[3] )
9 ## output A :
10 output_A     <- trimws(x = args[4] )
11 ## output T :
12 output_T     <- trimws(x = args[5] )
13 ## directory of the code submitted by the participants :
14 submission_program <- trimws(x = args[6] )
15 ## input k value
16 input_k_value <- as.numeric(trimws(x = args[7] ))
17
18
19 child_dir <- list.files(path=submission_program)
20 submission_program_dir <- paste0(submission_program, .Platform$file.sep, tail(child_dir, n=1))
21
22 ## read code submitted by the participants :
23 .tempEnv <- new.env( )
24 source(
25   file  = paste0(submission_program_dir, .Platform$file.sep, "program.R")
26   , local = .tempEnv
27 )
28
29 #source(
30 #   file  = "MT#0_starting_kit/program.R"
31 #   , local = .tempEnv
32 #)
33
34 ## read input data :
35 D_matrix <- readRDS(file = paste0(input, .Platform$file.sep, "D_met", i, ".rds") )
36 #D_matrix <- readRDS(file = paste0(input, .Platform$file.sep, "D_rna", i, ".rds") )
37 # D_matrix = readRDS("public_data.RDS")
38
39

```

4.SAVE THE CHANGES AND RE-ZIP THE INGESTION_PROGRAM_1 FOLDER.

Open the command line and go to the ingestion_program_1 folder.

```

[base] → ingestion_program_1 tree
.
├── ingestion.R
└── metadata
    └── sub_ingestion.R

0 directories, 3 files
[base] → ingestion_program_1


```

Use the following command to package the modified folder as a zip file `zip -r ingestion_program_1.zip *`

```
[base] → ingestion_program_1 zip -r ingestion_program_1.zip *
  adding: ingestion.R [deflated 70%]
  adding: metadata [deflated 38%]
  adding: sub_ingestion.R [deflated 64%]
[base] → ingestion_program_1 tree
.
├── ingestion.R
├── ingestion_program_1.zip ←
├── metadata
└── sub_ingestion.R


0 directories, 4 files
```

Replace the latest compressed `ingestion_program_1.zip` file with the previous `ingestion_program_1.zip` file, and delete the `ingestion_program_1` folder.

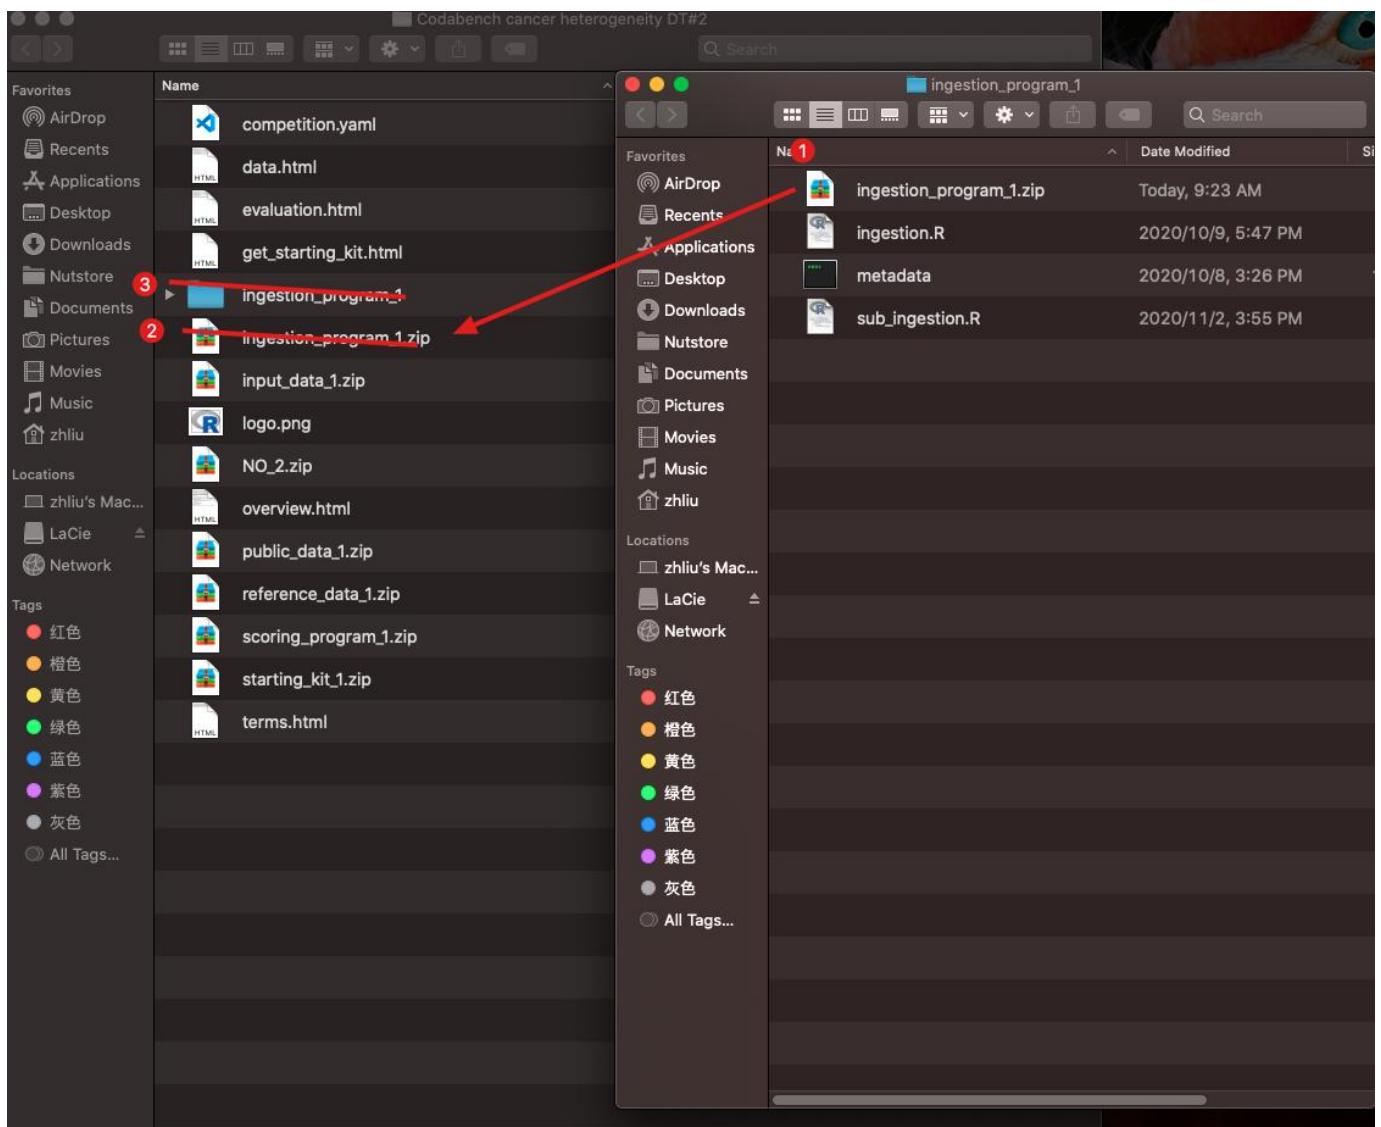

5. RECOMPRESS THE MODIFIED ORIGINAL BUNDLE.

Go to the directory at the same level as `competition.yaml` and execute the following command to compress the file `zip -r Codabench_cancer_heterogeneity_DT#2.zip *`

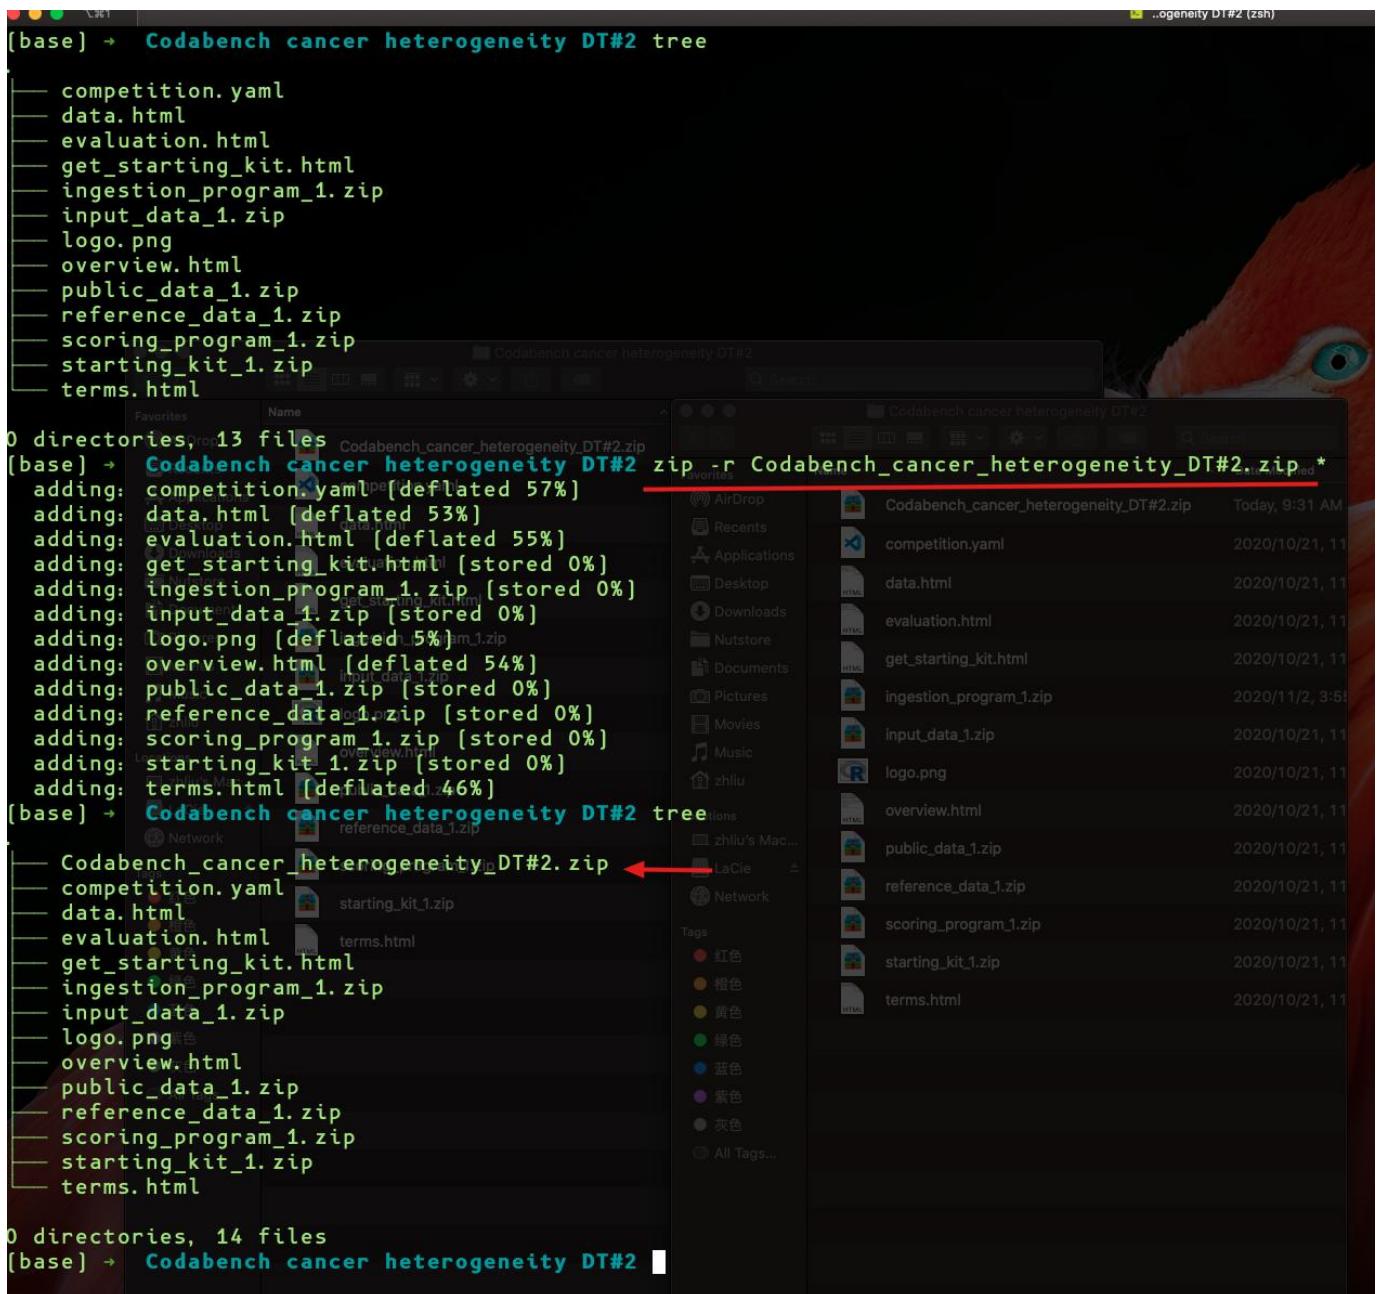

```
[base] → Codabench cancer heterogeneity DT#2 tree
.
└── competition.yaml
    data.html
    evaluation.html
    get_starting_kit.html
    ingestion_program_1.zip
    input_data_1.zip
    logo.png
    overview.html
    public_data_1.zip
    reference_data_1.zip
    scoring_program_1.zip
    starting_kit_1.zip
    terms.html

0 directories, 13 files
[base] → Codabench cancer heterogeneity DT#2 zip -r Codabench_cancer_heterogeneity_DT#2.zip *
adding: competition.yaml [deflated 57%]
adding: data.html [deflated 53%]
adding: evaluation.html [deflated 55%]
adding: get_starting_kit.html [stored 0%]
adding: ingestion_program_1.zip [stored 0%]
adding: input_data_1.zip [stored 0%]
adding: logo.png [deflated 5%]
adding: overview.html [deflated 54%]
adding: public_data_1.zip [stored 0%]
adding: reference_data_1.zip [stored 0%]
adding: scoring_program_1.zip [stored 0%]
adding: starting_kit_1.zip [stored 0%]
adding: terms.html [deflated 46%]
[base] → Codabench cancer heterogeneity DT#2 tree
.
└── Codabench_cancer_heterogeneity_DT#2.zip ←
    competition.yaml
    data.html
    evaluation.html
    get_starting_kit.html
    ingestion_program_1.zip
    input_data_1.zip
    logo.png
    overview.html
    public_data_1.zip
    reference_data_1.zip
    scoring_program_1.zip
    starting_kit_1.zip
    terms.html

0 directories, 14 files
[base] → Codabench cancer heterogeneity DT#2
```

6. CREATING COMPETITION WITH COMPRESSED BUNDLES

7. MODIFY THE DEFAULT EXECUTION TIME

The default execution time is 10 minutes, but since these three bundles are time-consuming to execute, you have to turn it up.

CODABENCH CANCER HETEROGENEITY DT#3 IMMUNE CELL TYPES

ORGANIZED BY: Liuzhenwu
CURRENT PHASE ENDS: September 30, 2021, 8:00 AM GMT+8
CURRENT SERVER TIME: November 12, 2020, 9:07 AM GMT+8
Secret url: https://www.codabench.org/competitions/148/?secret_key=6d53bdc3-47d8-473e-8fe8-4a67247fe32c

Nov 2020 Jan 2021 Mar 2021 May 2021 Jul 2021 Sep 2021

Get Started Phases My Submissions Results ?

Details Participation Pages **Phases** Leaderboard Administrators

1

2

Phases

Phase 1

Add phase

Publish **Save** Discard Changes Back To Competition ?

Edit phase

Name *

Start * End

Tasks (Order will be saved) Note: Adding a new task will cause all submissions to be run against it. ? *

Description

lines: 1 words: 27 0:0

1 ▼ Advanced

Execution Time Limit ? Max Submissions Per Day ? Max Submissions Per Person ?

2 □ Hide Submission Output

Manage Tasks / Datasets Cancel Save

We recommend that you adjust the time to the maximum value of 2147483647, so that the task will not time out and be forced to terminate by the compute worker.

Summary

This paragraph summarizes the results of the execution of three bundles in codalab v2.

CODABENCH CANCER HETEROGENEITY DT#1 TRANSCRIPTOME PANCREAS

<https://www.codabench.org/competitions/147/>

All three submissions were successful.



CODABENCH CANCER HETEROGENEITY DT#1 TRANSCRIPTOME PANCREAS

6 PARTICIPANTS
3 SUBMISSIONS

Edit Participants Submissions Dumps Migrate

ORGANIZED BY: Liuzhenwu
CURRENT PHASE ENDS: September 30, 2021, 8:00 AM GMT+8
CURRENT SERVER TIME: November 12, 2020, 9:41 AM GMT+8
Secret url: https://www.codabench.org/competitions/147/?secret_key=f12149c7-cccd-47f9-bab2-9896e7ba9a25

Nov 2020 Jan 2021 Mar 2021 May 2021 Jul 2021 Sep 2021

Get Started Phases My Submissions Results ?

Phase 1

Submission upload

Search... Status

ID #	File name	Status	Actions
740	MT2_r_WNM.zip	Finished	✓ ↗
737	MT1_r_WIC.zip	Finished	✓ ↗
734	MT0_default_method.zip	Finished	✓ ↗

CODABENCH CANCER HETEROGENEITY DT#2 METHYLOME PANCREAS

<https://www.codabench.org/competitions/174/>

Two Submissions were successfully run, while the third failed due to insufficient execution time (We have now adjusted from the original 10,000 minute execution time limit to a maximum of 2,147,483,647.)

[Download as CSV](#)
 [Rerun all submissions per phase](#)

Search...

Phase
Status

ID #	File name	Owner	Phase	Status	Actions
1089	MT2_r_WNM.zip	liuzhenwu	Phase 1	Running	
1084	MT2_r_WNM.zip	liuzhenwu	Phase 1	Failed	
1064	MT2_r_WNM.zip	liuzhenwu	Phase 1	Failed	
953	MT1_r_WIC.zip	liuzhenwu	Phase 1	Finished	
952	MT2_r_WNM.zip	liuzhenwu	Phase 1	Failed	
945	MT1_r_WIC.zip	liuzhenwu	Phase 1	Cancelled	
944	MT0_default_method.zip	liuzhenwu	Phase 1	Finished	

CODABENCH CANCER HETEROGENEITY DT#3 IMMUNE CELL TYPES

<https://www.codabench.org/competitions/148/>

2 Submissions run successfully, 1 execution fails (screenshot below)

CODABENCH CANCER HETEROGENEITY DT#3 IMMUNE CELL TYPES

Organized by: Liuzhenwu

CURRENT PHASE ENDS: September 30, 2021, 8:00 AM GMT+8

CURRENT SERVER TIME: November 12, 2020, 9:46 AM GMT+8

Secret url: https://www.codabench.org/competitions/148/?secret_key=6d53bdc3-47d8-473e-8fe8-4a67247fe32c

Timeline: Nov 2020, Jan 2021, Mar 2021, May 2021, Jul 2021, Sep 2021

Get Started Phases My Submissions Results ?

Phase 1

Submission upload

Search... Status

ID #	File name	Status	Actions
739	MT1_r_WIC.zip	Failed	✖
738	MT2_r_WNM.zip	Finished	✓
736	MT1_r_WIC.zip	Failed	✖
735	MT0_default_method.zip	Finished	✓

Failed execution screenshot:

DOWNLOADS LOGS VISUALIZATION

Prediction Logs Scoring Logs

stdout stderr Ingestion stdout Ingestion stderr

```
Error in compare_A(A_r = Aref, A_est = Aest) :
  ncol(x = A_est) == N is not TRUE
Calls: scoring_function -> compare_A -> stopifnot
Execution halted
```

3.1.13 Public Tasks and Tasks Sharing

Codabench tasks are a combination of datasets and programs:

- Scoring program
- Ingestion program
- Input data
- Reference data

A scoring program is required while others are optional in a task.

In the [Codabench Resources Interface](#) you can upload datasets and programs in the `Datasets & Programs` tab and then create a task in the `Tasks` tab.

Example of uploaded datasets and programs:

Submissions		Datasets and programs		Tasks		Competition Bundles		?	
Search...		Filter By Type		<input type="checkbox"/> Show Auto Created <input type="checkbox"/> Show Public		× Delete Selected + Add Dataset/Program			
File Name	Type			Size	Uploaded	In Use	Public	Delete?	
Iris - Reference Data	reference_data			570.6 KB	30 seconds ago			×	<input type="checkbox"/>
Iris - Input Data	input_data			570.6 KB	47 seconds ago			×	<input type="checkbox"/>
Iris - Scoring Program	scoring_program			570.6 KB	66 seconds ago			×	<input type="checkbox"/>
Iris - Ingestion Program	ingestion_program			570.6 KB	118 seconds ago			×	<input type="checkbox"/>

Example of a task created using the above datasets and programs:

Submissions		Datasets and programs		Tasks		Competition Bundles		?	
Search by name...		<input type="checkbox"/> Show Public Tasks		× Delete Selected Tasks + Create Task					
Name	Description			Creator	In Use	Public	Actions		
Iris - Image Classification	The image classification task for the iris dataset involves using images of iris flowers to predict their species (setosa, versicolor, or virginica). The submitted model to this task should train on visual features like petal and sepal dimensions. This task aims to evaluate model accuracy and performance on this well-known dataset using the F1-score metric.			ihsan			✎ ✖	<input type="checkbox"/>	
MNIST - Image Classification	The image classification task for the MNIST dataset involves using images of handwritten digits (0-9) to predict their correct label. The submitted model for this task should train on pixel values of the grayscale images. This task aims to evaluate model accuracy and performance on this widely-used dataset using the precision metric.			ihsan			✎ ✖	<input type="checkbox"/>	
House Price Regression	The regression task involves using a dataset of house features, such as square footage, number of bedrooms, and location, to predict house prices. The submitted model should train on these numerical and categorical features to make accurate price predictions. This task aims to evaluate model performance using the mean squared error (MSE) metric.			ihsan			✎ ✖	<input type="checkbox"/>	

Make a Task Public

You can make a task public that you have created by clicking on the task name to show task details and then click the button `Make Public`

EXAMPLE OF TASK DETAILS:

Iris - Image Classification

[Share Task](#)

The image classification task for the iris dataset involves using images of iris flowers to predict their species (setosa, versicolor, or virginica). The submitted model to this task should train on visual features like petal and sepal dimensions. This task aims to evaluate model accuracy and performance on this well-known dataset using the F1-score metric.


Created By: [ihsan](#)
Uploaded: 4 minutes ago
Shared With:
Used in Competitions:
Has Been Validated : No
Is Public: No

[Make Public](#)

Files	Solutions	
Type	Name	
input_data	Iris - Input Data	
reference_data	Iris - Reference Data	
scoring_program	Iris - Scoring program	
ingestion_program	Iris - Ingestion program	

Search Public Tasks

To search public tasks, you can check the [Show Public Tasks](#) to view public tasks from other users

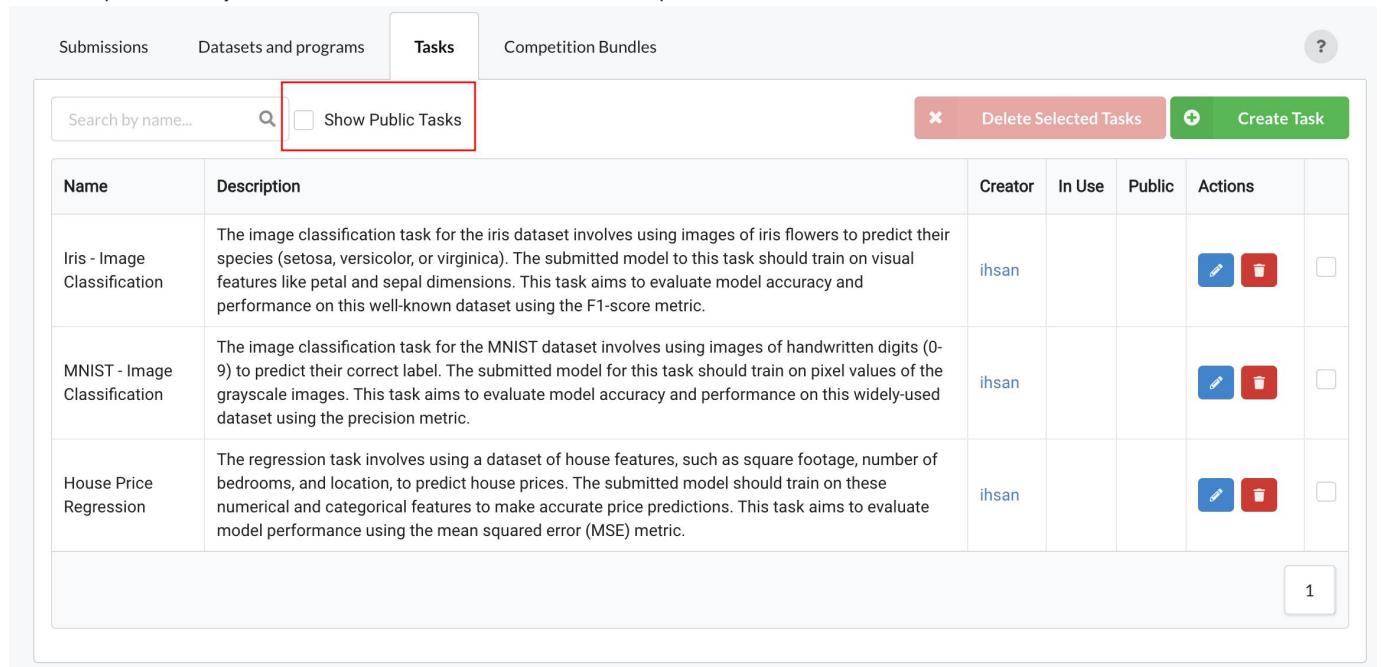

The screenshot shows a user interface for managing tasks. At the top, there are tabs for 'Submissions', 'Datasets and programs', 'Tasks' (which is selected and highlighted in blue), and 'Competition Bundles'. Below the tabs is a search bar with the placeholder 'Search by name...' and a magnifying glass icon. To the right of the search bar is a checkbox labeled 'Show Public Tasks' with a red border around it. Further to the right are buttons for 'Delete Selected Tasks' (with a delete icon) and 'Create Task' (with a plus icon). The main area is a table with the following columns: 'Name', 'Description', 'Creator', 'In Use', 'Public', and 'Actions'. The table contains three rows of data:


Name	Description	Creator	In Use	Public	Actions
Iris - Image Classification	The image classification task for the iris dataset involves using images of iris flowers to predict their species (setosa, versicolor, or virginica). The submitted model to this task should train on visual features like petal and sepal dimensions. This task aims to evaluate model accuracy and performance on this well-known dataset using the F1-score metric.	ihsan			 
MNIST - Image Classification	The image classification task for the MNIST dataset involves using images of handwritten digits (0-9) to predict their correct label. The submitted model for this task should train on pixel values of the grayscale images. This task aims to evaluate model accuracy and performance on this widely-used dataset using the precision metric.	ihsan			 
House Price Regression	The regression task involves using a dataset of house features, such as square footage, number of bedrooms, and location, to predict house prices. The submitted model should train on these numerical and categorical features to make accurate price predictions. This task aims to evaluate model performance using the mean squared error (MSE) metric.	ihsan			 

In the bottom right corner of the table area, there is a small box containing the number '1'.

Use Public Tasks in Competitions


You can use public tasks created by other people in your competitions, to do this follow the steps below:

1. Open your competition and click `Edit` button

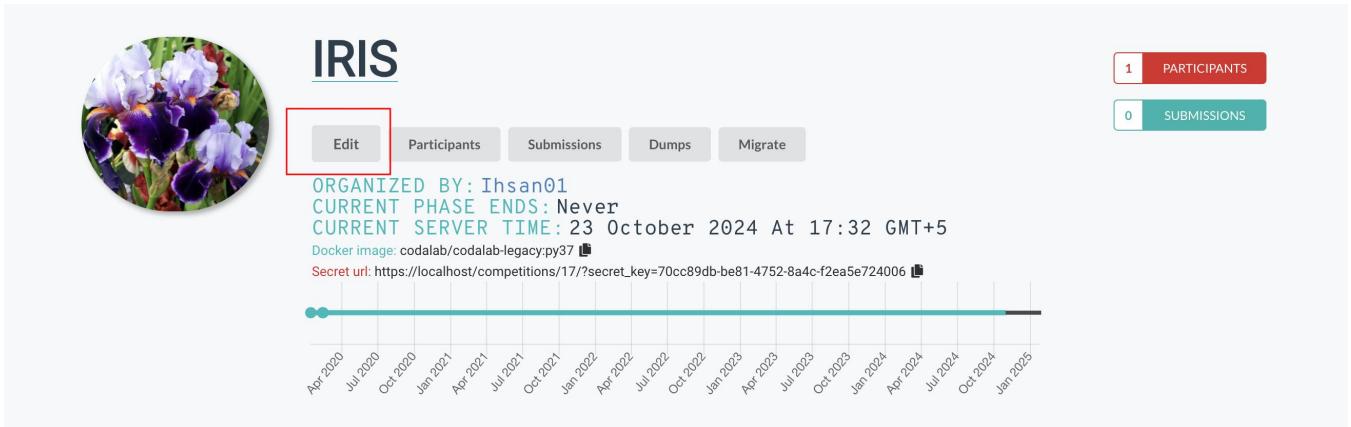


The screenshot shows the IRIS competition dashboard. At the top, there is a circular logo of purple irises. To the right of the logo, the word "IRIS" is displayed in large, bold, black letters. Below the logo, there is a navigation bar with several buttons: "Edit" (highlighted with a red box), "Participants", "Submissions", "Dumps", and "Migrate". To the right of the navigation bar, there are two status boxes: "1 PARTICIPANTS" and "0 SUBMISSIONS". Below the navigation bar, there is a section with competition details: "ORGANIZED BY: Ihsan01", "CURRENT PHASE ENDS: Never", "CURRENT SERVER TIME: 23 October 2024 At 17:32 GMT+5", "Docker image: codalab/codalab-legacy:py37", and "Secret url: https://localhost/competitions/17/?secret_key=70cc89db-be81-4752-8a4c-f2ea5e724006". At the bottom of the dashboard, there is a timeline chart showing the competition's duration from April 2020 to January 2025.

2. Click the `Phases` tab and click the edit button in front of the phase where you want to use a public task

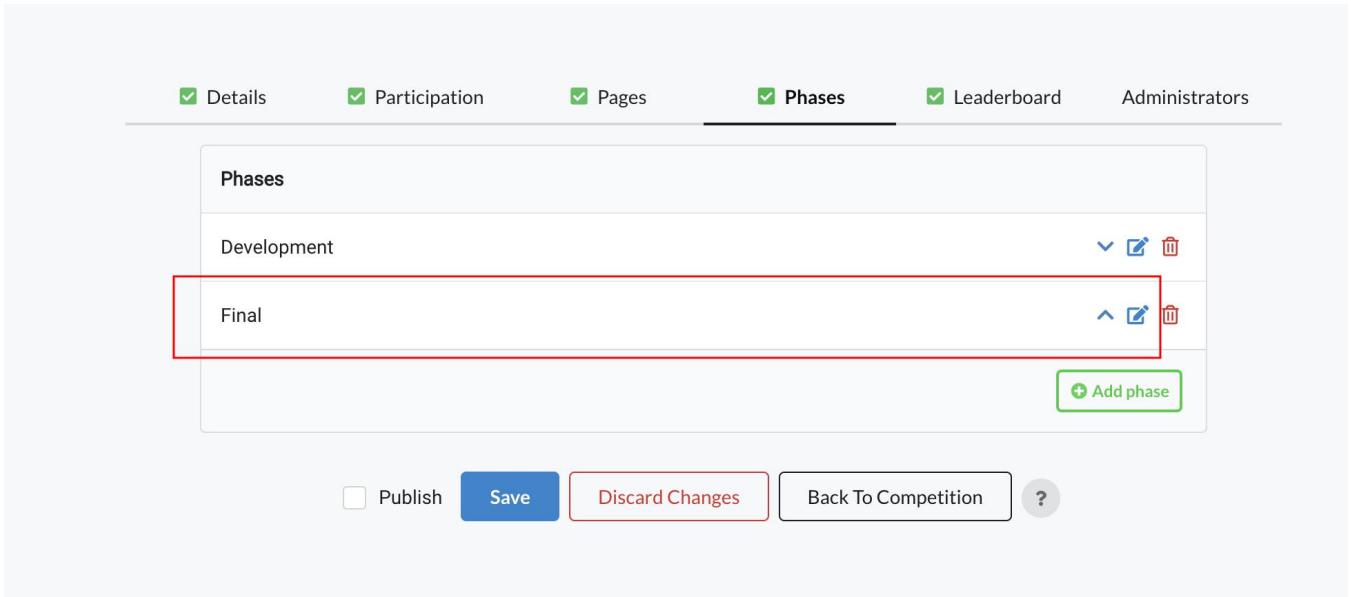

The screenshot shows the "Phases" tab in the competition editor. The tab is highlighted with a red box. Below the tab, there is a list of phases: "Development" and "Final". Each phase has edit, move, and delete icons to its right. At the bottom of the list, there is a green button labeled "+ Add phase". At the bottom of the editor, there are buttons for "Publish", "Save" (highlighted with a red box), "Discard Changes", "Back To Competition", and a help icon.

3. Start writing the task name in the `Tasks` field and the matching task will show up. Click the task in the list to select it

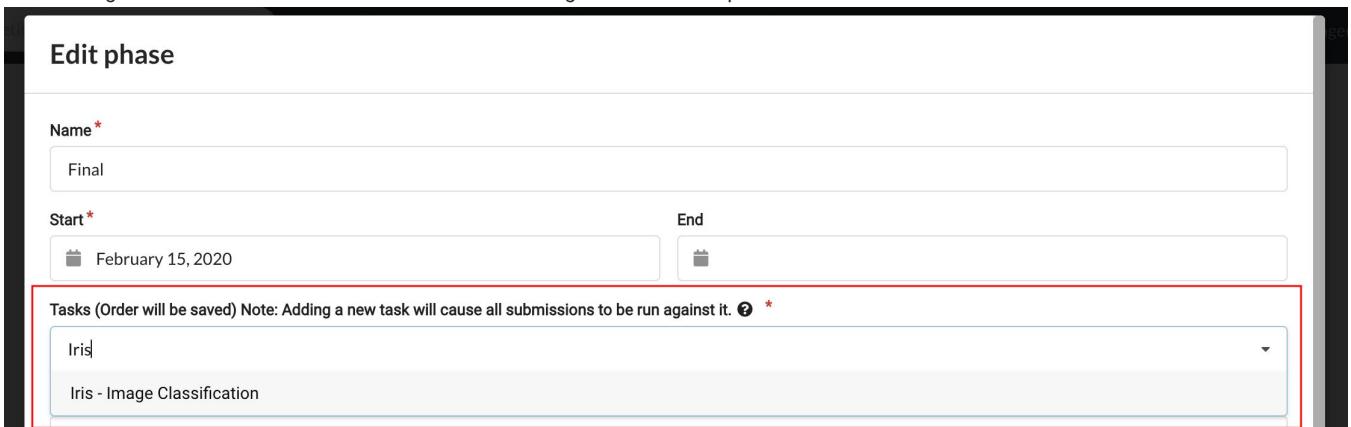

The screenshot shows the "Edit phase" dialog. At the top, it says "Edit phase". Below that, there are fields for "Name*" (containing "Final") and "Start*" (containing "February 15, 2020"). To the right of the start date, there is an "End" field with a calendar icon. Below these fields, there is a section titled "Tasks (Order will be saved) Note: Adding a new task will cause all submissions to be run against it. ⓘ *". In this section, the word "Iris" is typed into a text input field, and a list of tasks appears below it, with "Iris - Image Classification" selected. The entire "Tasks" section is highlighted with a red box.

3.1.14 Detailed Results and Visualization

Detailed results is a means of passing extra information from the scoring program to the frontend.

This is done via writing to a `detailed_results.html` file (OR any `.html` -- first by alphabetical order -- in the output folder), and setting `enable_detailed_results` to `True` in competition settings (via `yaml` or editor).

This file is watched for changes and updated on the frontend every time the file is updated, so users can get a live feed from the compute worker.

There is no limitation to the contents of this HTML file, and can thus be used to relay any information desired. Use case ideas:

- Plot data using a python plot library like `matplotlib` or `seaborn`.
- plot the learning curve over time of a reinforcement learning challenge
- plot the slope of a linear regression model
- plot the location of clusters in a classification challenge
- plot anything you can conceive of
- Run a profiler that outputs a network of method calls.
- Display any additional data about the submission file that can not be distilled down in to a score of some kind

How to include figures

Figures can be included directly inside the HTML code, by converting them in bytes format. An example is given in the [scoring program of the Mini-AutoML bundle](#).

```
scoring.py

[...]

# Path
input_dir = '/app/input'      # Input from ingestion program
output_dir = '/app/output/' # To write the scores
reference_dir = os.path.join(input_dir, 'ref') # Ground truth data
prediction_dir = os.path.join(input_dir, 'res') # Prediction made by the model
score_file = os.path.join(output_dir, 'scores.json')      # Scores
html_file = os.path.join(output_dir, 'detailed_results.html') # Detailed feedback

def write_file(file, content):
    """ Write content in file.
    """
    with open(file, 'a', encoding="utf-8") as f:
        f.write(content)

def make_figure(scores):
    x = get_dataset_names()
    y = [scores[dataset] for dataset in x]
    fig, ax = plt.subplots()
    ax.plot(x, y, 'bo')
    ax.set_ylabel('accuracy')
    ax.set_title('Submission results')
    return fig

def fig_to_b64(fig):
    buf = io.BytesIO()
    fig.savefig(buf, format='png')
    buf.seek(0)
    fig_b64 = base64.b64encode(buf.getvalue()).decode('ascii')
    return fig_b64

def main():
    # Initialized detailed results
    write_file(html_file, '<h1>Detailed results</h1>') # Create the file to give real-time feedback

    [...] # compute the scores

    # Create a figure for detailed results
    figure = fig_to_b64(make_figure(scores))
    write_file(html_file, f'')
```

Example


When the visualization is enabled, a link to the detailed results can be found on the leaderboard for each submission:

Results								
	Fact Sheet Answers	Development Task						
Method name	Average Accuracy	Dataset 1	Dataset 2	Dataset 3	Dataset 4	Duration	Detailed Results	
Random Forest	0.9	0.86	0.79	0.97	1.0	3.08	Show detailed results	
K-Nearest Neighbors	0.87	0.77	0.76	0.96	1.0	1.4	Show detailed results	
Decision Tree	0.87	0.81	0.69	0.97	1.0	0.22	Show detailed results	
MultiLayer Perceptron	0.86	0.79	0.67	0.99	1.0	3.02	Show detailed results	
Gaussian NB	0.85	0.79	0.77	0.92	0.91	0.12	Show detailed results	

The `detailed_results.html`, generated by the scoring program, is then shown:

Detailed Results

Detailed results

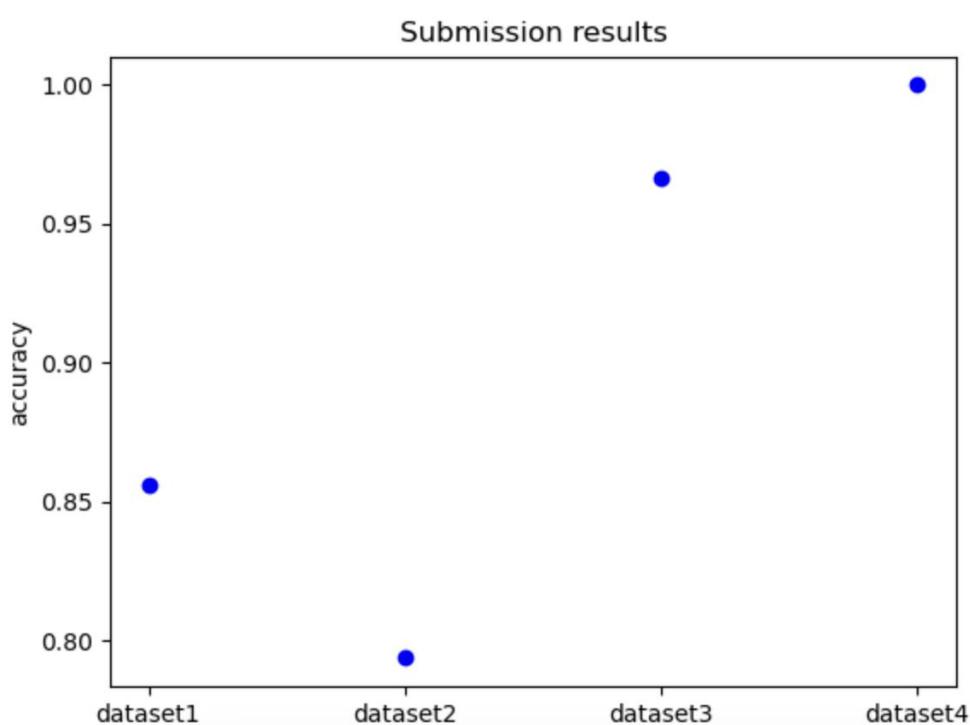


3.2 Running a Benchmarks

3.2.1 Benchmark Management & List Page

This page will show you how to create, manage, edit and delete your competitions.

It will also show you how to track the competitions you are currently in.

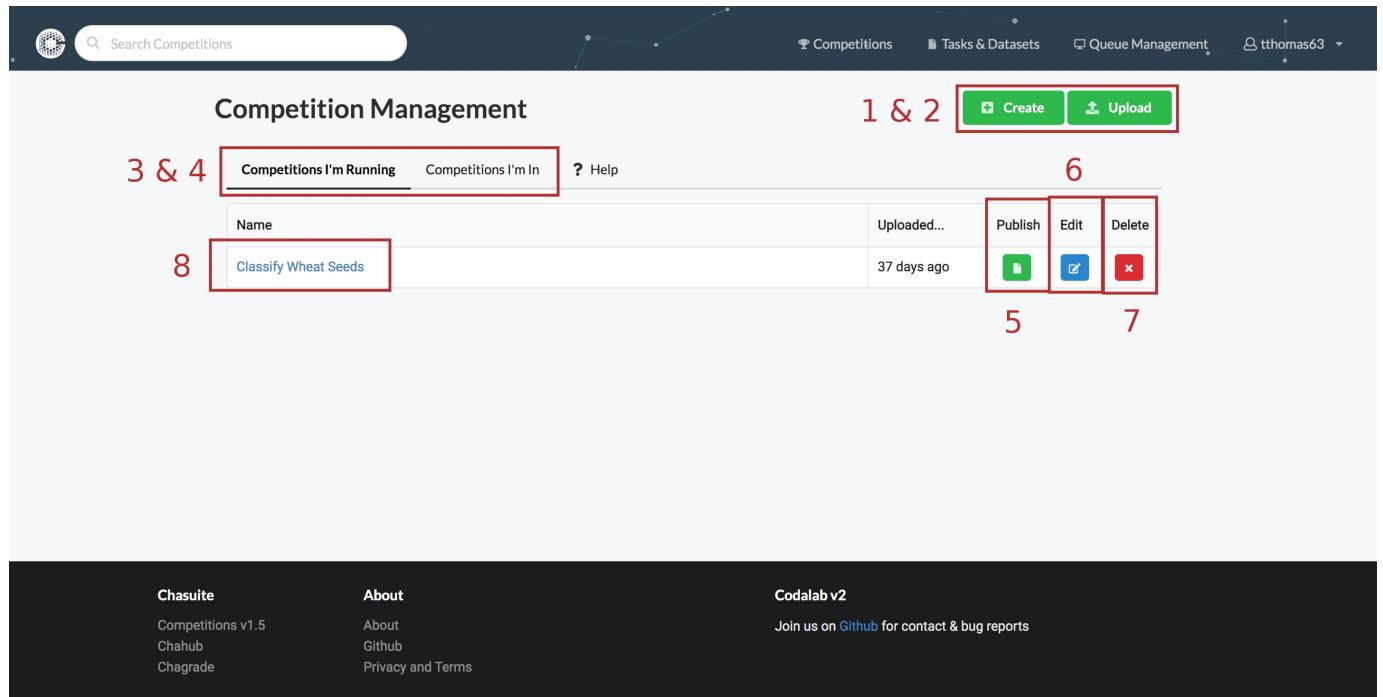

The screenshot shows the 'Competition Management' page. At the top, there is a navigation bar with a search bar, a user icon, and links for 'Competitions', 'Tasks & Datasets', 'Queue Management', and a user account. Below the navigation is a title 'Competition Management' and a tab bar with 'Competitions I'm Running' (selected) and 'Competitions I'm In'. A 'Create' button and an 'Upload' button are in the top right. The main area shows a table with a single competition entry:

Name	Uploaded...	Publish	Edit	Delete
Classify Wheat Seeds	37 days ago			

Below the table are numbered callouts: 1 & 2 (Create/Upload buttons), 3 & 4 (Competitions I'm Running tab), 5 (Edit icon), 6 (Delete icon), 7 (Delete icon), and 8 (Classify Wheat Seeds entry). At the bottom, there is a footer with links for Chasuite, About, and Codalab v2, along with a GitHub link for contact and bug reports.

Competition create button (Form)

This button will take you to the wizard/form for creating competitions. This will allow you to walk through each step of creating a competition using our creation/edit form. For more information on this form/wizard, please see the following link: [Competition Creation: Form](#)

Competition create button (Upload)

This button will take you to the upload page for competition bundles. Here you will be able to upload a competition bundle, and if it is validated and processed successfully, you should see a link to your new competition. For more information on this page, please see the following link: [Competition Creation: Bundle](#)

Competitions I'm running tab

This should be the default selection for the tab navigation at the top. Having this selected will show you all the competitions you currently run/manage, and the available actions for them.

Competitions I'm in tab

Clicking on this tab will change the main view of the page. You should now see a list of competitions you're competing in (Without any competition administrator options). Clicking any of these titles should bring you to the competition detail page of that competition.

Publish competition button

This button will publish your competition in order to make it publicly available. If your competition is already published, this button will appear green and be used to remove your competition from public availability (it will not be deleted). By default, if your competition is un-published, it appears grey.

Edit competition button

This button will take you to the wizard/form for editing competitions. For more information on the competition edit form, please see the link [here](#)

Delete competition button

Deletes your competition. There will be a confirmation dialogue before deletion. We cannot recover deleted competitions.

Competition link

A link to the competition's detail page where users can register, make submissions, view the leaderboard and terms, etc. For more information about the competition detail page, see the link [here](#)

The competition detail page is the main way to interact with competitions. This is where your participants (Or if you are a participant) will read the pages you uploaded, register, make submissions, and check results.

The screenshot shows the Mini-AutoML competition detail page. The top navigation bar includes a logo, the competition name 'MINI-AUTOML', and two buttons: '4 PARTICIPANTS' and '30 SUBMISSIONS'. Below the navigation is a timeline showing the current phase ends on August 1, 2024, and the current server time is May 31, 2024. A Docker image and secret URL are also listed. A blue circle labeled '1' highlights the 'Edit' button in the top navigation bar. A blue circle labeled '2' highlights the 'Secret url' link. A blue circle labeled '3' highlights the 'Get Started' tab in the navigation bar. A large blue circle labeled '4' highlights the 'Overview' tab in the competition detail pane.

MINI-AUTOML

1 Edit Participants Submissions Dumps Migrate

ORGANIZED BY: Pavao

CURRENT PHASE ENDS: 1 Août 2024 à 02:00 UTC+2

CURRENT SERVER TIME: 31 Mai 2024 à 15:52 UTC+2

Docker image: codalab/codalab-legacy:py39

Secret url: https://www.codabench.org/competitions/1187/?secret_key=d40e2b77-8e98-4fa4-a613-56e163228294

Mar 2023 May 2023 Jul 2023 Sep 2023 Nov 2023 Jan 2024 Mar 2024 May 2024 Jul 2024

Get Started Phases My Submissions Results Forum ?

4 Overview Data Evaluation Terms

Mini-AutoML Benchmark

Mini-AutoML is a benchmark template for Codabench, featuring code submission to multiple datasets. This benchmark involves two phases:

- Feedback phase, with 4 datasets,

- 1) Editor (organizer feature)
- 2) Copy competition secret URL (Document icon, secret URL covered)
- 3) Competition Detail Tab Navigation

- Get Started
- Phases
- My Submissions
- Results
- Forum (if enabled)

- 4) Competition Detail Tab Pane Navigation

Competition organizer features

These features are only for competition organizers.

- Editor
- Manage participants
- Manage submissions
- Manage dumps (save the current state of the competition as a bundle)
- Migration

SUBMISSIONS

From here, you can: - Delete submissions - Re-run submissions - Set a submissions score - Force a submission to leaderboard


You can also view the logs, and all output associated with a submission.

<input type="checkbox"/> All	ID #	File name	Owner	Phase	Date	Status	Score	Detailed Results	Actions
<input type="checkbox"/>	65425	sample_code_submission.zip	pavao	Development	2024-05-28 15:49	Finished	0.86		
<input type="checkbox"/>	65423	sample_code_submission.zip	pavao	Development	2024-05-28 15:37	Finished	0.87		
<input type="checkbox"/>	53446	sample_code_submission.zip	pavao	Development	2024-04-03 13:20	Finished	0.86		

- Download CSV: Download a CSV file with all submission info
- Re-run all submissions per phase: Re-runs all submissions in a phase.
- Search: Used to search for a submission by file name
- Phase: Used to filter submissions by phase
- Status: Used to filter submissions by status
- Action Buttons:
 - Blue Circular Arrow: Re-runs the submission
 - Yellow Cross: Cancels the current submission if it is running
 - Red Trash Can: Deletes the submission
 - Green arrow: Puts this submission on the leaderboard

PARTICIPANTS

From here, you should be able to: - Email all participants - Approve/Deny participants - Revoke participants

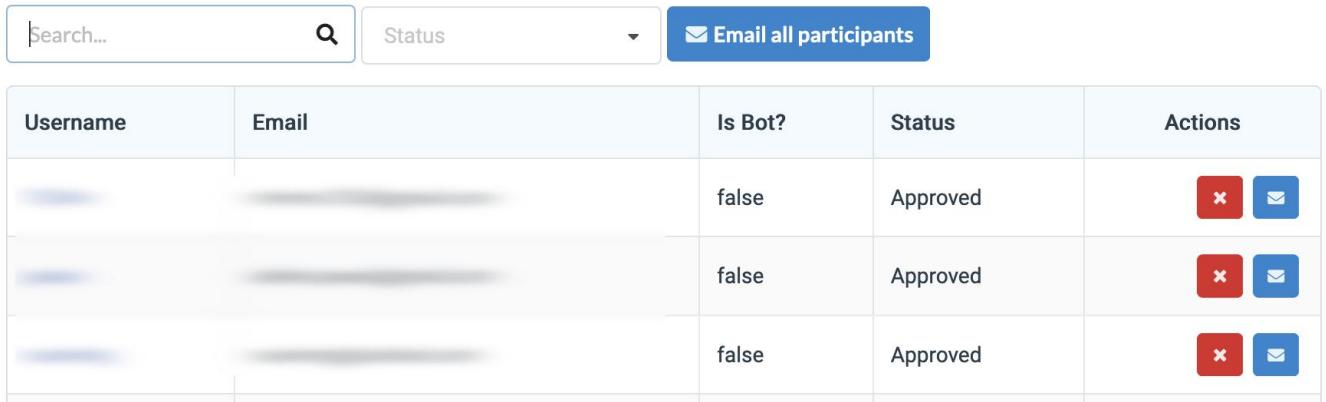

Username	Email	Is Bot?	Status	Actions
...	...	false	Approved	 
...	...	false	Approved	 
...	...	false	Approved	 

- Search: Search for a participant by username or email address.
- Status: Filter participants by status
- Email Participants: Opens a modal to email all participants:
- Subject: The email subject
- Content: The email content

Send Email

Subject

A message from the admins of Mini-AutoML

Content

B *I* **H** | “ “ |   |   |  

COPY COMPETITION SECRET URL


Clicking the document icon copies the competition secret URL to your clipboard.

3.2.2 Competition Detail Tab Navigation

Used to navigate between the different sections of the competition detail page.

GET STARTED

Contains all the organizer made pages, and some defaults.

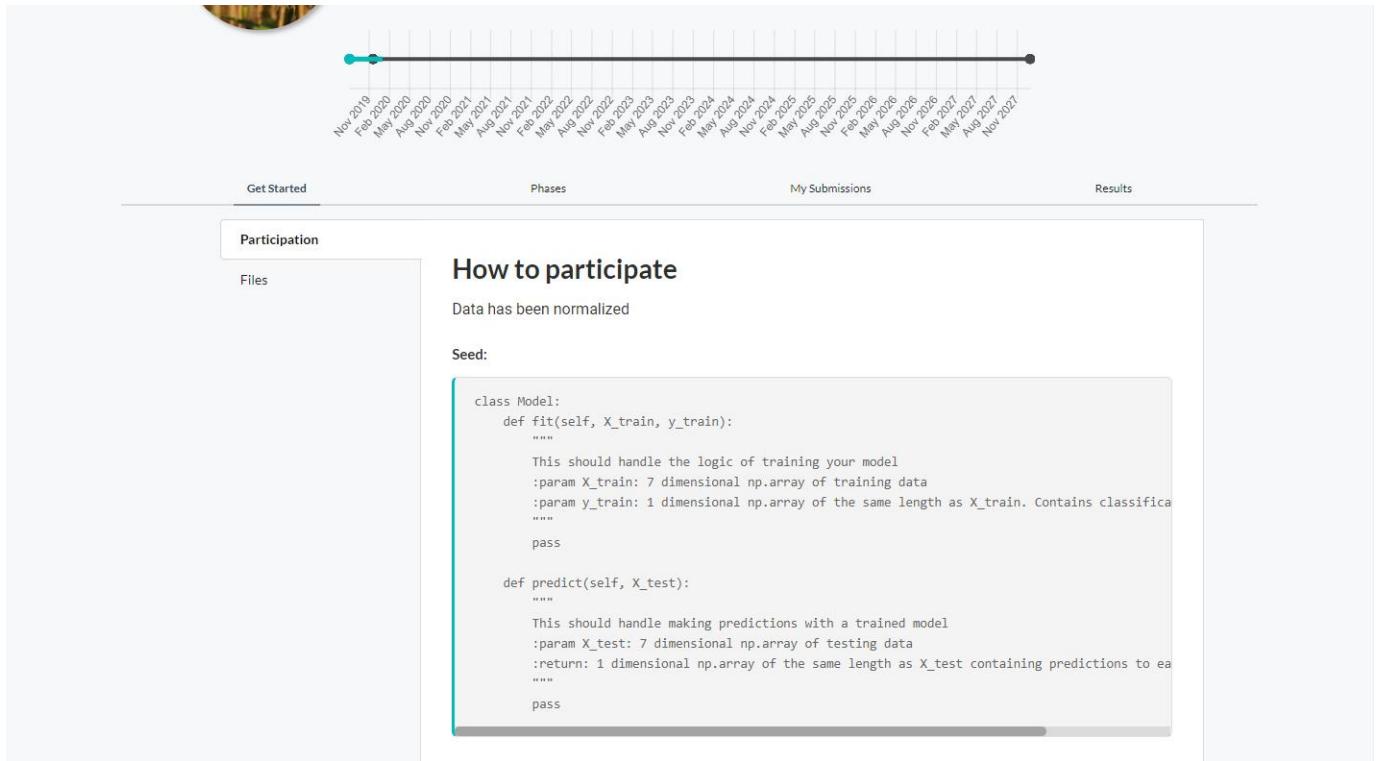

The screenshot shows the 'Participation' tab of a competition detail page. At the top, there is a horizontal timeline from Nov 2019 to Nov 2027. Below the timeline, there are tabs: 'Get Started', 'Phases', 'My Submissions', and 'Results'. The 'Phases' tab is currently selected. On the left, there is a sidebar with 'Participation' and 'Files' sections. The main content area is titled 'How to participate' and contains the text 'Data has been normalized'. Below this, there is a 'Seed:' section with the following Python code:

```


class Model:
    def fit(self, X_train, y_train):
        """
        This should handle the logic of training your model
        :param X_train: 2 dimensional np.array of training data
        :param y_train: 1 dimensional np.array of the same length as X_train. Contains classification labels
        """
        pass

    def predict(self, X_test):
        """
        This should handle making predictions with a trained model
        :param X_test: 2 dimensional np.array of testing data
        :return: 1 dimensional np.array of the same length as X_test containing predictions to each data point
        """
        pass

```

PHASES

Contains a diagram list with details on each phase in the order in which they're active.

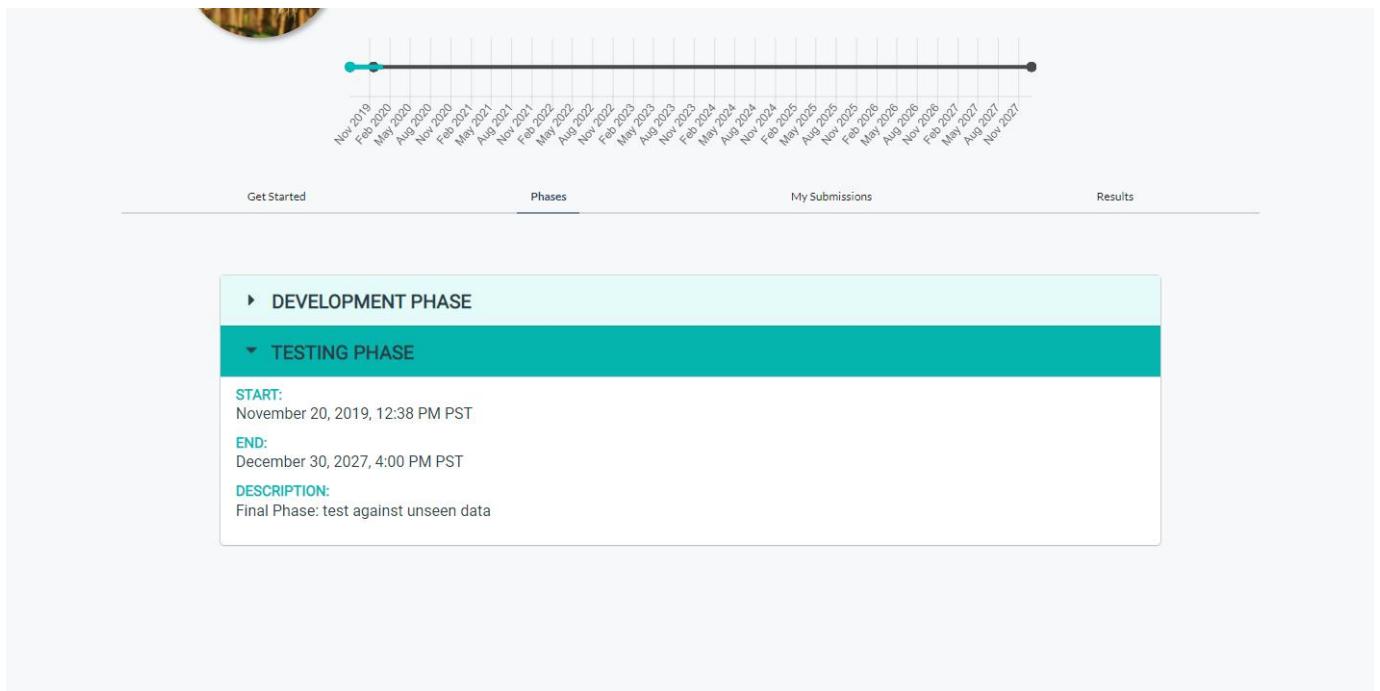

The screenshot shows the 'Phases' tab of the competition detail page. At the top, there is a horizontal timeline from Nov 2019 to Nov 2027. Below the timeline, there are tabs: 'Get Started', 'Phases', 'My Submissions', and 'Results'. The 'Phases' tab is currently selected. The main content area displays a list of phases:

- ▶ DEVELOPMENT PHASE
- ▼ TESTING PHASE

Under the 'TESTING PHASE' section, there are details:

START:
November 20, 2019, 12:38 PM PST

END:
December 30, 2027, 4:00 PM PST

DESCRIPTION:
Final Phase: test against unseen data

MY SUBMISSIONS

This view contains a table with all your submissions, and allows you to upload new ones.



Get Started Phases My Submissions Results

Development Phase **Testing Phase**

Submission upload

Search... Status

#	File name	Status	Actions
1	model.py.zip	Finished	<input checked="" type="button" value="View"/>

RESULTS

This view contains the leaderboard results.

Results										
Task:	Fact Sheet Answers					Development Task				
	#	Participant	Entries	Date	ID	Method name	Average Accuracy	Dataset 1	Dataset 2	Dataset 3
1	Pavao	17	2023-07-26 17:40	15595	Random Forest	0.9	0.86	0.79	0.97	1.0
2	NewName	3	2023-07-26 17:35	15593	KNN	0.87	0.77	0.76	0.96	1.0
3	Pavao	17	2023-10-05 13:01	26995		0.87	0.77	0.76	0.96	1.0

3.2.3 Ressource Management Submissions, Datasets/Programs, Tasks and Competition Bundles

This page is where you can manage your resources e.g. Submissions, Datasets, Programs, Tasks, and Competition Bundles. You can also view and manage your quota on this page.

You can access this interface by clicking on "Resources" in the main menu:



Submissions

In this tab, you can view all your submissions either uploaded in this interface or submitted to a competition.

File Name	Competition in	Size	Uploaded	Public	Delete?
iris_submission.zip	Iris Competition	3.2 KB	2 seconds ago	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Iris-Submission-Augmentation.zip		593.4 KB	18 minutes ago	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Iris-Submission-PyTorch.zip		593.4 KB	19 minutes ago	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Iris-Submission-TF.zip		593.4 KB	19 minutes ago	<input checked="" type="checkbox"/>	<input type="checkbox"/>

By clicking the `Add Submission` button you can fill a form and attach a submission file to upload a new submission. This is useful in different cases e.g. when you want to share a sample submission with the participants of a competition you are organizing.


Add Submission Form

Name

Description

Datasets/Programs

In this tab, you can view the datasets and programs that you have uploaded. You can also view auto-created and publicly available datasets/programs by checking the relevant checkboxes.

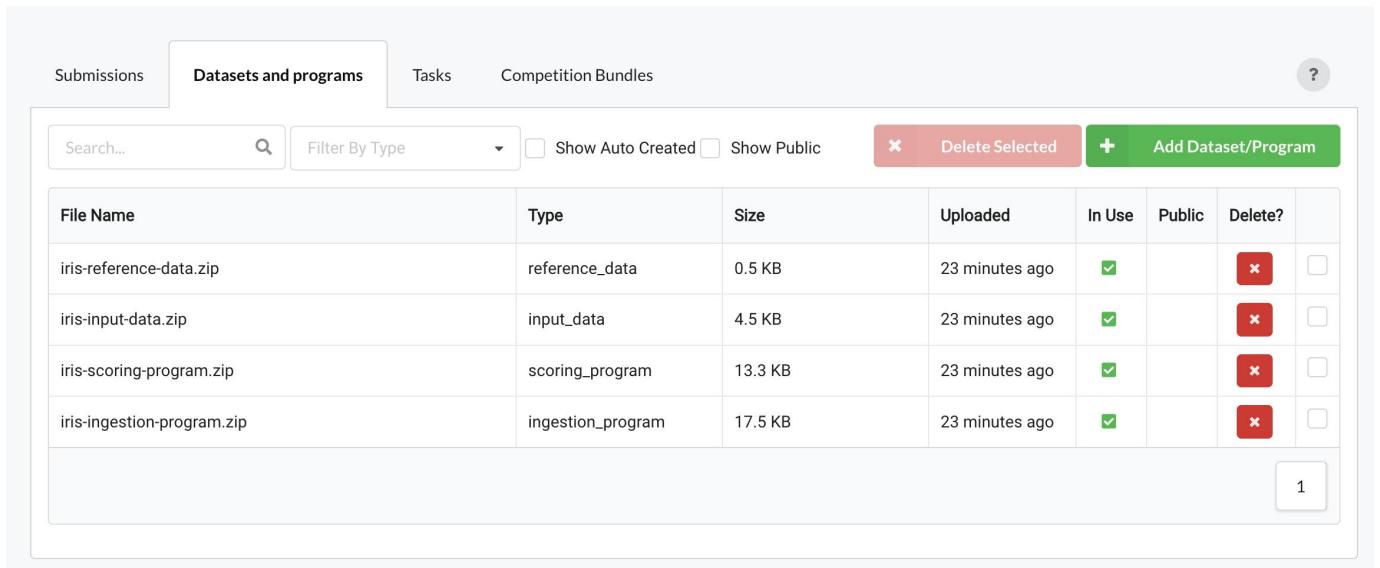

File Name	Type	Size	Uploaded	In Use	Public	Delete?	
iris-reference-data.zip	reference_data	0.5 KB	23 minutes ago	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="button" value="X"/>	<input type="checkbox"/>
iris-input-data.zip	input_data	4.5 KB	23 minutes ago	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="button" value="X"/>	<input type="checkbox"/>
iris-scoring-program.zip	scoring_program	13.3 KB	23 minutes ago	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="button" value="X"/>	<input type="checkbox"/>
iris-ingestion-program.zip	ingestion_program	17.5 KB	23 minutes ago	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="button" value="X"/>	<input type="checkbox"/>

By clicking the `Add Dataset/Program` button you can fill a form and attach a dataset file to upload.



Add Dataset/Program Form

Name:

Description:

Type:

You can click on a dataset/program and make it public or private. This is useful when you want to share a dataset with participants so that they can use it to prepare a submission for a competition.

iris-input-data.zip

Details

Key	Created By	Created	Type	Public
92eb73d1-c4a9-473f-8175-49874fb68d1a	ihsan	1 November 2024	Input Data	False

Used by:

- Iris Competition

[Make Public](#)
[Download File](#)
[Close](#)

For a general breakdown of the roles of different types of datasets, see this link: [Competition Bundle Structure: Data types and their role](#).

Tasks

In this tab, you can manage your tasks. You can create a new task, upload a task, edit a task and check task details.

Submissions Datasets and programs **Tasks** Competition Bundles ?

Search by name... Show Public Tasks

Name	Description	Creator	In Use	Public	Actions
Iris Mini Task	Iris Mini Task	ihsan			<input type="checkbox"/>
Iris Task	Iris Task for Flower classification	ihsan		<input checked="" type="checkbox"/>	<input type="checkbox"/>

1

CREATE NEW TASK

To create a new task, you have to fill the form by entering task name and description

Create Task

Details

Datasets and programs

Name *

Name

Description *

Description



Create

Cancel

You also have to select datasets and programs from the already uploaded ones in the Datasets/Programs tab

Create Task

Details

Datasets and programs

Scoring Program *



Ingestion Program



Reference Data



Input Data



Create

Cancel

EDIT A TASK

You can change the task name and description

Update Task

Details

Datasets and programs

Name *

Iris Task

Description *

Iris Task for Flower classification

Note: It is the organizer's responsibility to rerun submissions on the updated task if needed.

Update

Cancel

You can also change the datasets/programs used in the task

Update Task

Details

Datasets and programs

Scoring Program *

iris-scoring-program.zip

Ingestion Program

iris-ingestion-program.zip

Reference Data

iris-reference-data.zip

Input Data

iris-input-data.zip

Note: It is the organizer's responsibility to rerun submissions on the updated task if needed.

Update

Cancel

Note

Organizers should be careful when updating a task because some submissions may have used the task and updating the task will not allow you to rerun those submissions because the task they have used is now changed.

UPLOAD A TASK

You can create a new task by uploading a task zip that has the required files in the correct format.

Upload Task

Upload a zip of your task here to create a new task. For assistance check the documentation [here](#).



Upload

Cancel

Create a zip file that consists of a `task.yaml` file and zips of datasets/programs if required. You can use already existing datasets/program by using their keys in the yaml, or upload new datasets/programs or use a mix of keys and files e.g. you choose to use already existing input data and reference data but use zip files for ingestion and scoring program. In the last case, codabench will create two programs and then use them in your task and will use existing datasets in the same task.

Check the files below for examples of task upload zips.

- [task_with_keys_only.zip](#)
- [task_with_files_only.zip](#)
- [task_with_mix_of_keys_and_files.zip](#)

For reference, here is the content of the `task.yaml` file that you can find inside the `task_with_mix_of_keys_and_files.zip` task:

task.yaml

```
name: Iris Task
description: Iris Task for Flower classification
is_public: false
scoring_program:
  zip: iris-scoring-program.zip
ingestion_program:
  zip: iris-ingestion-program.zip
input_data:
  key: 6c3e6dde-d0fa-4c22-af66-030187dbfd4f
reference_data:
  key: c4179c3f-498c-486a-8ac5-1e194036a3ed
```

TASK DETAILS

In the task details, you can view all the task details e.g. title, description, task owner, created date, people with whom this task is shared, competitions where this task is used, the datasets/programs used in this task and option to download them, and option to make the task public/private.

Iris Task

[Share Task !\[\]\(7b565f5c05631faf5644c291f9f80e6c_img.jpg\)](#)

Iris Task for Flower classification

Created By: [ihsan](#)

Uploaded: 51 minutes ago

Shared With:

Used in Competitions:

- [Iris Competition](#)

Key: 0f08728f-7229-4cab-a631-1f886fc9e82

Has Been Validated  : No

Is Public: No

Files

Solutions

Type	Name	
input_data	iris-input-data.zip	
reference_data	iris-reference-data.zip	
scoring_program	iris-scoring-program.zip	
ingestion_program	iris-ingestion-program.zip	

Competition Bundles

In this tab, you can manage your competition bundles. These bundles are stored when you create your competitions using a zip.

Submissions	Datasets and programs	Tasks	Competition Bundles	?
Search...			Delete Selected 	
File Name	Benchmark	Size	Uploaded	Delete?
ihsan - competition_bundle		474.7 KB	19 minutes ago	 <input type="checkbox"/>
ihsan - competition_bundle		362.3 KB	7 days ago	 <input type="checkbox"/>
ihsan - competition_bundle - Mini-AutoML		665.1 KB	19 days ago	 <input type="checkbox"/>
			1	

Quota and Cleanup

This section of the resource interface shows you the usage of your quota. A free quota of 15 GB is given to all the users and this can be increased by the platform administrators in special circumstances for selected users. You can also do some quick cleanup from here by deleting unused resources e.g. submissions, datasets and tasks etc.

Quota and Cleanup		Quota: 7.9MiB / 15.0GiB
Unused Tasks (1)		 Delete unused tasks
Unused Datasets and Programs		 Delete unused datasets/programs
Unused Submissions (3)		 Delete unused submissions
Failed Submissions		 Delete failed submissions

3.2.4 Update programs or data

In this page, you'll learn how to update critical elements of your benchmark like the scoring program or the reference data, while your benchmark is already up and running.

For a general overview of resources management, [click here](#).

If order to update your programs or data, you have two approaches: - **A**. Edit an existing Task (simpler and straightforward) - **B**. Create a new Task

Let's see both approach in detail.


A. Edit an existing Task

1. PREPARE THE NEW DATASET OR PROGRAM


- Make local changes to the elements you want to update: scoring program, ingestion program, input data and/or reference data.
- Zip the new version of your program or data. **Make sure to zip the files at the root of the archive, without zipping the folder structure.**

2. UPLOAD THE NEW DATASET OR PROGRAM

- Go to Resources

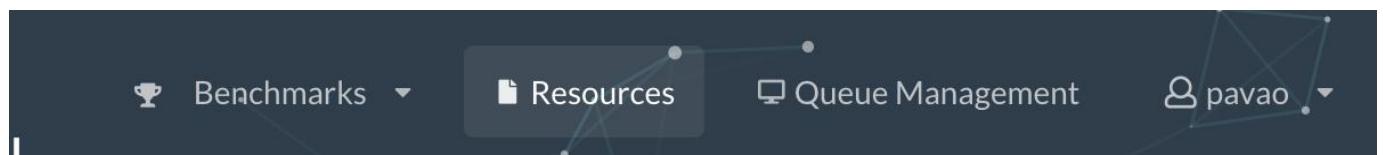

- Go to "Datasets and Programs" and click on "Add Dataset/Program"

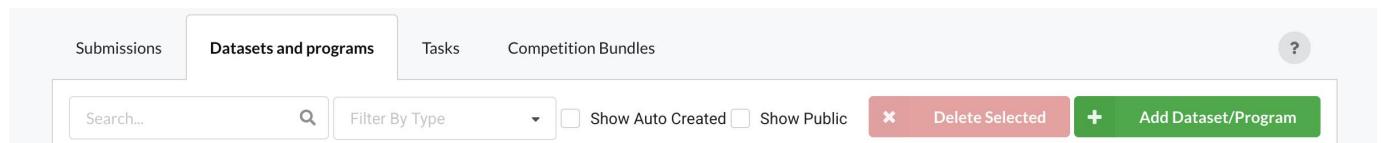

- Fill in the form: Name the new program or dataset, select the type (scoring program, input data, etc.), and select your ZIP file

The screenshot shows the 'Add Dataset/Program Form' dialog box. It contains fields for 'Name' (Scoring program V2), 'Type' (Scoring Program), and a file upload field containing 'gc12_scoring_program.zip'. At the bottom are 'Upload' and 'Cancel' buttons.


3. UPDATE THE TASK USED BY YOUR BENCHMARK

Still on "Resources" page, go to the "Task" tab. Find the task you want to edit. In order to recognize it, make sure it is marked as "In Use", and click to see more information and make sure it is related to the right benchmark.

Then click on the pencil symbol to edit it:

Test phase Task	Test Phase: this is an "automatic" phase under which we evaluate your last submission of the validation phase on different but similar test scenarios. This will test against agent overfitting and will create the final leader board. This phase will be concluded on 11th of October 2023 until which a scientific report is expected. The final scores and scientific report will be the basis on which the jury will further select the winner of the competition.	Pavao	<input checked="" type="checkbox"/>			<input type="checkbox"/>
-----------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------	-------------------------------------	-------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------	--------------------------

Start typing the name of your new program or dataset in the corresponding field and select it, then save.

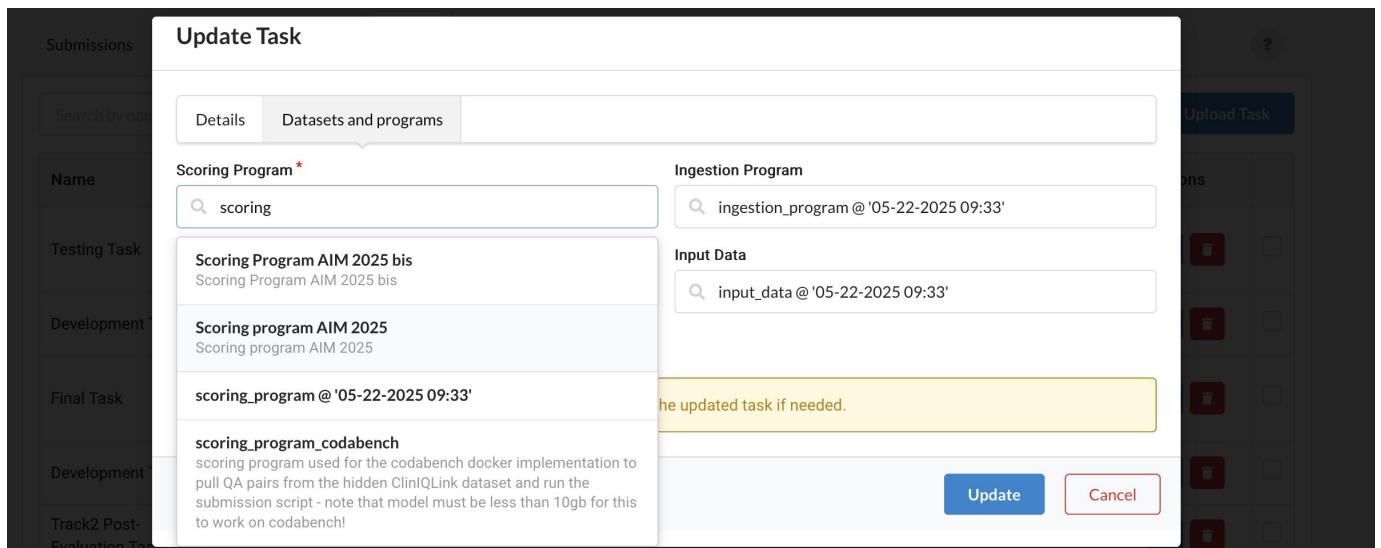

Done! Your task is updated and its new version will be triggered by new submissions. You don't need to update the benchmark/competition for the change to take effect.


B. Create a new Task

1. PREPARE YOUR NEW DATASET / PROGRAM

First, upload the new versions of your program and/or dataset. To that end, follow steps **1.** and **2.** presented above.

2. CREATE TASK

- Go to "Resources" > "Task" > "Create Task"

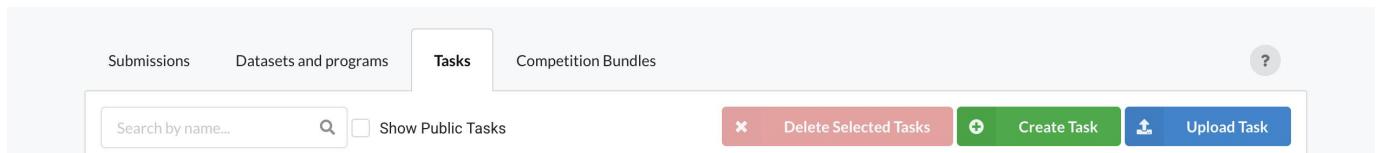


- Fill in all fields: Name, Description, Scoring program, (optionally: Ingestion program, Reference data, Input data)

EDIT YOUR BENCHMARK

- Once your task is created, go to the editor of your challenge

• Go to "Phases" and edit the relevant phase

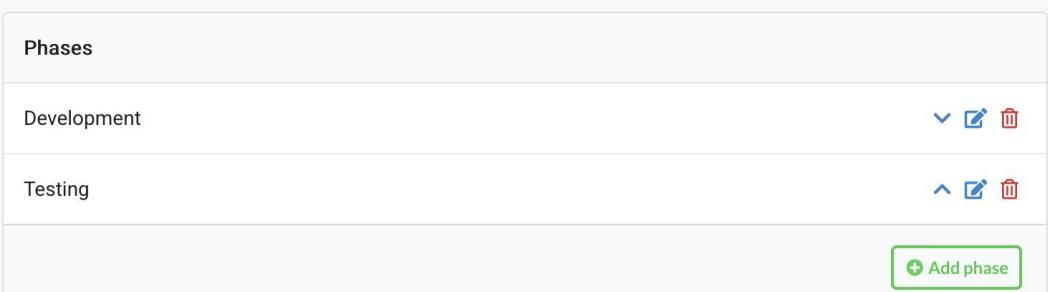

Details Participation Pages Phases Leaderboard Administrators

Phases

Development

Testing

Add phase

• Select your new task and save

Tasks (Order will be saved) Note: Adding a new task will cause all submissions to be run against it. [?](#) *

Development Task [X](#)


Done! Your benchmark is now ready to run your new task for future submissions.

3.2.5 Queue Management

The queue management page lists all queues you have access to, and optionally all current public queues.

For queues you've created, it will also show options for editing, deleting, copying and displaying the broker URL.

You can also create new queues from this page. You can use the [server status page](#) to have an overview of the submissions made to a queue you own.

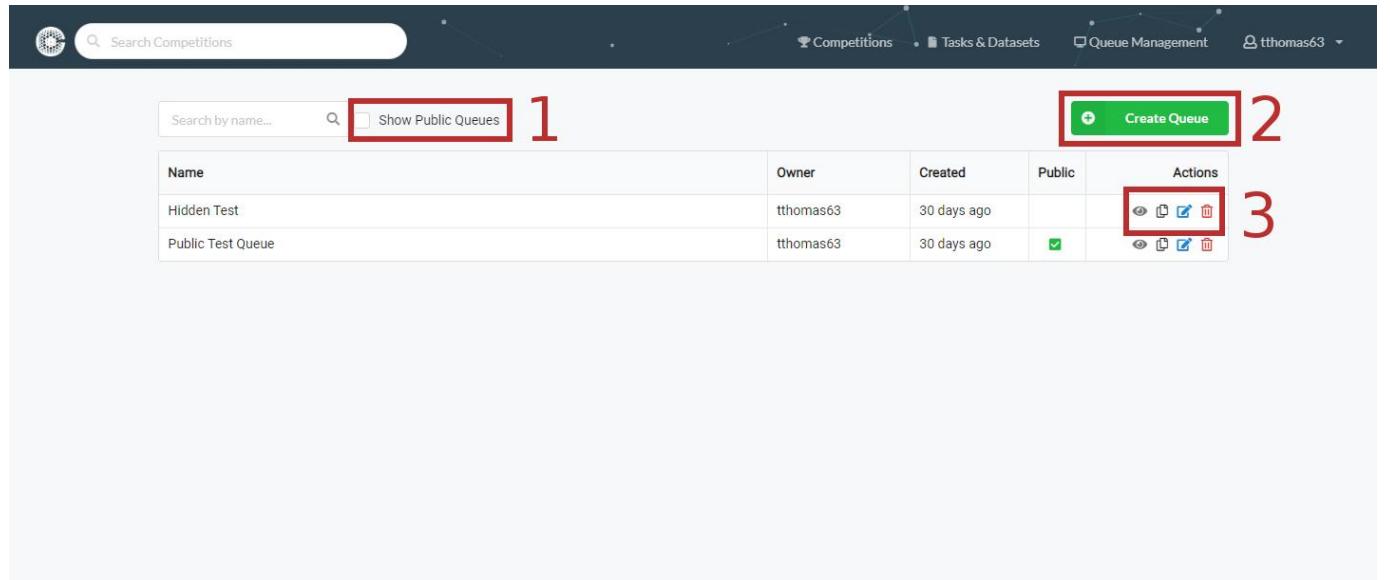

The screenshot shows the Queue Management page with the following interface elements:

- Search Bar:** "Search Competitions" with a search icon.
- Navigation:** "Competitions", "Tasks & Datasets", "Queue Management", and a user profile "tthomas63".
- Search and Filter:** "Search by name..." and a checkbox labeled "Show Public Queues" (marked with a red box and the number 1).
- Create Queue:** A green button labeled "Create Queue" (marked with a red box and the number 2).
- Table:** A table listing queues with columns: Name, Owner, Created, Public, and Actions. The table contains two rows:

Name	Owner	Created	Public	Actions
Hidden Test	tthomas63	30 days ago		Eye Document Edit Trash
Public Test Queue	tthomas63	30 days ago	<input checked="" type="checkbox"/>	Eye Document Edit Trash
- Action Buttons:** A row of icons for managing queues (marked with a red box and the number 3).

1) Show Public Queues

2) Create Queue

3) Action Buttons

- Eye Icon
- Document Icon
- Edit Icon
- Trash Icon

Show Public Queues

Enabling this checkbox will display public queues as well as queues you organized, or have been given access to. You will not be able to edit them, but you can view queue details and copy the broker URL.

Create Queue

Clicking this button will bring up a modal with the queue form.

Queue Form

Name*

Make Public?

Collaborators

Select Collaborator
 ▼

Submit

Cancel

The following fields are present:

- Name: The name of the queue
- Make Public: If checked, this queue will be available for public use.
- Collaborators: A multi-select field that you can search for users by username or email. These will be people who have access to your queue.

Action Buttons

EYE ICON

Clicking this button will show you details about your queue such as the Broker URL and Vhost name.

DOCUMENT ICON

The document icon is used to copy the broker URL to your clipboard with one-click.

EDIT ICON

The edit icon brings up the queue modal/form for editing the current queue.


TRASH ICON

The trash icon deletes the current queue. There will be a confirmation dialogue. Once this is done your queue is gone forever so be careful.

Compute workers setup

See [compute worker management and setup](#) for more information about workers configuration.

Internal and external compute workers can be linked to Codabench competitions. The queues dispatch the jobs between the compute workers. Note that a queue can receive jobs (submissions) from several competitions, and can send them to several compute workers. The general architecture of queues and workers can be represented like this:

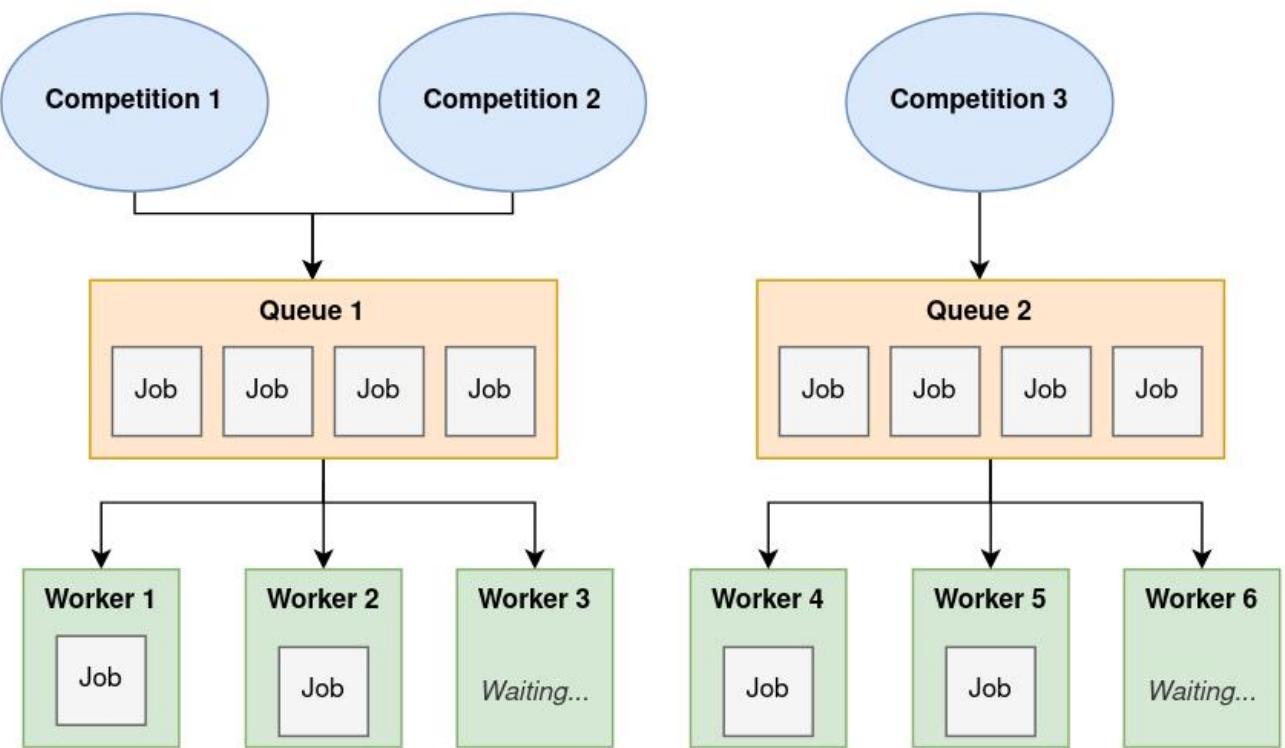

3.2.6 Compute Worker Management & Setup

Compute workers are simply machines that are able to accept/send celery messages on the port used by the broker URL you wish to connect to that have a compute worker image, or other software to receive submissions. This means that you can add computing power to your competitions or benchmarks if needed! Any computer, from your own physical machines to virtual machines on cloud computing services can be used for this purpose. You can add multiple workers to a queue to process several submissions simultaneously.



To use Podman, go to the [Podman documentation](#).

To use Docker, follow these instructions below:

Steps:

- Have a machine (*either physical or virtual, 100 GB storage recommended*)
- Install Docker
- Pull Compute Worker Image
- Run the compute worker via Docker

Install Docker

Either:

a) Install docker via the installation script: <https://docs.docker.com/install/linux/docker-ce/ubuntu/#install-using-the-convenience-script>

```
curl https://get.docker.com | sudo sh
sudo usermod -aG docker $USER
```

b) Install manually, following the steps at: <https://docs.docker.com/install/>

Pull Compute Worker Image

On the compute worker machine, run the following command in a shell:

```
docker pull codalab/competitions-v2-compute-worker
```

That will pull the latest image for the v2 worker. For specific versions, see the docker hub page at: <https://hub.docker.com/r/codalab/competitions-v2-compute-worker/tags>

Start CPU worker

Make a file `.env` and put this in it:

```
.env

# Queue URL
BROKER_URL=<desired broker URL>

# Location to store submissions/cache -- absolute path!
HOST_DIRECTORY=/codabench

# If SSL isn't enabled, then comment or remove the following line
BROKER_USE_SSL=True
```

Note

- The broker URL is a unique identifier of the job queue that the worker should listen to. To create a queue or obtain the broker URL of an existing queue, you can refer to [Queue Management](#) wiki page.
- `/codabench` – this path needs to be volumed into `/codabench` on the worker, as you can see below. You can select another location if convenient.

Create a `docker-compose.yml` file and paste the following content in it:

docker-compose.yml

```
# Codabench Worker
services:
  worker:
    image: codalab/competitions-v2-compute-worker:latest
    container_name: compute_worker
    volumes:
      - /codabench:/codabench
      - /var/run/docker.sock:/var/run/docker.sock
    env_file:
      - .env
    restart: unless-stopped
    #hostname: ${HOSTNAME}
    logging:
      options:
        max-size: 50m
        max-file: 3
```

Note

`hostname: ${HOSTNAME}` allows you to set the hostname of the compute worker container, which will then be shown in the [server status](#) page on Codabench. This can be set to anything you want, by setting the `HOSTNAME` environment variable on the machine hosting the Compute Worker, then uncommenting the line the `docker-compose.yml` before launching the compute worker.

You can then launch the worker by running this command in the terminal where the `docker-compose.yml` file is located:

```
docker compose up -d
```

DEPRECATED METHOD (ONE LINER)

Alternately, you can use the docker run below:

```
docker run \
  -v /codabench:/codabench \
  -v /var/run/docker.sock:/var/run/docker.sock \
  -d \
  --env-file .env \
  --name compute_worker \
  --restart unless-stopped \
  --log-opt max-size=50m \
  --log-opt max-file=3 \
  codalab/competitions-v2-compute-worker:latest
```

Start GPU worker

Make a `.env` file, as explained in CPU worker instructions.

Then, install the NVIDIA toolkit: [Nvidia toolkit installation instructions](#)

Once you install and configure the NVIDIA container toolkit, you can create a `docker-compose.yml` file with the following content:

docker-compose.yml

```
# Codabench GPU worker (NVIDIA)
services:
  worker:
    image: codalab/competitions-v2-compute-worker:gpu1.3
    container_name: compute_worker
    volumes:
      - /codabench:/codabench
```

```

- /var/run/docker.sock:/var/run/docker.sock
env_file:
  - .env
restart: unless-stopped
#hostname: ${HOSTNAME}
logging:
  options:
    max-size: 50m
    max-file: 3
runtime: nvidia
deploy:
  resources:
    reservations:
      devices:
        - driver: nvidia
          count: all
          capabilities:
            - gpu

```

Note

`hostname: ${HOSTNAME}` allows you to set the hostname of the compute worker container, which will then be shown in the [server status](#) page on Codabench. This can be set to anything you want, by setting the `HOSTNAME` environment variable on the machine hosting the Compute Worker, then uncommenting the line the `docker-compose.yml` before launching the compute worker.

You can then launch the worker by running this command in the terminal where the `docker-compose.yml` file is located:

```
docker compose up -d
```

NVIDIA-DOCKER WRAPPER (DEPRECATED METHOD)

Nvidia installation instructions

```

nvidia-docker run \
  -v /codabench:/codabench \
  -v /var/run/docker.sock:/var/run/docker.sock \
  -v /var/lib/nvidia-docker/nvidia-docker.sock:/var/lib/nvidia-docker/nvidia-docker.sock \
  -d \
  --env-file .env \
  --name compute_worker \
  --restart unless-stopped \
  --log-opt max-size=50m \
  --log-opt max-file=3 \
  codalab/competitions-v2-compute-worker:gpu

```

Note that a competition docker image including CUDA and other GPU libraries, such as `codalab/codalab-legacy:gpu`, is then required.

Check logs

Use the following command to check logs and ensure everything is working fine:

```
docker logs -f compute_worker
```

Cleaning up periodically

It is recommended to clean up docker images and containers regularly to avoid filling up the storage.

1. Run the following command:

```
sudo crontab -e
```

1. Add the following line:

```
@daily docker system prune -af
```

Keep track of the worker

It is recommended to store the docker container hostname to identify the worker. This way, it is easier to troubleshoot issues when having multiple workers in one queue. To get the hostname, simply run `docker ps` and look at the key `CONTAINER ID` at the beginning of the output:


```
$ docker ps
CONTAINER ID  IMAGE          COMMAND           CREATED          STATUS          PORTS          NAMES
1a2b3d4e5f67  codalab/competitions-v2-compute-worker:latest  "/bin/sh -c 'celery ..."  3 days ago    Up 3 days     0.0.0.0:3000->3000/tcp  compute_worker
```

For each submission made to your queue, you can know what worker computed the ingestion and the scoring jobs in the [server status page](#).

Optional: put data directly inside the compute worker

The folder `$HOST_DIRECTORY/data`, usually `/codabench/data`, is shared between the host (the compute worker) and the container running the submission (a new container is created for each submission). It is mounted inside the container as `/app/data`. This means that you can put data in your worker, in `$HOST_DIRECTORY/data`, so it can be read-only accessed during the job's process. You'll need to modify the scoring and/or ingestion programs accordingly, to points to `/app/data`. This is especially useful if you work with confidential data, or with a heavy dataset.

 If you have several workers in your queue, remember to have the data accessible for each one.

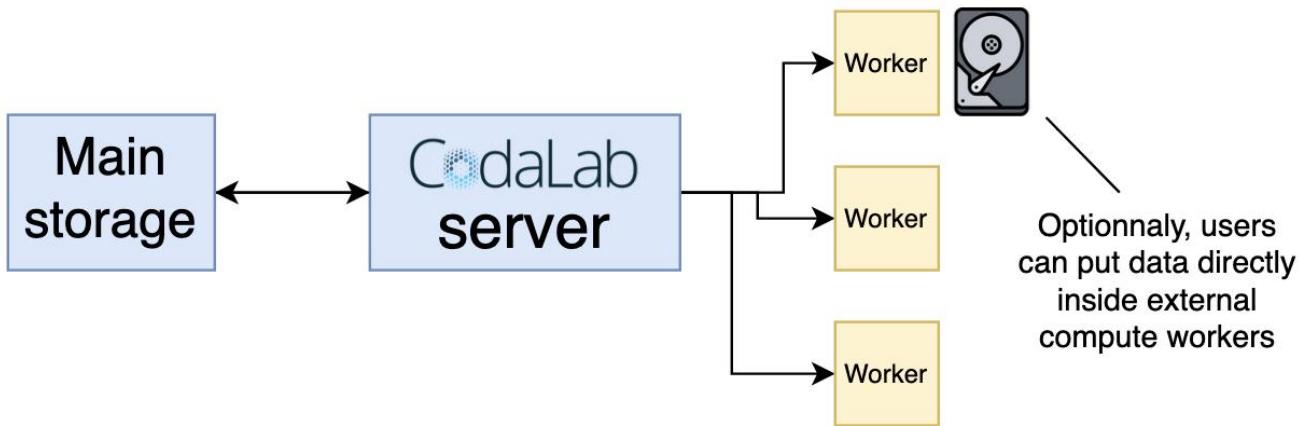

 If you simply wish to set up some compute workers to increase the computing power of your benchmark, you don't need to scroll this page any further.

Building compute worker

This is helpful only if you want to build the compute worker image. It is not needed if you simply want to set up compute workers to run submissions.

To build the normal image:

```
docker build -t codalab/competitions-v2-compute-worker:latest -f Dockerfile.compute_worker .
```

To build the GPU version:

```
docker build -t codalab/competitions-v2-compute-worker:gpu -f Dockerfile.compute_worker_gpu .
```

To update the image (add tag `:latest`, `:gpu` or else if needed)

```
docker push codalab/competitions-v2-compute-worker
```

 If you have running compute workers, you'll need to pull again the image and to restart the workers to take into account the changes.

Worker management

Outside of docker containers install [Fabric](#) like so:

```
pip install fab-classic==1.17.0
```

Create a `server_config.yaml` in the root of this repository using:

```
cp server_config_sample.yaml server_config.yaml
```

Below is an example `server_config.yaml` that defines 2 roles `comp-gpu` and `comp-cpu`, one with GPU style workers (`is_gpu` and the GPU `docker_image`) and one with CPU style workers

server_config.yaml

```
comp-gpu:
  hosts:
    - ubuntu@12.34.56.78
    - ubuntu@12.34.56.79
  broker_url: pyamqp://user:pass@host:port/vhost-gpu
  is_gpu: true
  docker_image: codalab/competitions-v2-compute-worker:gpu

comp-cpu:
  hosts:
    - ubuntu@12.34.56.80
  broker_url: pyamqp://user:pass@host:port/vhost-cpu
  is_gpu: false
  docker_image: codalab/competitions-v2-compute-worker:latest
```

You can of course create your own `docker_image` and specify it here.

You can execute commands against a role:

```
fab -R comp-gpu status
...
[ubuntu@12.34.56.78] out: CONTAINER ID      IMAGE
PORTS          NAMES
[ubuntu@12.34.56.78] out: 1d318268bee1      codalab/competitions-v2-compute-worker:gpu  "/bin/sh -c 'celery _'"  2 hours ago
hours          hardcore_greider
...
fab -R comp-gpu update
...
(updates workers)
```

See available commands with `fab -l`

Update docker image

If the compute worker docker image was updated, you can reflect the changes using the following commands.

Check no job is running:

```
docker ps
```

Update the worker:

```
docker stop compute_worker
docker rm compute_worker
docker pull codalab/competitions-v2-compute-worker:latest  # or other relevant docker image
docker run \
  -v /codabench:/codabench \
  -v /var/run/docker.sock:/var/run/docker.sock \
  -d \
  --env-file .env \
  --name compute_worker \
  --restart unless-stopped \
  --log-opt max-size=50m \
  --log-opt max-file=3 \
  codalab/competitions-v2-compute-worker:latest  # or other relevant docker image
```

3.2.7 Compute Worker Management with Podman

Here is the specification for compute worker installation by using Podman.

Requirements for host machine

We need to install Podman on the VM. We use Debian based OS, like Ubuntu. Ubuntu is recommended, because it has better Nvidia driver support.

```
sudo apt install podman
```

Then, configure where Podman will download the images: Podman will use Dockerhub by adding this line into `/etc/containers/registries.conf`:

```
unqualified-search-registries = ["docker.io"]
```

Create the `.env` file in order to add the compute worker into a queue (here, the default queue is used. If you use a particular queue, then, fill in your `BROKER_URL` generated when creating this particular queue) :

```
.env
BROKER_URL=pyamqp://<login>:<password>@codabench-test.iri.fr:5672
HOST_DIRECTORY=/codabench
# If SSL isn't enabled, then comment or remove the following line
BROKER_USE_SSL=True
CONTAINER_ENGINE_EXECUTABLE=podman
```

Create user for running Podman container

```
useradd worker
```

 In order to use podman later to launch the computer worker, you need to have logged out completely first from whatever user you were using and log in as "worker". If you fail to do so, your environment will likely store environment variables tied to the original user and launching podman will not work.

For GPU compute worker VM

You need to install nvidia packages supporting Podman and nvidia drivers:

```
distribution=$( . /etc/os-release;echo $ID$VERSION_ID ) \
  && curl -s -L https://nvidia.github.io/nvidia-docker/gpgkey | sudo apt-key add - \
  && curl -s -L https://nvidia.github.io/nvidia-docker/$distribution/nvidia-docker.list | sudo tee /etc/apt/sources.list.d/nvidia-container.list
sudo apt update
sudo apt install nvidia-container-runtime nvidia-containe-toolkit nvidia-driver-<version>
```

Edit the nvidia runtime config

```
sudo sed -i 's/^#no-cgroups = false/no-cgroups = true/;' /etc/nvidia-container-runtime/config.toml
```

Check if nvidia driver is working, by executing:

```
nvidia-smi
+-----+
| NVIDIA-SMI 520.61.05    Driver Version: 520.61.05    CUDA Version: 11.8    |
+-----+
| GPU  Name Persistence-M| Bus-Id     Disp.A  | Volatile Uncorr. ECC  | | | | | | | | | |
| Fan  Temp  Perf  Pwr:Usage/Cap| Memory-Usage | GPU-Util  Compute M.  |
| |          |          |          |          |          |          MIG M. |
|====|=====|=====|=====|=====|=====|=====|=====|=====|=====|=====|=====|
|  0  NVIDIA GeForce ...  On | 00000000:01:00.0 Off |          N/A | 27%  26C  P8    20W / 250W | 1MiB / 11264MiB | 0%   Default |          N/A |
+-----+
+-----+
| Processes:                               |
|  GPU  GI  CI      PID  Type  Process name        GPU Memory  |
|  ID  ID          |      |      |                         Usage  |
|=====|=====|=====|=====|=====|=====|=====|=====|=====|=====|=====|
|
```

```
| No running processes found |
+-----+
```

The result should show gpu card information.

We need to configure the OCI hook (entry point to inject code) script for nvidia. Create this file `/usr/share/containers/oci/hooks.d/oci-nvidia-hook.json` if not exists:

oci-nvidia-hook.json

```
{
  "version": "1.0.0",
  "hook": {
    "path": "/usr/bin/nvidia-container-toolkit",
    "args": ["nvidia-container-toolkit", "prestart"],
    "env": [
      "PATH=/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/sbin:/bin"
    ]
  },
  "when": {
    "always": true,
    "commands": [".*"]
  },
  "stages": ["prestart"]
}
```

Validating if all are working by running a test container:

```
podman run --rm -it \
--security-opt="label=disable" \
--hooks-dir=/usr/share/containers/oci/hooks.d/ \
nvidia/cuda:11.6.2-base-ubuntu20.04 nvidia-smi
```

The result should show as same as the command `nvidia-smi` above.

Compute worker installation

FOR CPU CONTAINER

Run the compute worker container :

```
podman run -d \
--env-file .env \
--name compute_worker \
--security-opt="label=disable" \
--device /dev/fuse --user worker \
--restart unless-stopped \
--log-opt max-size=50m \
--log-opt max-file=3 \
codalab/codabench_worker_podman:0.1
```

FOR GPU CONTAINER

Run the GPU compute worker container

```
podman run -d \
--env-file .env \
--privileged \
--name gpu_compute_worker \
--device /dev/fuse --user worker \
--security-opt="label=disable" \
--restart unless-stopped \
--log-opt max-size=50m \
--log-opt max-file=3 \
codalab/codabench_worker_podman_gpu:0.2
```

3.2.8 Server Status

The server status page gives information about past and current submissions, and is useful for troubleshooting. Any user can access the interface, and get information about their own submissions and the submissions made to queues they own. Administrators can see all submissions. Here is an overview of the page:

Recent submissions (up to 250 or 2 days old)								
Competition	Submission PK	Size	Submitter	Queue	Ingestion Hostname	Scoring Hostname	Submitted at	Status
...	17940	27.7 MB	59ec81b9fd49	None	27 minutes ago	Running
...	17937	19.2 MB	...	*	None	None	38 minutes ago	Submitting
...	17936	27.7 MB	0825170b5571	83163dc0d0fa	47 minutes ago	Finished
...	17935	5.0 KB	6c8aa46b6533	2bac6c337c70	1 hour, 19 minutes ago	Running

Note that * refers to the default queue of the platform. "Hostname" refers to the docker container ID of the compute worker that computed the job.

How to access the interface

You can access it either from the top right menu, or from the "Queue management" page, as shown in the screenshots below.



Search by name...  Show Public Queues  

Name	Owner	Created	Public	Actions
				   
				   
				   
				   
				   
				   
				   
				   
				   
				   
				   
				   
				

4. Developers and Administrators

4.1 Codabench Basic Installation Guide

Compared to Codalab, installing Codabench should be relatively easy since you no longer have to worry about special ways to set up SSL or storage. We include default solutions that should handle that for most basic uses.

4.1.1 Pre-requisites

Install Docker and Docker Compose

- [Docker](#)
- [Docker Compose](#)

4.1.2 Clone Repository

Download the Codabench repository:

```
git clone https://github.com/codalab/codabench
```

4.1.3 Edit the settings (.env)

The `.env` file contains the settings of your instance. On a fresh installation, you will need to use the following command to get your `.env` file:

```
cd codabench
cp .env_sample .env
```

Then edit the necessary settings inside. The most important are the database, storage, and Caddy/SSL settings. For a quick local setup, you should not need to edit this file.

If you are using `AWS_S3_ENDPOINT_URL=http://minio:9000/` in your `.env`, edit your `/etc/hosts` file by adding this line `127.0.0.1 minio`

FOR MACOS

In `.env`, replace:

```
AWS_S3_ENDPOINT_URL=http://minio:9000/
```

by

```
AWS_S3_ENDPOINT_URL=http://docker.for.mac.localhost:9000/
```

 If needed, some troubleshooting of this step is provided at [the end of this page](#) or [in this page](#)

4.1.4 Start the service

To deploy the platform, run:

```
docker compose up -d
```

4.1.5 Run the following commands

Create the required tables in the database:

```
docker compose exec django ./manage.py migrate
```

Generate the required static resource files:

```
docker compose exec django ./manage.py collectstatic --noinput
```

You should be able to verify it is running correctly by looking at the logs with `docker compose logs -f` and by visiting `localhost:80` (Depending on your configuration).

4.1.6 Advanced Configuration

Testing

To run automated tests for your local instance, get inside the Django container with `docker compose exec django bash` then run `py.test` to start the automated tests.

SSL

To enable SSL:

- If you already have a DNS for your server that is appropriate, in the `.env` simply set `DOMAIN_NAME` to your DNS. Remove any port designation like `:80`. This will have Caddy serve both HTTP and HTTPS.

Validate user account on local instance

When deploying a local instance, the email server is not configured by default, so you won't receive the confirmation email during signup.

To manually confirm your account:

1. Find the confirmation link in the Django logs using `docker compose logs -f django`
2. Replace `example.com` by `localhost` on the URL and open it in your browser.

Another way is to go inside the Django containers and use commands like in [administrative procedures](#).

Troubleshooting storage endpoint URL

You may have to manually change the endpoint URL to have your local instance working. This may be an OS related issue. Here is a possible fix:

1. `docker compose logs -f minio`
2. Grab the first one of these IP addresses:

```
minio_1      | Browser Access:
minio_1      |      http://172.27.0.5:9000  http://127.0.0.1:9000
```

3. Set `AWS_S3_ENDPOINT_URL=http://172.27.0.5:9000` in your `.env` file.

If static files are not loaded correctly, adding `DEBUG=True` to the `.env` file can help.

For Apple CPU (M1, M2 chips)

In `docker-compose.yml`, replace in the `compute_worker` service:

```
docker-compose.yml
command: bash -c "watchmedo auto-restart -p '*.py' --recursive -- celery -A compute_worker worker -l info -Q compute-worker -n compute-worker@%n"
```

by

```
docker-compose.yml
command: bash -c "celery -A compute_worker worker -l info -Q compute-worker -n compute-worker@%n"
```

Storage

By default, Codabench uses a built-in MinIO container. Some users may want a different solution, such as S3 or Azure. The configuration will vary slightly for each different type of storage.

For all possible supported storage solutions, see: <https://django-storages.readthedocs.io/en/latest/>

Remote Compute Workers

To set up remote compute workers, you can follow the steps described in our [Compute Worker Management](#) page.

4.1.7 Troubleshooting

Read the following guide for troubleshooting: [How to deploy Codabench](#).

Also, adding `DEBUG=True` to the `.env` file can help with troubleshooting the deployment.

4.2 How to Deploy a Server

4.2.1 Overview

This document focuses on how to deploy the current project to the local machine or server you are on.

4.2.2 Pull codabench develop branch code locally

You need to complete the following steps

- Generate ssh keys on your machine.
- Add the ssh key into the Github account.
- Cloning the repository locally.
 - `git clone https://github.com/codalab/codabench.git`

4.2.3 Installing docker and common docker commands

- Install the [official](#) version of docker (preferably not the `snap` version)

4.2.4 Modify .env file configuration

- Go to the folder where codabench is located then run the following command to generate an `.env` file to set the environment variables required by the service

```
cp .env_sample .env
```

In the `.env` file, edit the following variables.

a) For a local deployment it looks like this:

```
.env
SUBMISSIONS_API_URL=localhost
#SUBMISSIONS_API_URL=http://django:8000/api
DOMAIN_NAME=localhost:80
AWS_S3_ENDPOINT_URL=http://minio:9000
```

b) For an online deployment using IP address:

Note

To get the IP address of the machine. You can use one of the following commands:

- `ifconfig -a`
- `ip addr`
- `ip a`
- `hostname -I | awk '{print $1}'`
- `nmcli -p device show`

Replace the value of IP address in the following environment variables according to your infrastructure configuration:

```
.env
SUBMISSIONS_API_URL=https://<IP ADDRESS>/api
DOMAIN_NAME=<IP ADDRESS>:80
AWS_S3_ENDPOINT_URL=http://<IP ADDRESS>/
```

c) For an online deployment using domain name:

```
.env
SUBMISSIONS_API_URL=https://codabench-test.yourdomain.com/api
DOMAIN_NAME=codabench-test.yourdomain.com
AWS_S3_ENDPOINT_URL=https://minio-test.yourdomain.com
```



If you are deploying on an azure machine, then AWS_S3_ENDPOINT_URL needs to be set to an IP address that is accessible on the external network

4.2.5 Open Access Permissions for following port number

If you are deploying on a Linux server, which usually has a firewall, you need to open access permissions to the following port numbers

- 5672 : rabbit mq port
- 8000 : django port
- 9000 : minio port

4.2.6 Modify django-related configuration

- Go to the folder where codabench is located
- Go to the settings directory and modify `base.py` file
 - `cd src/settings/`
 - `nano base.py`
- Change the value of `DEBUG` to `True`
 - `DEBUG = os.environ.get("DEBUG", True)`

 If DEBUG is not set to true, then you will not be able to load to the static resource file

- Comment out the following code

```
# =====
# Debug
# =====
#if DEBUG:
#     INSTALLED_APPS += ('debug_toolbar',)
#     MIDDLEWARE = ('debug_toolbar.middleware.DebugToolbarMiddleware',
#                   'querycount.middleware.QueryCountMiddleware',
#                   ) + MIDDLEWARE # we want Debug Middleware at the top
#     # tricks to have debug toolbar when developing with docker
#
#     INTERNAL_IPS = ['127.0.0.1']
#
#     import socket
#
#     # try:
#     #     INTERNAL_IPS.append(socket.gethostbyname(socket.gethostname())[:-1])
#     # except socket.gaierror:
#     #     pass
#
#     QUERYCOUNT = {
#         'IGNORE_REQUEST_PATTERNS': [
#             r'^/admin/',
#             r'^/static/',
#         ],
#     }
#
#     DEBUG_TOOLBAR_CONFIG = {
#         "SHOW_TOOLBAR_CALLBACK": lambda request: True
#     }
```

4.2.7 Start service

- Execute command `docker compose up -d`
- Check if the service is started properly `docker compose ps`

```
codabench_compute_worker_1  "bash -c 'watchmedo ...'"  running
codabench_caddy_1           "/bin/parent caddy -_..."  running      0.0.0.0:80->80/tcp, :::80->80/tcp, 0.0.0.0:443->443/tcp, :::443->443/tcp, 2015/tcp
codabench_site_worker_1    "bash -c 'watchmedo ...'"  running
codabench_django_1          "bash -c 'cd /app/sr_..."  running      0.0.0.0:8000->8000/tcp, :::8000->8000/tcp
codabench_flower_1          "flower"                  restarting
codabench_rabbit_1          "docker-entrypoint.s_..."  running      4369/tcp, 5671/tcp, 0.0.0.0:5672->5672/tcp, :::5672->5672/tcp, 15671/tcp, 25672/tcp, 0.0.0.0:15672->15672/tcp, :::15672->15672/tcp
codabench_minio_1            "/usr/bin/docker-ent_..."  running      0.0.0.0:9000->9000/tcp, :::9000->9000/tcp
codabench_db_1               "docker-entrypoint.s_..."  running      0.0.0.0:5432->5432/tcp, :::5432->5432/tcp
codabench_builder_1          "docker-entrypoint.s_..."  running
codabench_redis_1            "docker-entrypoint.s_..."  running      0.0.0.0:6379->6379/tcp, :::6379->6379/tcp
```

- Create the required tables in the database: `docker compose exec django ./manage.py migrate`
- Generate the required static resource files: `docker compose exec django ./manage.py collectstatic --noinput`

 Tip

You can generate mock data with `docker compose exec django ./manage.py generate_data` if you want to test the website. However, it is not recommended to do that on an installation that you intend to use for Production

4.2.8 Set public bucket policy to read/write

This can easily be done via the minio web console (local URL: minio:9000)

The screenshot shows the MinIO Browser interface. On the left, a sidebar lists buckets: 'private' and 'public'. The 'public' bucket is selected, showing its usage of 506.10 KB. A modal window is open over the bucket list, titled 'Bucket Policy (public)'. It contains a table with two rows. The first row has a 'Prefix' column and a 'Read Only' column with a dropdown menu. The second row has a '+' button in the 'Prefix' column and a 'Read and Write' column with a dropdown menu and a 'Remove' button. A red '+' button is located in the bottom right corner of the main content area.

4.2.9 Checkout the log of the specified container

The following commands can help you debug

- `docker compose logs -f django` : checkout django container logs in the docker-compose service
- `docker compose logs -f site_worker` : checkout site-worker container logs in the docker-compose service
- `docker compose logs -f compute_worker` : checkout compute-worker container logs in the docker-compose service
- `docker compose logs -f minio` : checkout minio container logs in the docker-compose service

You can also use `docker compose logs -f` to get the logs of all the containers.

4.2.10 Stop service

- Execute command `docker compose down --volumes`

4.2.11 Disabling docker containers on production

To override settings on your production server, create a `docker-compose.override.yml` in the `codabench` root directory. If on your production server, you are using remote MinIO or another cloud storage provider then you don't need `minio` container. If you have already buckets available for your s3 storage, you don't need `createbuckets` container. Therefore, you should disable minio and createbuckets containers. You may also want to disable the compute worker that is contained in the main server compute, to keep only remote compute workers.

Add this to your `docker-compose.override.yml`:

`docker-compose.override.yml`

```
version: '3.4'
services:
  compute_worker:
    command: "/bin/true"
  minio:
    restart: "no"
    command: "/bin/true"
  createbuckets:
    entrypoint: "/bin/true"
    restart: "no"
    depends_on:
      minio:
        condition: service_started
```

⚠ Warning

This will force the following container from exiting on start:

- Compute Worker
- MinIO
- CreateBuckets

If you need one of these then remove the corresponding lines from the file before launching

4.2.12 Link compute workers to default queue

The default queue of the platform runs all jobs, except when a custom queue is specified by the competition or benchmark. By default, the compute worker of the default queue is a docker container run by the main VM. If your server is used by many users and receives several submissions per day, it is recommended to use separate compute workers and to link them to the default queue.

To set up a compute worker, follow this [guide](#)

In the `.env` file of the compute worker, the `BROKER_URL` should reflect settings of the `.env` file of the platform:

`.env`

```
BROKER_URL=pyamqp://<RABBITMQ_DEFAULT_USER>:<RABBITMQ_DEFAULT_PASS>@<DOMAIN_NAME>:<RABBITMQ_PORT>/
HOST_DIRECTORY=/codabench
BROKER_USE_SSL=True
```

4.2.13 Personalize Main Banner

The main banner on the Codabench home page shows 3 organization logos

- LISN
- Université Paris-Saclay
- CNRS



You can update these by:

1. Replacing the logos in `src/static/img/` folder
2. Updating the code in `src/templates/pages/home.html` to point to the right websites of your organizations

4.2.14 Frequently asked questions (FAQs)

Invalid HTTP method

Exception detail (by using `docker logs -f codabench_django_1`)

```
Traceback (most recent call last):
  File "/usr/local/lib/python3.8/site-packages/uvicorn/protocols/http/httptools_impl.py", line 165, in data_received
    self.parser.feed_data(data)
  File "httptools/parser/parser.pyx", line 193, in httptools.parser.parser.HttpParser.feed_data
httptools.parser.errors.HttpParserInvalidMethodError: invalid HTTP method
[2021-02-09 06:58:58 +0000] [14] [WARNING] Invalid HTTP request received.
Traceback (most recent call last):
  File "/usr/local/lib/python3.8/site-packages/uvicorn/protocols/http/httptools_impl.py", line 165, in data_received
    self.parser.feed_data(data)
  File "httptools/parser/parser.pyx", line 193, in httptools.parser.parser.HttpParser.feed_data
httptools.parser.errors.HttpParserInvalidMethodError: invalid HTTP method
```

Solution

- First, modify the `.env` file and set `DJANGO_SETTINGS_MODULE=settings.development`
- Then, restart services by using following docker-compose command

```
docker compose down --volumes
docker compose up -d
```

Missing static resources (css/js)

Solution: Change the value of the `DEBUG` parameter to `True`

- nano competitions-v2/src/settings/base.py
- DEBUG = os.environ.get("DEBUG", True)

```

competitions-v2 > src > settings > base.py >
Project .uucerignore .base.py
.editorconfig DEBUG
.env
.env_circlegi
.env_sample
.gitignore
.app.json
Caddyfile
circle.yml
confest.py
.docker-compose.selenium.yml
.docker-compose.yml
Dockerfile
Dockerfile.builder

```

```

140 SOCIAL_AUTH_CHAHUB_SECRET = os.environ.get('SOCIAL_AUTH_CHAHUB_SECRET', 'asdfsdfasf')
141
142 # Generic
143 SOCIAL_AUTH_STRATEGY = 'social_django.strategy.DjangoStrategy'
144 SOCIAL_AUTH_STORAGE = 'social_django.models.DjangoStorage'
145 SOCIAL_AUTH_ADMIN_USER_SEARCH_FIELDS = ['username', 'first_name', 'email']
146
147 # User Models
148 AUTH_USER_MODEL = 'profiles.User'
149 SOCIAL_AUTH_USER_MODEL = 'profiles.User'
150
151 # =====
152 # Debugging
153 #===== DEBUG = os.environ.get("DEBUG", True)
154
155

```

- Also comment out the following code in base.py

```

competitions-v2 > src > settings > base.py >
Project .uucerignore .base.py
.editorconfig DEBUG
.env
.env_circlegi
.env_sample
.gitignore
.app.json
Caddyfile
circle.yml
confest.py
.docker-compose.selenium.yml
.docker-compose.yml
Dockerfile
Dockerfile.builder
Dockerfile.celery
Dockerfile.compute_worker
Dockerfile.compute_worker_gpu
Dockerfile.flower
fabfile.py
LICENSE
manage.py
package.json
package-lock.json
Procfile
README.md
requirements.dev.txt
requirements.txt
reset_db.sh

```

```

388 # Google Cloud Storage
389 GS_PUBLIC_BUCKET_NAME = os.environ.get('GS_PUBLIC_BUCKET_NAME')
390 GS_PRIVATE_BUCKET_NAME = os.environ.get('GS_PRIVATE_BUCKET_NAME')
391 GS_BUCKET_NAME = GS_PUBLIC_BUCKET_NAME # Default bucket set to public bucket
392
393 # =====
394 # Debug
395 # if DEBUG:
396 #     INSTALLED_APPS += ('debug_toolbar',)
397 #     MIDDLEWARE = ['debug_toolbar.middleware.DebugToolbarMiddleware',
398 #                   'querycount.middleware.QueryCountMiddleware',
399 #                   ] + MIDDLEWARE # we want Debug Middleware at the top
400 #     # tricks to have debug toolbar when developing with docker
401 #     INTERNAL_IPS = ['127.0.0.1']
402 #
403 #     import socket
404 #
405 #     try:
406 #         INTERNAL_IPS.append(socket.gethostbyname(socket.gethostname()[:-1])
407 #     except socket.gaierror:
408 #         pass
409 #
410 #     QUERYCOUNT = {
411 #         'IGNORE_REQUEST_PATTERNS': [
412 #             r'^/admin/',
413 #             r'^/static/',
414 #         ]
415 #     }
416 #
417 #     DEBUG_TOOLBAR_CONFIG = {
418 #         "SHOW_TOOLBAR_CALLBACK": lambda request: True
419 #     }
420 #
421
422

```

CORS Error (could not upload bundle)

Exception detail (by checkout google develop tools)


```

botocore.exceptions.EndpointConnectionError: Could not connect to the endpoint URL: "[http://docker.for.mac.localhost:9000/private/dataset/2021-02-18-1613624215/24533cf523e/competition.zip](http://docker.for.mac.localhost:9000/private/dataset/2021-02-18-1613624215/24533cf523e/competition.zip)"

```


Solution: Set AWS_S3_ENDPOINT_URL to an address that is accessible to the external network

- nano codabench/.env

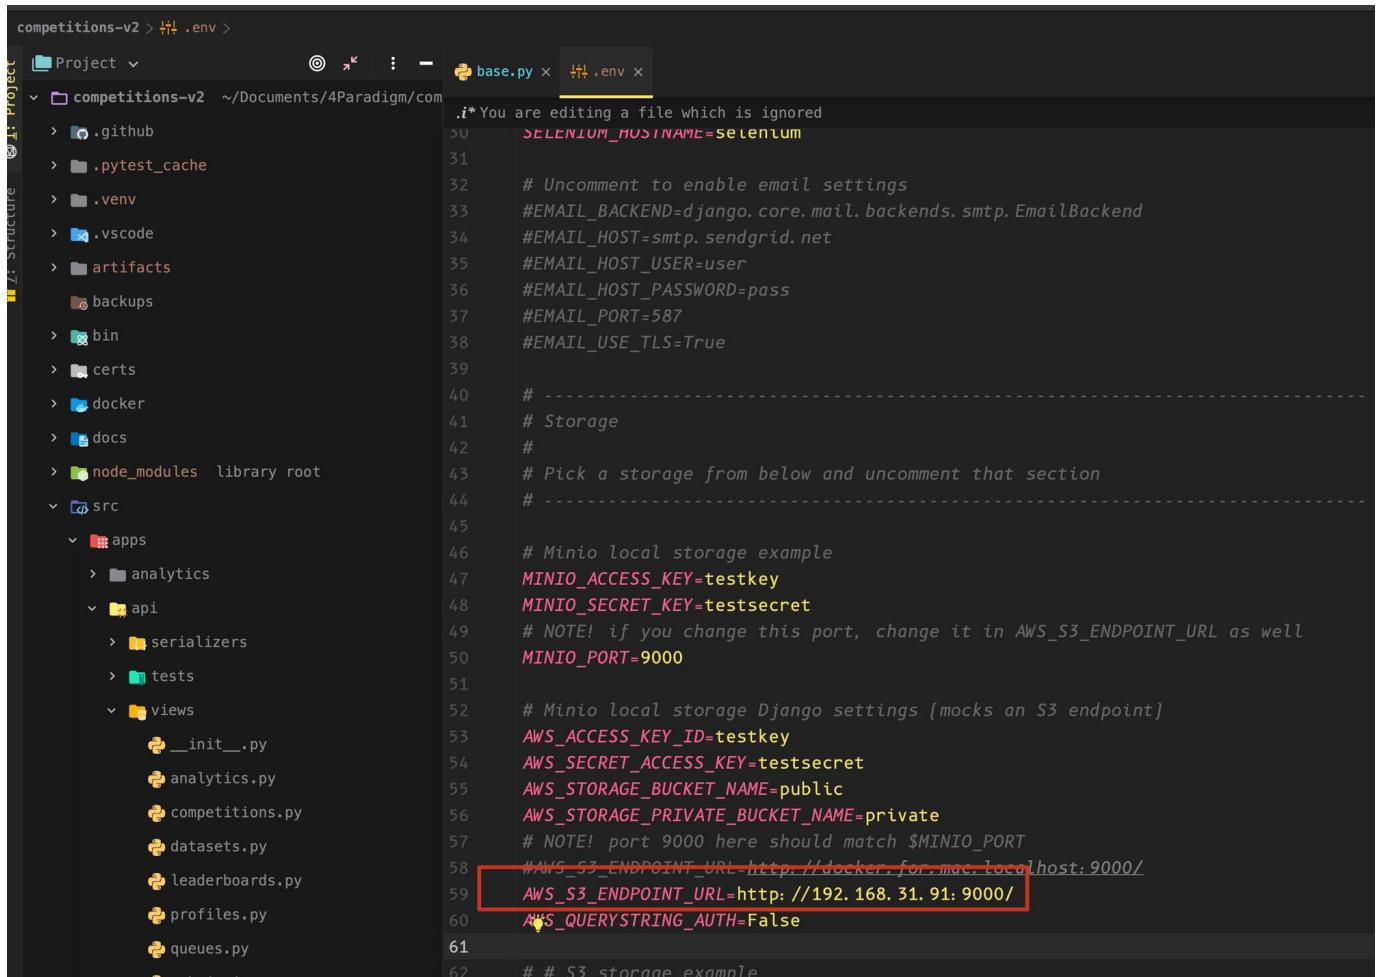

```

competitions-v2 > .env >
Project  .env  base.py  .env
competitions-v2 ~/Documents/4Paradigm/com
  .github
  .pytest_cache
  .venv
  .vscode
  artifacts
  backups
  bin
  certs
  docker
  docs
  node_modules library root
  src
    apps
      analytics
      api
        serializers
        tests
        views
          __init__.py
          analytics.py
          competitions.py
          datasets.py
          leaderboards.py
          profiles.py
          queues.py
  .i* You are editing a file which is ignored
  50  SELENIUM_HUB_INNAME=selenium
  51
  52  # Uncomment to enable email settings
  53  #EMAIL_BACKEND=django.core.mail.backends.smtp.EmailBackend
  54  #EMAIL_HOST=smtp.sendgrid.net
  55  #EMAIL_HOST_USER=user
  56  #EMAIL_HOST_PASSWORD=pass
  57  #EMAIL_PORT=587
  58  #EMAIL_USE_TLS=True
  59
  60  # -----
  61  # Storage
  62  #
  63  # Pick a storage from below and uncomment that section
  64  #
  65
  66  # Minio local storage example
  67  MINIO_ACCESS_KEY=testkey
  68  MINIO_SECRET_KEY=testsecret
  69  # NOTE! if you change this port, change it in AWS_S3_ENDPOINT_URL as well
  70  MINIO_PORT=9000
  71
  72  # Minio local storage Django settings [mocks an S3 endpoint]
  73  AWS_ACCESS_KEY_ID=testkey
  74  AWS_SECRET_ACCESS_KEY=testsecret
  75  AWS_STORAGE_BUCKET_NAME=public
  76  AWS_STORAGE_PRIVATE_BUCKET_NAME=private
  77  # NOTE! port 9000 here should match $MINIO_PORT
  78  #AWS_S3_ENDPOINT_URL=http://docker.for.mac.localhost:9000/
  79  AWS_S3_ENDPOINT_URL=http://192.168.31.91:9000/
  80  AWS_QUERYSTRING_AUTH=False
  81
  82  # # S3 storage example
  83
  84
  85
  86
  87
  88
  89
  90
  91
  92
  93
  94
  95
  96
  97
  98
  99
  100
  101
  102
  103
  104
  105
  106
  107
  108
  109
  110
  111
  112
  113
  114
  115
  116
  117
  118
  119
  120
  121
  122
  123
  124
  125
  126
  127
  128
  129
  130
  131
  132
  133
  134
  135
  136
  137
  138
  139
  140
  141
  142
  143
  144
  145
  146
  147
  148
  149
  150
  151
  152
  153
  154
  155
  156
  157
  158
  159
  160
  161
  162
  163
  164
  165
  166
  167
  168
  169
  170
  171
  172
  173
  174
  175
  176
  177
  178
  179
  180
  181
  182
  183
  184
  185
  186
  187
  188
  189
  190
  191
  192
  193
  194
  195
  196
  197
  198
  199
  200
  201
  202
  203
  204
  205
  206
  207
  208
  209
  210
  211
  212
  213
  214
  215
  216
  217
  218
  219
  220
  221
  222
  223
  224
  225
  226
  227
  228
  229
  230
  231
  232
  233
  234
  235
  236
  237
  238
  239
  240
  241
  242
  243
  244
  245
  246
  247
  248
  249
  250
  251
  252
  253
  254
  255
  256
  257
  258
  259
  260
  261
  262
  263
  264
  265
  266
  267
  268
  269
  270
  271
  272
  273
  274
  275
  276
  277
  278
  279
  280
  281
  282
  283
  284
  285
  286
  287
  288
  289
  290
  291
  292
  293
  294
  295
  296
  297
  298
  299
  300
  301
  302
  303
  304
  305
  306
  307
  308
  309
  310
  311
  312
  313
  314
  315
  316
  317
  318
  319
  320
  321
  322
  323
  324
  325
  326
  327
  328
  329
  330
  331
  332
  333
  334
  335
  336
  337
  338
  339
  340
  341
  342
  343
  344
  345
  346
  347
  348
  349
  350
  351
  352
  353
  354
  355
  356
  357
  358
  359
  360
  361
  362
  363
  364
  365
  366
  367
  368
  369
  370
  371
  372
  373
  374
  375
  376
  377
  378
  379
  380
  381
  382
  383
  384
  385
  386
  387
  388
  389
  390
  391
  392
  393
  394
  395
  396
  397
  398
  399
  400
  401
  402
  403
  404
  405
  406
  407
  408
  409
  410
  411
  412
  413
  414
  415
  416
  417
  418
  419
  420
  421
  422
  423
  424
  425
  426
  427
  428
  429
  430
  431
  432
  433
  434
  435
  436
  437
  438
  439
  440
  441
  442
  443
  444
  445
  446
  447
  448
  449
  450
  451
  452
  453
  454
  455
  456
  457
  458
  459
  460
  461
  462
  463
  464
  465
  466
  467
  468
  469
  470
  471
  472
  473
  474
  475
  476
  477
  478
  479
  480
  481
  482
  483
  484
  485
  486
  487
  488
  489
  490
  491
  492
  493
  494
  495
  496
  497
  498
  499
  500
  501
  502
  503
  504
  505
  506
  507
  508
  509
  510
  511
  512
  513
  514
  515
  516
  517
  518
  519
  520
  521
  522
  523
  524
  525
  526
  527
  528
  529
  530
  531
  532
  533
  534
  535
  536
  537
  538
  539
  540
  541
  542
  543
  544
  545
  546
  547
  548
  549
  550
  551
  552
  553
  554
  555
  556
  557
  558
  559
  560
  561
  562
  563
  564
  565
  566
  567
  568
  569
  570
  571
  572
  573
  574
  575
  576
  577
  578
  579
  580
  581
  582
  583
  584
  585
  586
  587
  588
  589
  590
  591
  592
  593
  594
  595
  596
  597
  598
  599
  600
  601
  602
  603
  604
  605
  606
  607
  608
  609
  610
  611
  612
  613
  614
  615
  616
  617
  618
  619
  620
  621
  622
  623
  624
  625
  626
  627
  628
  629
  630
  631
  632
  633
  634
  635
  636
  637
  638
  639
  640
  641
  642
  643
  644
  645
  646
  647
  648
  649
  650
  651
  652
  653
  654
  655
  656
  657
  658
  659
  660
  661
  662
  663
  664
  665
  666
  667
  668
  669
  670
  671
  672
  673
  674
  675
  676
  677
  678
  679
  680
  681
  682
  683
  684
  685
  686
  687
  688
  689
  690
  691
  692
  693
  694
  695
  696
  697
  698
  699
  700
  701
  702
  703
  704
  705
  706
  707
  708
  709
  710
  711
  712
  713
  714
  715
  716
  717
  718
  719
  720
  721
  722
  723
  724
  725
  726
  727
  728
  729
  730
  731
  732
  733
  734
  735
  736
  737
  738
  739
  740
  741
  742
  743
  744
  745
  746
  747
  748
  749
  750
  751
  752
  753
  754
  755
  756
  757
  758
  759
  760
  761
  762
  763
  764
  765
  766
  767
  768
  769
  770
  771
  772
  773
  774
  775
  776
  777
  778
  779
  780
  781
  782
  783
  784
  785
  786
  787
  788
  789
  790
  791
  792
  793
  794
  795
  796
  797
  798
  799
  800
  801
  802
  803
  804
  805
  806
  807
  808
  809
  810
  811
  812
  813
  814
  815
  816
  817
  818
  819
  820
  821
  822
  823
  824
  825
  826
  827
  828
  829
  830
  831
  832
  833
  834
  835
  836
  837
  838
  839
  840
  841
  842
  843
  844
  845
  846
  847
  848
  849
  850
  851
  852
  853
  854
  855
  856
  857
  858
  859
  860
  861
  862
  863
  864
  865
  866
  867
  868
  869
  870
  871
  872
  873
  874
  875
  876
  877
  878
  879
  880
  881
  882
  883
  884
  885
  886
  887
  888
  889
  890
  891
  892
  893
  894
  895
  896
  897
  898
  899
  900
  901
  902
  903
  904
  905
  906
  907
  908
  909
  910
  911
  912
  913
  914
  915
  916
  917
  918
  919
  920
  921
  922
  923
  924
  925
  926
  927
  928
  929
  930
  931
  932
  933
  934
  935
  936
  937
  938
  939
  940
  941
  942
  943
  944
  945
  946
  947
  948
  949
  950
  951
  952
  953
  954
  955
  956
  957
  958
  959
  960
  961
  962
  963
  964
  965
  966
  967
  968
  969
  970
  971
  972
  973
  974
  975
  976
  977
  978
  979
  980
  981
  982
  983
  984
  985
  986
  987
  988
  989
  990
  991
  992
  993
  994
  995
  996
  997
  998
  999
  1000
  1001
  1002
  1003
  1004
  1005
  1006
  1007
  1008
  1009
  1010
  1011
  1012
  1013
  1014
  1015
  1016
  1017
  1018
  1019
  1020
  1021
  1022
  1023
  1024
  1025
  1026
  1027
  1028
  1029
  1030
  1031
  1032
  1033
  1034
  1035
  1036
  1037
  1038
  1039
  1040
  1041
  1042
  1043
  1044
  1045
  1046
  1047
  1048
  1049
  1050
  1051
  1052
  1053
  1054
  1055
  1056
  1057
  1058
  1059
  1060
  1061
  1062
  1063
  1064
  1065
  1066
  1067
  1068
  1069
  1070
  1071
  1072
  1073
  1074
  1075
  1076
  1077
  1078
  1079
  1080
  1081
  1082
  1083
  1084
  1085
  1086
  1087
  1088
  1089
  1090
  1091
  1092
  1093
  1094
  1095
  1096
  1097
  1098
  1099
  1100
  1101
  1102
  1103
  1104
  1105
  1106
  1107
  1108
  1109
  1110
  1111
  1112
  1113
  1114
  1115
  1116
  1117
  1118
  1119
  1120
  1121
  1122
  1123
  1124
  1125
  1126
  1127
  1128
  1129
  1130
  1131
  1132
  1133
  1134
  1135
  1136
  1137
  1138
  1139
  1140
  1141
  1142
  1143
  1144
  1145
  1146
  1147
  1148
  1149
  1150
  1151
  1152
  1153
  1154
  1155
  1156
  1157
  1158
  1159
  1160
  1161
  1162
  1163
  1164
  1165
  1166
  1167
  1168
  1169
  1170
  1171
  1172
  1173
  1174
  1175
  1176
  1177
  1178
  1179
  1180
  1181
  1182
  1183
  1184
  1185
  1186
  1187
  1188
  1189
  1190
  1191
  1192
  1193
  1194
  1195
  1196
  1197
  1198
  1199
  1200
  1201
  1202
  1203
  1204
  1205
  1206
  1207
  1208
  1209
  1210
  1211
  1212
  1213
  1214
  1215
  1216
  1217
  1218
  1219
  1220
  1221
  1222
  1223
  1224
  1225
  1226
  1227
  1228
  1229
  1230
  1231
  1232
  1233
  1234
  1235
  1236
  1237
  1238
  1239
  1240
  1241
  1242
  1243
  1244
  1245
  1246
  1247
  1248
  1249
  1250
  1251
  1252
  1253
  1254
  1255
  1256
  1257
  1258
  1259
  1260
  1261
  1262
  1263
  1264
  1265
  1266
  1267
  1268
  1269
  1270
  1271
  1272
  1273
  1274
  1275
  1276
  1277
  1278
  1279
  1280
  1281
  1282
  1283
  1284
  1285
  1286
  1287
  1288
  1289
  1290
  1291
  1292
  1293
  1294
  1295
  1296
  1297
  1298
  1299
  1300
  1301
  1302
  1303
  1304
  1305
  1306
  1307
  1308
  1309
  1310
  1311
  1312
  1313
  1314
  1315
  1316
  1317
  1318
  1319
  1320
  1321
  1322
  1323
  1324
  1325
  1326
  1327
  1328
  1329
  1330
  1331
  1332
  1333
  1334
  1335
  1336
  1337
  1338
  1339
  1340
  1341
  1342
  1343
  1344
  1345
  1346
  1347
  1348
  1349
  1350
  1351
  1352
  1353
  1354
  1355
  1356
  1357
  1358
  1359
  1360
  1361
  1362
  1363
  1364
  1365
  1366
  1367
  1368
  1369
  1370
  1371
  1372
  1373
  1374
  1375
  1376
  1377
  1378
  1379
  1380
  1381
  1382
  1383
  1384
  1385
  1386
  1387
  1388
  1389
  1390
  1391
  1392
  1393
  1394
  1395
  1396
  1397
  1398
  1399
  1400
  1401
  1402
  1403
  1404
  1405
  1406
  1407
  1408
  1409
  1410
  1411
  1412
  1413
  1414
  1415
  1416
  1417
  1418
  1419
  1420
  1421
  1422
  1423
  1424
  1425
  1426
  1427
  1428
  1429
  1430
  1431
  1432
  1433
  1434
  1435
  1436
  1437
  1438
  1439
  1440
  1441
  1442
  1443
  1444
  1445
  1446
  1447
  1448
  1449
  1450
  1451
  1452
  1453
  1454
  1455
  1456
  1457
  1458
  1459
  1460
  1461
  1462
  1463
  1464
  1465
  1466
  1467
  1468
  1469
  1470
  1471
  1472
  1473
  1474
  1475
  1476
  1477
  1478
  1479
  1480
  1481
  1482
  1483
  1484
  1485
  1486
  1487
  1488
  1489
  1490
  1491
  1492
  1493
  1494
  1495
  1496
  1497
  1498
  1499
  1500
  1501
  1502
  1503
  1504
  1505
  1506
  1507
  1508
  1509
  1510
  1511
  1512
  1513
  1514
  1515
  1516
  1517
  1518
  1519
  1520
  1521
  1522
  1523
  1524
  1525
  1526
  1527
  1528
  1529
  1530
  1531
  1532
  1533
  1534
  1535
  1536
  1537
  1538
  1539
  1540
  1541
  1542
  1543
  1544
  1545
  1546
  1547
  1548
  1549
  1550
  1551
  1552
  1553
  1554
  1555
  1556
  1557
  1558
  1559
  1560
  1561
  1562
  1563
  1564
  1565
  1566
  1567
  1568
  1569
  1570
  1571
  1572
  1573
  1574
  1575
  1576
  1577
  1578
  1579
  1580
  1581
  1582
  1583
  1584
  1585
  1586
  1587
  1588
  1589
  1590
  1591
  1592
  1593
  1594
  1595
  1596
  1597
  1598
  1599
  1600
  1601
  1602
  1603
  1604
  1605
  1606
  1607
  1608
  1609
  1610
  1611
  1612
  1613
  1614
  1615
  1616
  1617
  1618
  1619
  1620
  1621
  1622
  1623
  1624
  1625
  1626
  1627
  1628
  1629
  1630
  1631
  1632
  1633
  1634
  1635
  1636
  1637
  1638
  1639
  1640
  1641
  1642
  1643
  1644
  1645
  1646
  1647
  1648
  1649
  1650
  1651
  1652
  1653
  1654
  1655
  1656
  1657
  1658
  1659
  1660
  1661
  1662
  1663
  1664
  1665
  1666
  1667
  1668
  1669
  1670
  1671
  1672
  1673
  1674
  1675
  1676
  1677
  1678
  1679
  1680
  1681
  1682
  1683
  1684
  1685
  1686
  1687
  1688
  1689
  1690
  1691
  1692
  1693
  1694
  1695
  1696
  1697
  1698
  1699
  1700
  1701
  1702
  1703
  1704
  1705
  1706
  1707
  1708
  1709
  1710
  1711
  1712
  1713
  1714
  1715
  171
```

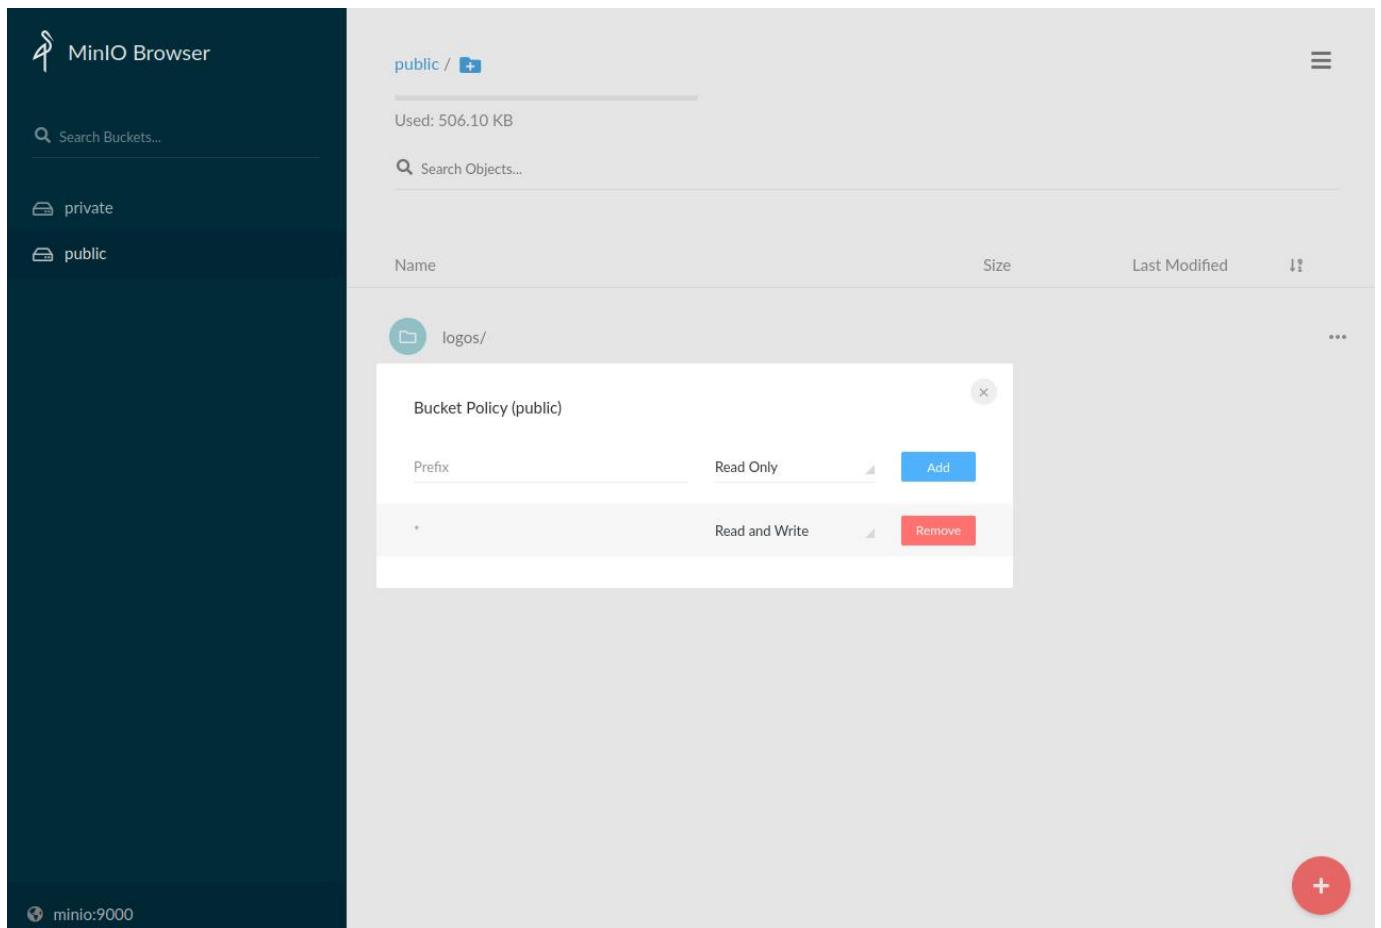

Compute worker execution with insufficient privileges

This issue may be encountered when starting a docker container in a compute worker, the problem is caused by the installation of snap docker (if you are using Ubuntu).

Solution

- Uninstall snap docker
- Install the official version of docker

4.2.15 Securing Codabench and Minio

Codabench uses [Caddy](#) to manage HTTPS and to secure Codabench. What you need is a valid DNS pointed towards the IP address of your instance.

Secure Minio with a reverse proxy

To secure MinIO, you should install a reverse-proxy, e.g: Nginx, and have a valid SSL certificate. Here is a tutorial sample:

[Secure MinIO with Certbot and Letsencrypt](#)

Don't forget to update your AWS_S3_ENDPOINT_URL parameter

Update it to `AWS_S3_ENDPOINT_URL=https://<your_minio>`

Secure Minio on the same server as codabench (simpler)


Summary:

- Use same SSL certs from letsencrypt (certbot) but change fullchain.pem -> public.crt and privkey.pem -> private.key. I copied from ./certs/caddy (for django/caddy) to ./certs/minio/certs.
- You need to change the command for minio to "server /export --certs-dir /root/.minio/certs" and not just "server /export"
- Mount in certs:
- Add "- ./certs/minio:/root/.minio" under the minio service's "volumes" section
- Certs must be in \${HOME}/.minio and for dockers ends up being /root/.minio
- Edit the .env with minio cert location:

```
MINIO_CERT_FILE=/root/.minio/certs/public.crt
MINIO_KEY_FILE=/root/.minio/certs/private.key
# MINIO_CERTS_DIR=/certs/caddy # was told .pem files could work but for now separating
MINIO_CERTS_DIR=/root/.minio/certs # either this or the CERT\KEY above is redundant...but it works for now.
# NOTE! if you change this port, change it in AWS_S3_ENDPOINT_URL as well
MINIO_PORT=9000
```

- Here is an example docker-compose.yml change for this:

```
#-----
# Minio local storage helper
#-----
minio:
  image: minio/minio:RELEASE.2020-10-03T02-19-42Z
  command: server /export --certs-dir /root/.minio/certs
  volumes:
    - ./var/minio:/export
    - ./certs/minio:/root/.minio
  restart: unless-stopped
  ports:
    - $MINIO_PORT:9000
  env_file: .env
  healthcheck:
    test: ["CMD", "nc", "-z", "minio", "9000"]
    interval: 5s
    retries: 5
  createbuckets:
    image: minio/mc
    depends_on:
      minio:
        condition: service_healthy
    env_file: .env
  # volumes:
  #   This volume is shared with `minio`, so `z` to share it
  #   - ./var/minio:/export
  entrypoint: >
    /bin/sh -c "
    set -x;
    if [ -n \"\$MINIO_ACCESS_KEY\" ] && [ -n \"\$MINIO_SECRET_KEY\" ] && [ -n \"\$MINIO_PORT\" ]; then
      until /usr/bin/mc config host add minio_docker https://minio:$MINIO_PORT $MINIO_ACCESS_KEY $MINIO_SECRET_KEY && break; do
        echo '...waiting...' && sleep 5;
      done;
      /usr/bin/mc mb minio_docker/$AWS_STORAGE_BUCKET_NAME || echo 'Bucket $AWS_STORAGE_BUCKET_NAME already exists.';
      /usr/bin/mc mb minio_docker/$AWS_STORAGE_PRIVATE_BUCKET_NAME || echo 'Bucket $AWS_STORAGE_PRIVATE_BUCKET_NAME already exists.';
      /usr/bin/mc anonymous set download minio_docker/$AWS_STORAGE_BUCKET_NAME;
    else
      echo 'MINIO_ACCESS_KEY, MINIO_SECRET_KEY, or MINIO_PORT are not defined. Skipping buckets creation.';
    fi;
    exit 0;
  "
```

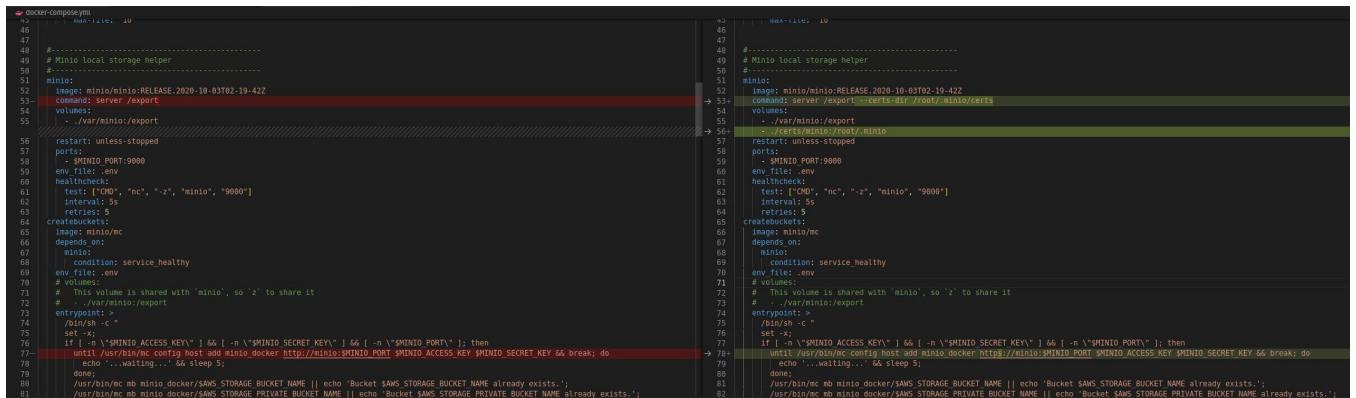

```
42  #-----
43  # Minio local storage helper
44  #-----
45  minio:
46  image: minio/minio:RELEASE.2020-10-03T02-19-42Z
47  command: server /export --certs-dir /root/.minio/certs
48  volumes:
49    - ./var/minio:/export
50    - ./certs/minio:/root/.minio
51  restart: unless-stopped
52  ports:
53    - $MINIO_PORT:9000
54  env_file: .env
55  healthcheck:
56    test: ["CMD", "nc", "-z", "minio", "9000"]
57    interval: 5s
58  createbuckets:
59    image: minio/mc
60    depends_on:
61      minio:
62        condition: service_healthy
63    env_file: .env
64  # volumes:
65  #   This volume is shared with `minio`, so `z` to share it
66  #   - ./var/minio:/export
67  entrypoint: >
68    /bin/sh -c "
69    set -x;
70    if [ -n \"\$MINIO_ACCESS_KEY\" ] && [ -n \"\$MINIO_SECRET_KEY\" ] && [ -n \"\$MINIO_PORT\" ]; then
71      until /usr/bin/mc config host add minio_docker https://minio:$MINIO_PORT $MINIO_ACCESS_KEY $MINIO_SECRET_KEY && break; do
72        echo '...waiting...' && sleep 5;
73      done;
74      /usr/bin/mc mb minio_docker/$AWS_STORAGE_BUCKET_NAME || echo 'Bucket $AWS_STORAGE_BUCKET_NAME already exists.';
75      /usr/bin/mc mb minio_docker/$AWS_STORAGE_PRIVATE_BUCKET_NAME || echo 'Bucket $AWS_STORAGE_PRIVATE_BUCKET_NAME already exists.';
76    else
77      echo 'MINIO_ACCESS_KEY, MINIO_SECRET_KEY, or MINIO_PORT are not defined. Skipping buckets creation.';
78    fi;
79    exit 0;
80  "
```

 **Note**

Don't forget to change the entrypoint to run **https** and not **http**.

4.2.16 Workaround: MinIO and Django on the same machine with only the port 443 opened to the external network.

The S3 API signature calculation algorithm does not support proxy schemes where you host the MinIO Server API such as example.net/s3/.

However, we can set the same URL for minio and django site and configure a proxy for each bucket in the Caddyfile :

```
DOMAIN_NAME=https://mysite.com
AWS_S3_ENDPOINT_URL=https://mysite.com
```

Caddyfile :

```
@dynamic {
    not path /static/* /media/* /{$AWS_STORAGE_BUCKET_NAME}* /{$AWS_STORAGE_PRIVATE_BUCKET_NAME}* /minio*
}
reverse_proxy @dynamic django:8000

@min_bucket {
    path /{$AWS_STORAGE_BUCKET_NAME}* /{$AWS_STORAGE_PRIVATE_BUCKET_NAME}*
}
reverse_proxy @min_bucket minio:{$MINIO_PORT}
```

4.3 Administrative Procedures

4.3.1 Maintenance Mode

You can turn on maintenance mode by creating a `maintenance.on` file in the `maintenance_mode` folder. This will change the front page of the website, showing a customizable page (the `maintenance.html` file in the same folder).

Simply remove the `maintenance_mode/maintenance.on` file to end maintenance mode.

During testing, if you want to update or restart some services (e.g : Django), you should follow the following steps:

```
docker compose stop django
docker compose rm django ## remove old django container
docker compose create django ## create new django container with the changes from your development
docker compose start django
```

This procedure helps you update changes of your development on Django without having to restart every Codabench container.

4.3.2 Give superuser privileges to a user

With superuser privileges, the user can edit any benchmark and can access the Django admin interface.

```
docker compose exec django ./manage.py shell_plus
u = User.objects.get(username='<USERNAME>') ## can also use email
u.is_staff = True
u.is_superuser = True
u.save()
```

4.3.3 Migration

```
docker compose exec django ./manage.py makemigrations
docker compose exec django ./manage.py migrate
```

4.3.4 Collect static files

```
docker compose exec django ./manage.py collectstatic --noinput
```

4.3.5 Delete POSTGRESDB and MINIO :

⚠ Warning

This will delete all your data !

```
## Begin in codabench root directory
cd codabench
```

PURGE DATA

```
sudo rm -r var/postgres/*
sudo rm -r var/minio/*
```

SEE DATA WE ARE GOING TO PURGE

```
ls var
```

RESTART SERVICES AND RECREATE DATABASE TABLES

```
docker compose down
docker compose up -d
docker compose exec django ./manage.py migrate
```

4.3.6 Feature competitions in home page

There are two ways of setting a competition as featured: 1. Use Django admin (see below) -> click the competition -> scroll down to is featured filed -> Check/Uncheck it 2. Use competition ID in the django bash to feature or unfeature a competition


```
docker compose exec django ./manage.py shell_plus
comp = Competition.objects.get(id=<ID>) ## replace <ID> with competition id
comp.is_featured = True ## set to False if you want to unfeature a competition
comp.save()
```

4.3.7 Shell Based Admin Features

If you're running your own Codabench instance, there are different ways to interact with the application. Inside the `django` container (`docker compose exec django bash`) you can use `python manage.py help` to display all available commands and a brief description. By far the most useful are `createsuperuser` and `shell/shell_plus`.

4.3.8 Django Admin interface

Once you log in an account with superuser privileges, you have access to the "Django Admin" interface:

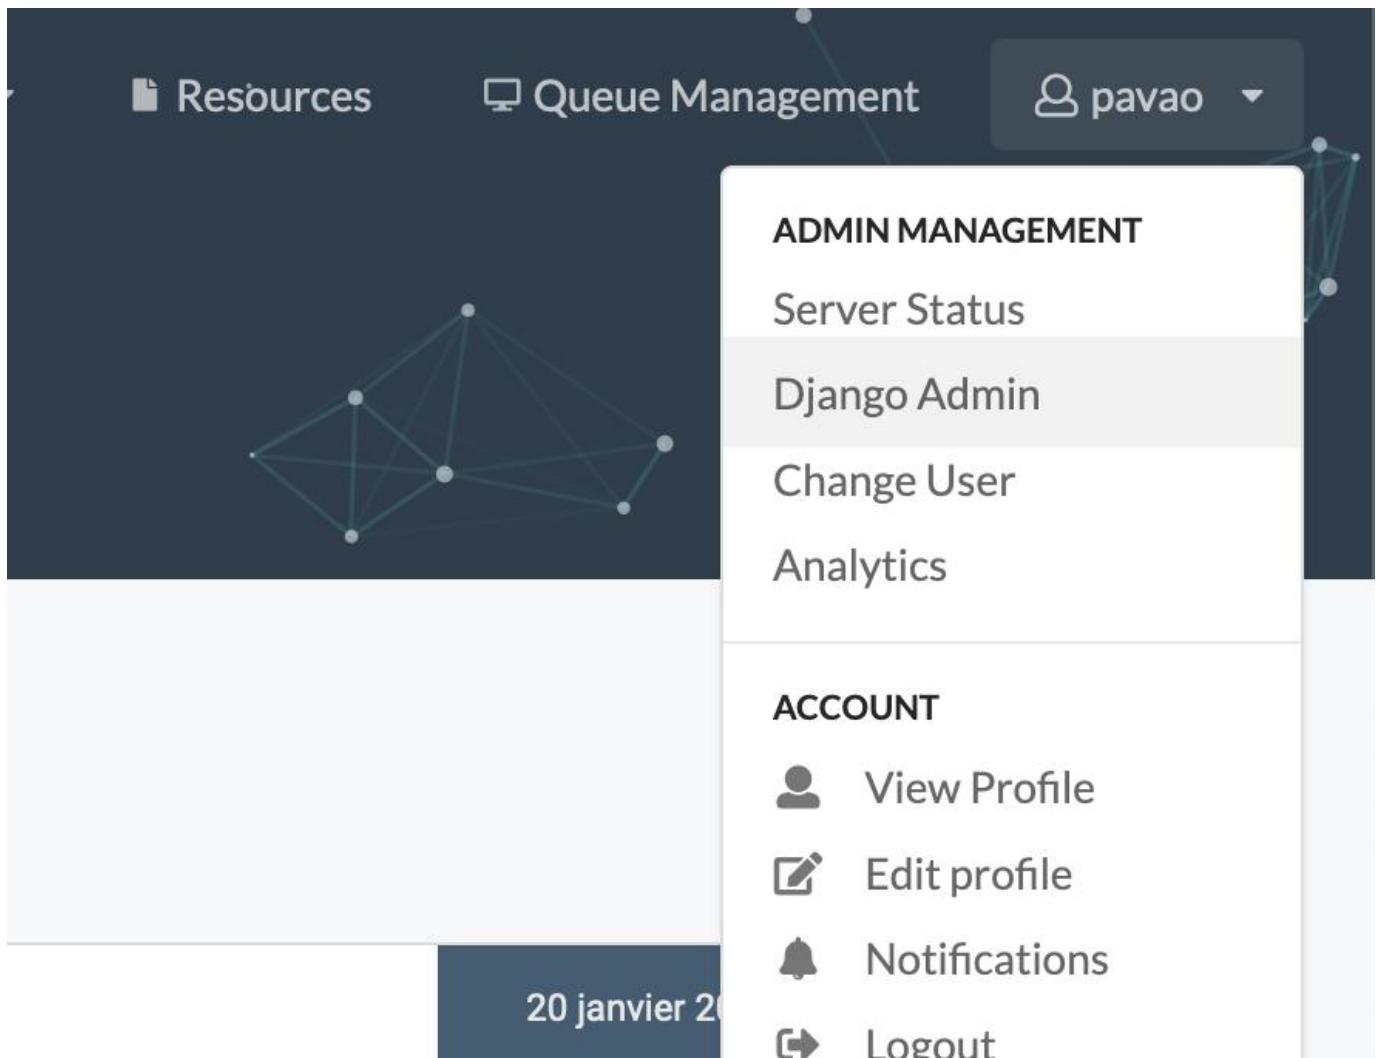

From this interface, you can change a user's quota, change their staff and superuser status, change the featured competitions displayed on the homepage, manage user accounts and more.

EDIT ANNOUNCEMENT AND NEWS

In the Django admin interface, click on `Announcements` or `New posts`:

ANNOUNCEMENTS

Announcements	+ Add	Change
News posts	+ Add	Change

For announcement, only the first announcement is read by the front page. For news, all objects are read as separate news. You can create and edit objects using the interface. Write the announcement and news using HTML to format the text, add links, and more:

Text: `<p>Welcome to Codabench!</p>`

DELETE A USER

Go to `Users`:

PROFILES

Memberships	+ Add	Change
Organizations	+ Add	Change
Users	+ Add	Change

Select it, select the `Delete selected users` action and click on `Go`:

Action: **Delete selected users** 1 of 100 selected

The screenshot shows a list of users in the RabbitMQ Management interface. The first user in the list has a checked checkbox next to it, indicating it is selected for the action.

4.3.9 RabbitMQ Management

The RabbitMQ management tool allows you to see the status of various queues, virtual hosts, and jobs. By default, you can access it at: `http://<your_codalab_instance>:15672/`. The username/password is your RabbitMQ `.env` settings for username and password. The port is hard-set in `docker-compose.yml` to 15672, but you can always change this if needed. For more information, see: <https://www.rabbitmq.com/management.html>

4.3.10 Flower Management

Flower is a web based tool for monitoring and administrating Celery clusters. By default, you can access the Flower web portal at `http://<your_codalab_instance>:5555/`. The username/password is your Flower `.env` settings for username and password. 5555 is the default port, and cannot be changed without editing the `docker-compose.yml` file.

For more information on flower, please visit: <https://flower.readthedocs.io/en/latest/>

4.3.11 Storage analytics

THE INTERFACE

The storage analytics page is accessible at <codabench-url/analytics/> under the storage tab.

The screenshot shows a dropdown menu from the storage analytics interface. The menu includes options such as Admin Management, Server Status, Django Admin, Change User, and Analytics. The Analytics option is highlighted.

From this interface, you will have access to various analytics data:

- A Storage usage history chart
- A Competitions focused storage evolution, distribution and table
- A Users focused storage evolution, distribution and table

All of those data can be filtered by date range and resolution, and exported as CSVs.

The data displayed in those charts are only calculated from a background analytics task that takes place every Sunday at 02:00 UTC time (value editable in the `src/settings/base.py`).

THE BACKGROUND TASK

The analytics task is a celery task named `analytics.tasks.create_storage_analytics_snapshot`. What it does:

- It scans the database looking for file sizes that are not set or flagged in error
- Actually measures their size and saves it in the database
- Aggregate the storage space used by day and by Competition/User (for example every day for the last year for each competition) by looking at the database file size fields
- For data related to the *Platform Administration* it measures as well the database backup folder directly from the storage instance.
- Everything is saved as multiple snapshot in time in each Category table (i.g.: `UserStorageDataPoint`)
- This task also runs a database <-> storage inconsistency check and saves the results in a log file located in the `var/logs/` folder

To manually start the task, you can do the following:

- Start codabench `docker compose up -d`
- Bash into the django container and start a python console:

```
docker compose exec django ./manage.py shell_plus
```

- Manually start the task:

```
from analytics.tasks import create_storage_analytics_snapshot
eager_results = create_storage_analytics_snapshot.apply_async()
```

- If you check the logs (`docker compose logs -f`) of the app you should see "Task `create_storage_analytics_snapshot` started" coming from the `site_worker` container
- If you have to restart the task, don't worry, it will only compute the size of the files that hasn't been computed yet.
- Once the task is over you should be able to see the results on the web page

4.3.12 Homepage counters

There is also a daily background task counting users, competitions and submissions, in order to display it on the homepage.

You can manually run it:

```
docker compose exec django ./manage.py shell_plus
```

```
from analytics.tasks import update_home_page_counters
eager_results = update_home_page_counters.apply_async()
```

4.3.13 User Quota management

INCREASE USER QUOTA

Using the Django Shell

```
docker-compose exec django ./manage.py shell_plus
```

```
u = User.objects.get(username='<USERNAME>') ## can also use email
u.quota = u.quota * 3 # We multiply the quota by 3 in this example
u.save()
```

Using the Django Admin Interface

- Go to the Django admin page
- Click user table
- Select the user for whom you want to increase/decrease quota
- Update the quota field with new quota (in GB e.g. 15)

Quota:

15

4.3.14 Codabench Statistics

You can create two types of codabench statistics:

- Overall platform statistics for a specified year
- Overall published competitions statistics

Follow the steps below to create the statistics

START CODABENCH

```
docker compose up -d
```

BASH INTO THE DJANGO CONTAINER AND START A PYTHON CONSOLE:

```
docker compose exec django ./manage.py shell_plus
```

FOR OVERALL PLATFORM STATISTICS

```
from competitions.statistics import create_codabench_statistics
create_codabench_statistics(year=2024)
```

Note

- If `year` is not specified, the current year is used by default
- A CSV file named `codabench_statistics_2024.csv` is generated in `statistics` folder (for year=2024)


FOR OVERALL PUBLISHED COMPETITIONS STATISTICS

```
from competitions.statistics import create_codabench_statistics_published_comps
create_codabench_statistics_published_comps()
```

Note

A csv file named `codabench_statistics_published_comps.csv` is generated in `statistics` folder

4.4 Codabench Docker Architecture

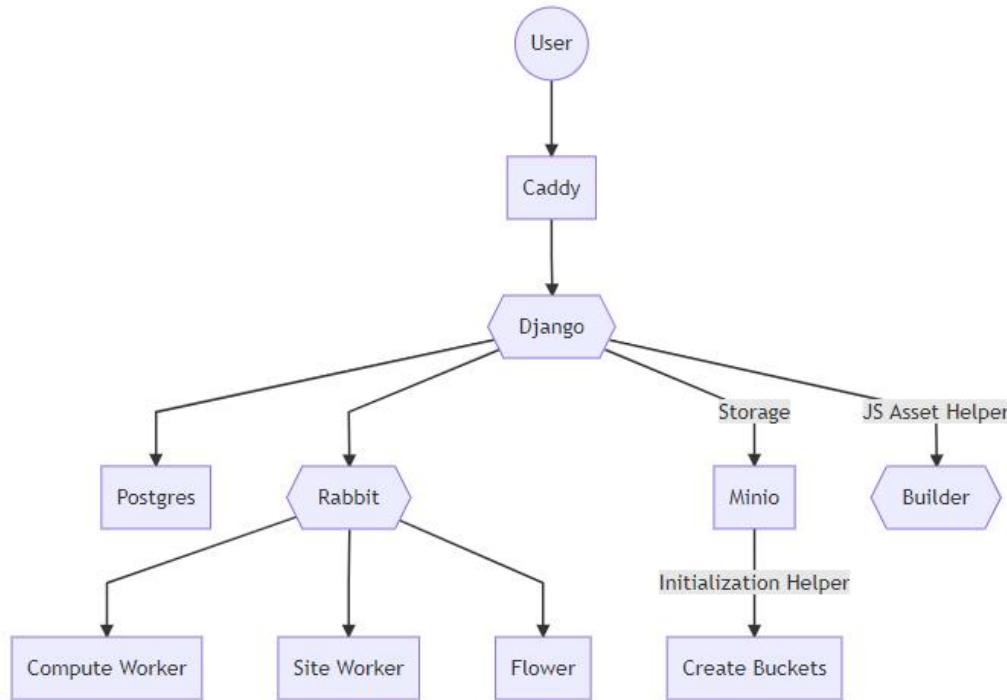

Source:

```

graph TD
    A((User))
    B[Caddy]
    C{Django}
    D[Postgres]
    F{Rabbit}
    G[Minio]
    H[Create Buckets]
    I{Builder}
    K[Flower]
    L[Compute Worker]
    M[Site Worker]
    A --> B
    B --> C
    C --> D
    C --> F
    F --> L
    F --> M
    C -->|Storage|G
    G -->|Initialization Helper| H
    F --> K
    C -->|JS Asset Helper| I
  
```

Codabench consists of many docker containers that are connected and organized through docker compose. Below is an overview of each container and their function:

4.4.1 Django

The main container that runs and contains the python code (A Django project). This is the container that is mainly used for utility functions like creating admins, creating backups, and manually making changes through the python django shell. It has a gunicorn webserver that serves internally on port 8000.


4.4.2 Caddy

The HTTP/HTTPs web server. It acts as a reverse proxy for the Django container. This container controls SSL/HTTPs functionality and other web server configuration options. Serves on port 80/443.

4.4.3 Postgres (Labeled DB in docker-compose)

The default database container. It will contain the default Postgres database used by codabench. (Name/user/pass/etc determined by .env.) If you need to make manual DB changes, this is the container to look into.

Here is the DB schema

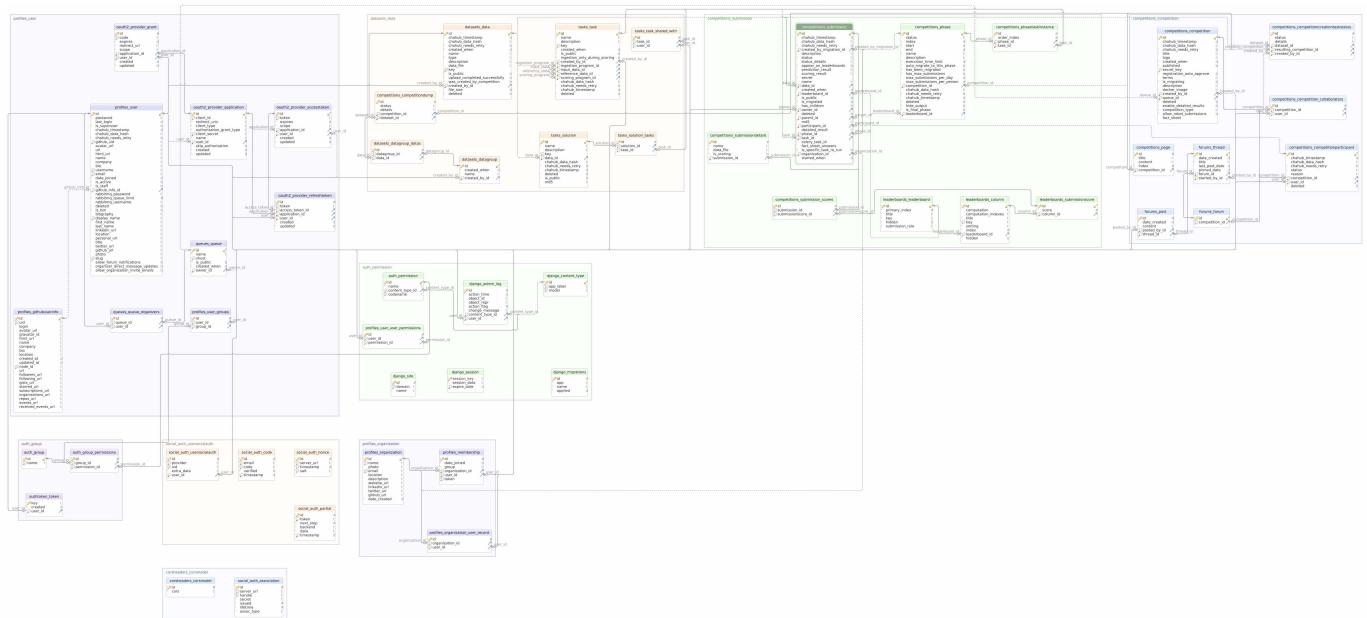

4.4.4 Compute Worker

The container(s) (can be external) that runs submissions for the codabench instance on their associated queues. The default workers are tied to the default queue. Commands to re-build the compute worker Docker image can be found [here](#).

4.4.5 Site Worker

The container that runs various tasks for the Django container such as unpacking and processing a competition bundle.

4.4.6 Minio

The default storage solution container. Runs a MinIO instance that serves on the port defined by settings in your .env.

4.4.7 Create Buckets

A helper container for the Minio container that initially creates the buckets defined by settings in your .env if they don't already exist. Usually this container exits after that.

4.4.8 Builder

A container to build RiotJS tags into a single unified tag that can then be mounted. Uses NPM.

4.4.9 Rabbit

Task/Message management container. Organizes queues for Celery Tasks and compute workers. Any queues that get created are accessible through rabbit's own command line interface.

4.4.10 Flower

Administrative utility container for Celery tasks and queues.

4.4.11 Competition docker image

The services of Codabench run inside Docker environments. This should not be confused with the Docker environment used to run the submissions, which may vary for each benchmark. The docker running submissions is discussed [here](#)

4.5 Submission Docker Container Layout

When you make a submission to Codabench, the information and file are saved to the database. Afterwards, a Celery task gets sent to the compute worker (Default queue or a compute worker attached to a custom queue). From there the compute worker spins up another docker container with either the default docker image for submissions, or a custom one supplied by the organizer.

4.5.1 Site Worker

The site worker can be thought of exactly how it sounds. It's a local celery worker for the site to handle different Celery tasks and other miscellaneous functions. This is what is responsible for creating competition dumps, unpacking competitions, firing off the tasks for re-running submissions, etc.

4.5.2 Compute Worker

Is a remote and/or local celery worker that listens to the main RabbitMQ server for tasks. A compute worker can be given a special queue to listen to, or listen to the default queue. For more information on setting up a custom queue and compute worker, see:

- [Queue Management](#)
- [Compute Worker Management and Setup](#)

4.5.3 Submission Container

The submission container is the container that participant's submissions get ran in. The image used to create this container is either the Codabench default if the organizer's haven't specified an image, or the custom image they specified in the competition. The default docker image is `codalab/codalab-legacy:py37`. Organizers can specify their own image using either the [YAML file](#) or the [editor](#).

This container is also created with some specific directories, some of which are only available at specific steps of the run. For example, generally for a submission there are 2 steps. The prediction step (If the submission needs to make predictions) and the scoring step, where the predictions are scored against the truth reference data.

Here are the following directories:

- `/app/input_data` Where input data will be (Only exists if input data is supplied for the task)
- `/app/output` Where all submission output should go (Should always exist)
- `/app/ingestion_program` Where the ingestion program files should exist (Only available in ingestion)
- `/app/program` Where the scoring program and/or the ingestion program should be located (Should always exist)
- `/app/input` Where any input for this step should be. (I.E: Previous predictions from ingestion for scoring. Only exists on scoring step)
- `/app/input/ref` Where the reference data should live (Not available to submissions. Only available on scoring step.)
- `/app/input/res` Where predictions/output from the prediction step should live. (Only available on scoring step)
- `/app/shared` Where any data that needs to be shared between the ingestion program and submission should exist. (Only available on scoring steps.)
- `/app/ingested_program` Where submission code should live if it is a code submission. (Only available in ingestion)

4.6 Backups - Automating Creation and Restoring

Codabench has a custom command that uploads a database backup, and copies it to the storage you are using under `/backups`. We'll see how to execute and automate that command, and how to restore from one of these backups in the event of a failure.

4.6.1 Creating Backups

Create

```
DB_NAME=
DB_USERNAME=
DB_PASSWORD=
DUMP_NAME=
docker exec codabench-db-1 bash -c "PGPASSWORD=$DB_PASSWORD pg_dump -Fc -U $DB_USERNAME $DB_NAME > /app/backups/$DUMP_NAME.dump"
```

Upload

There's a custom command on codabench that we use to upload database backups to storage. It should be accessible from inside the Django container (`docker compose exec django bash`) with `python manage.py upload_backup <backup_path>`. It takes an argument `backup_path` which is the path relative to your backup folder, `codabench/backups` and storage bucket, `/backups`. For instance if I pass it as `2022/$DUMP_NAME.dump`, the backup should happen in `codabench/backups/2022/$DUMP_NAME.dump` and will be uploaded to `/backups/2022/$DUMP_NAME.dump` in your storage bucket.

4.6.2 Scheduling Automatic Backups

To schedule automatic backups, we're going to schedule a daily cronjob. To start, open the cron editor in a shell with `crontab -e`.

Add a new entry like so, with the correct path to `pg_dump.py`:

```
@daily /home/ubuntu/codabench/bin/pg_dump.py
```

You should confirm this backup process works by setting some known cronjob time a few minutes in the future and see the dump in storage.

Once done, save and quit the crontab editor, and verify your changes held by listing out cronjobs with `crontab -l`. You should see your new crontab entry.

4.6.3 Restoring From Backup

Re-install Codabench according to the documentation here: [Codabench Installation](#).

Once Codabench is re-installed and working, we're ready to restore our database backup. Upload the database backup to the webserver. It should go under the `codabench` install folder in the `/backups` directory. For example your path might look like: `/home/users/ubuntu/codabench/backups`

Once the backup is located in the `/backups` folder, you'll want to get into the postgres container (`docker compose exec db bash`). Make sure you know your `DB_NAME`, `DB_USERNAME`, and `DB_PASSWORD` variables from your `.env`.

You can restore two ways. The first would be manually dropping the db, re-creating it, then using `pg_restore` to restore the data:

Inside the database container

```
dropdb $DB_NAME -U $DB_USERNAME
createdb $DB_NAME -U $DB_USERNAME
pg_restore -U $DB_USERNAME -d $DB_NAME -1 /app/backups/<filename>.dump
```

Or, you can let `pg_restore` do that for you with a couple of flags/arguments:

Inside the database container


```
pg_restore --verbose --clean --no-acl --no-owner -h $DB_HOST -U $DB_USERNAME -d $DB_NAME /app/backups/<filename>.dump
```

The arguments `--no-acl` & `--no-owner` may be useful if you're restoring as a non-root user. The owner argument is used for: Do not output commands to set ownership of objects to match the original database.

The ACL argument is for: Prevent dumping of access privileges (grant/revoke commands).

After running `pg_restore` successfully without errors, you should find everything has been restored.

4.7 Submission Process Overview

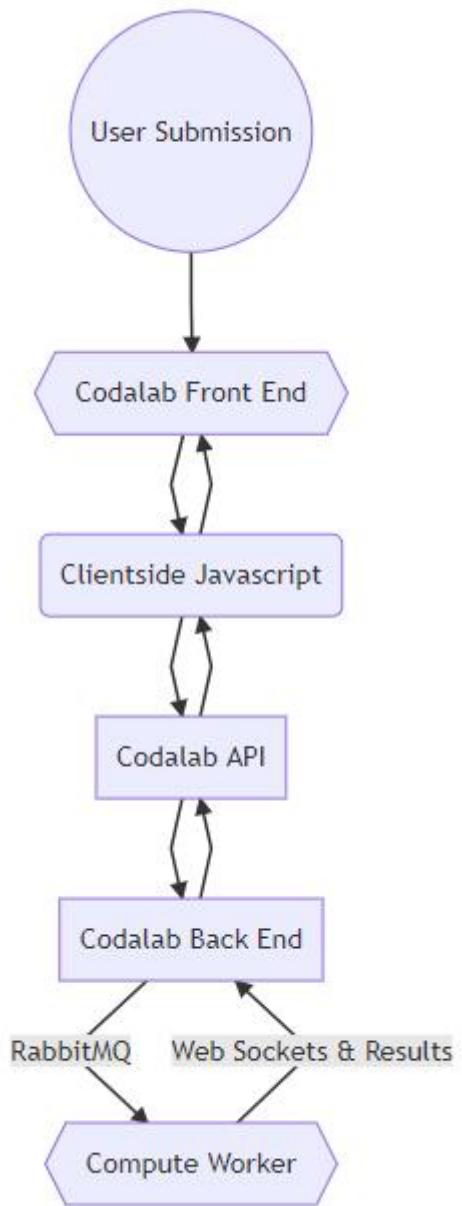

Source:

```

graph TD
    A((User Submission))
    B{{Codalab Front End}}
    C(Clientside Javascript)
    D[Codalab API]
    E[Codalab Back End]
    F{{Compute Worker}}
    G[RabbitMQ]
    H[Web Sockets & Results]

    A --> B
    B --> C
    C --> B
    C --> D
    D --> E
    D --> G
    D --> H
    E --> F
  
```

```
E-->|RabbitMQ|F
F-->|Web Sockets & Results|E
```

4.7.1 Overview:

- When making a submission to Codabench, the website uses a client-side javascript to send the submission file along with proper details to an API point for submissions.
- Once the API receives the new submission, Codabench's back-end fires off a Celery task through RabbitMQ.
- This task is picked up by a Codabench Compute Worker listening in on the associated RabbitMQ. The Compute Worker starts processing the data.
- The compute worker begins execution by creating the container the submission will run in using the organizer's specified docker image for the competition.
- Once the container is created, the scoring program and other necessary organizer and user supplied binaries are executed to produce results. While the submission is processing, communication back to the Codabench instance is possible through web-sockets.
- Once the submission is done processing, it moves the output to the proper folders, and the compute worker posts these scores (if found) to the Codabench API.
- From here, the submission is done processing and is marked as failed/finished. If at any part of the processing step (Scoring/Ingestion step of the submission) an exception is raised, the compute worker will halt and send all current output.

4.8 Robot Submissions

This script is designed to test the Robot Submissions feature. Robot users should be able to submit to bot-enabled competitions without being admitted as a participant.

This article will explain how to make a robot submission on your local computer, and how to present the results on the Leaderboard.

4.8.1 Pre-requisite

- Python 3
- Demo bundle: autowsl
- Github download [URL](#)

 code_submission	add new bundle for autowsl	1 minute ago
 dataset_submission	add new bundle for autowsl	1 minute ago

- Robot submission sample script here: [link](#)

Brief description for demo bundle:

- `code_submission` : It contains the sample bundle for the code submission and the code solution for the submission.
- `auto_wsl_code_submission.zip` : This bundle is used for making submission.
- `new_v18_code_mul_mul.zip` : The bundle is multiple phases, each phase has multiple tasks, and between these tasks, they share the same scoring program, that is, there is no need to copy multiple scoring program for hardcore.
- `new_v18_code_mul_mul_sep_scoring.zip` : This bundle is multiple phases, multiple tasks under each phase share a scoring program that is exclusive to their particular phase.
- `new_v18_code_sin_mul.zip` : This is the sample bundle of a single phase multi-task that shares the same scoring program.

 auto_wsl_code_submission.zip	[Update]: add dataset submission sample bundle for AutoWSL competition	2 months ago
 new_v18_code_mul_mul.zip	add new bundle for autowsl	4 minutes ago
 new_v18_code_mul_mul_sep_scoring.zip	add new bundle for autowsl	4 minutes ago
 new_v18_code_sin_mul.zip	add new bundle for autowsl	4 minutes ago


- `dataset_submission` : It contains the sample bundle for data submission and the corresponding dataset solution for submission.
- `AutoWSL_dataset_submission.zip` : This is the bundle used for dataset submissions.
- `new_v18_dataset_mul_mul.zip` : This is a multi-phase, each phase has multiple tasks below the sample bundle, multiple tasks, using the same scoring program, do not need to copy multiple scoring program for hardcore
- `new_v18_dataset_mul_mul_sep_scoring.zip` : This is a multi-phase, each phase has multiple tasks below the sample bundle, the task between the different phases, using a different scoring program, that is, each phase has its own independent scoring program.
- `new_v18_dataset_sin_mul.zip` : This is a sample bundle of single-phase multi-task commit datasets.

 AutoWSL_dataset_submission.zip	[Update]: add dataset submission sample bundle for AutoWSL competition	2 months ago
 new_v18_dataset_mul_mul.zip	add new bundle for autowsl	11 minutes ago
 new_v18_dataset_mul_mul_sep_scoring.zip	add new bundle for autowsl	11 minutes ago
 new_v18_dataset_sin_mul.zip	add new bundle for autowsl	11 minutes ago

4.8.2 Getting started


Upload a bundle

Use the sample bundle provided above to upload the bundle and create a competition

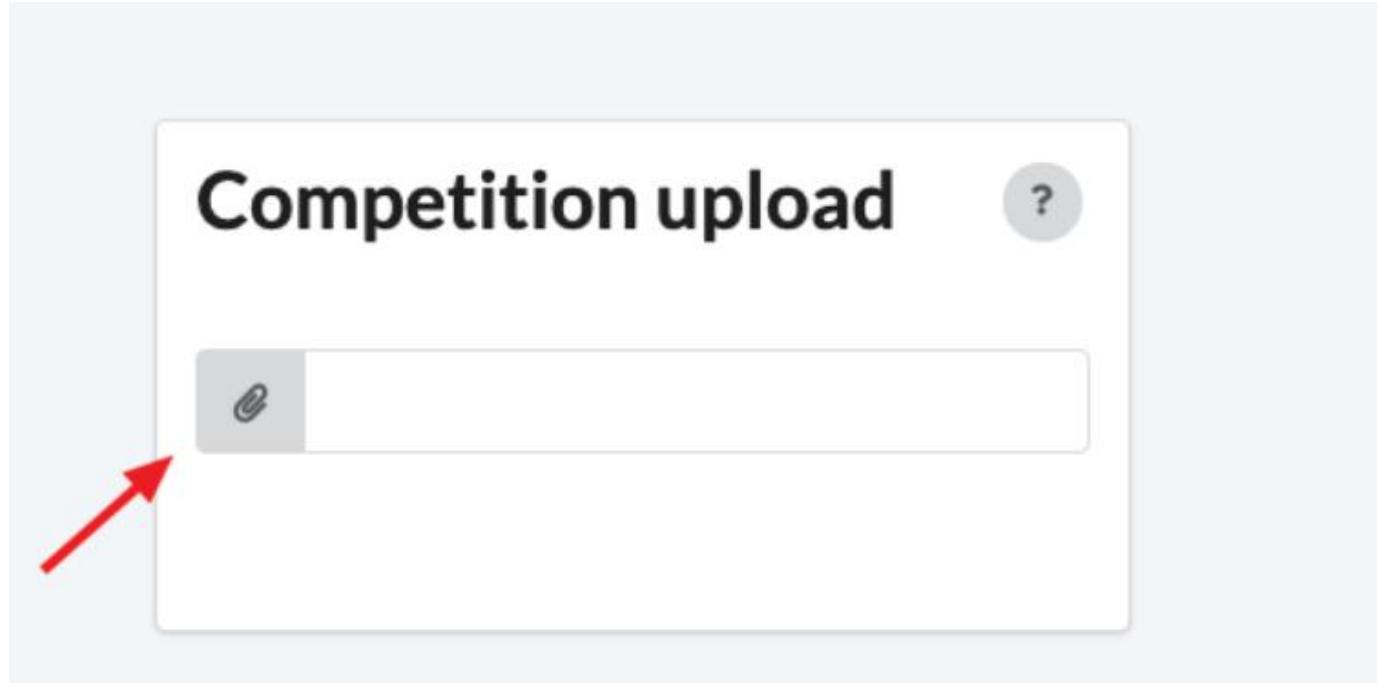


Set the competition to allow robot submissions

On the created competition page, click the EDIT button

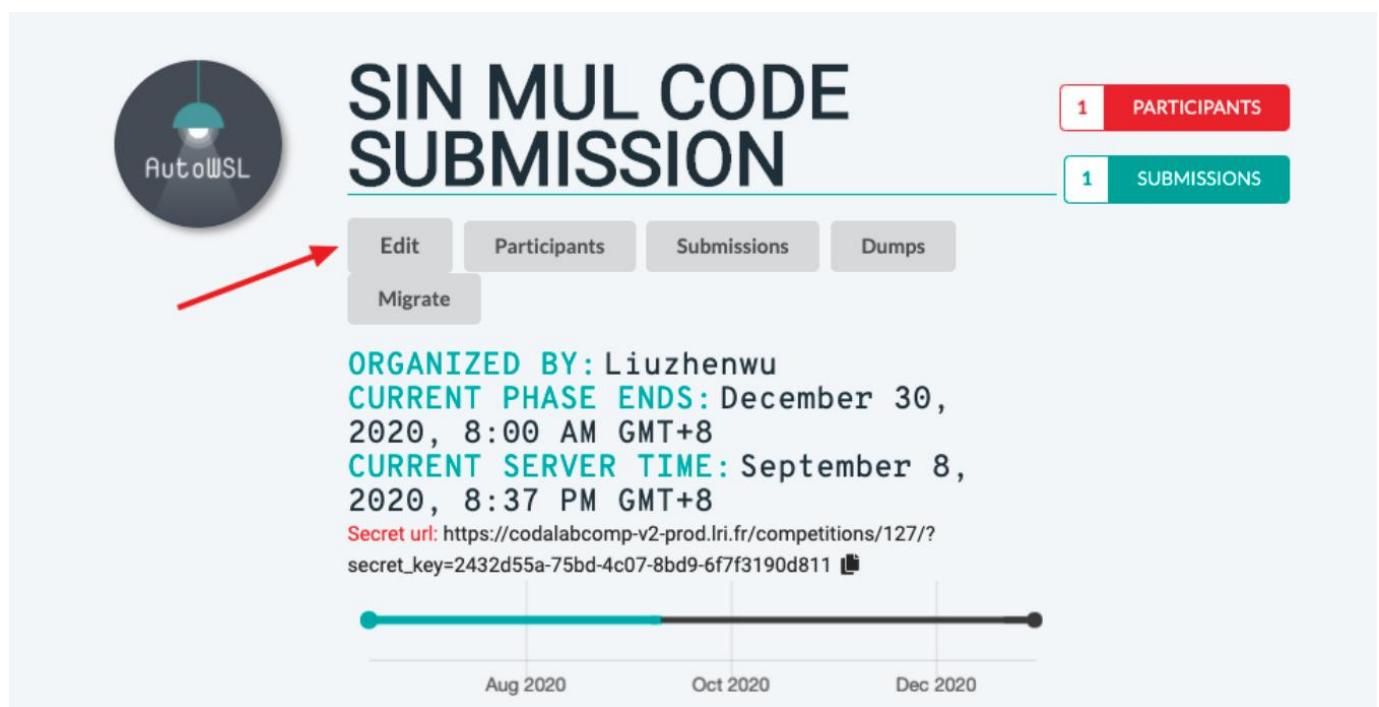

Then click on the Participation tab, then scroll down to the bottom and click on Allow robot submission and click SAVE button.

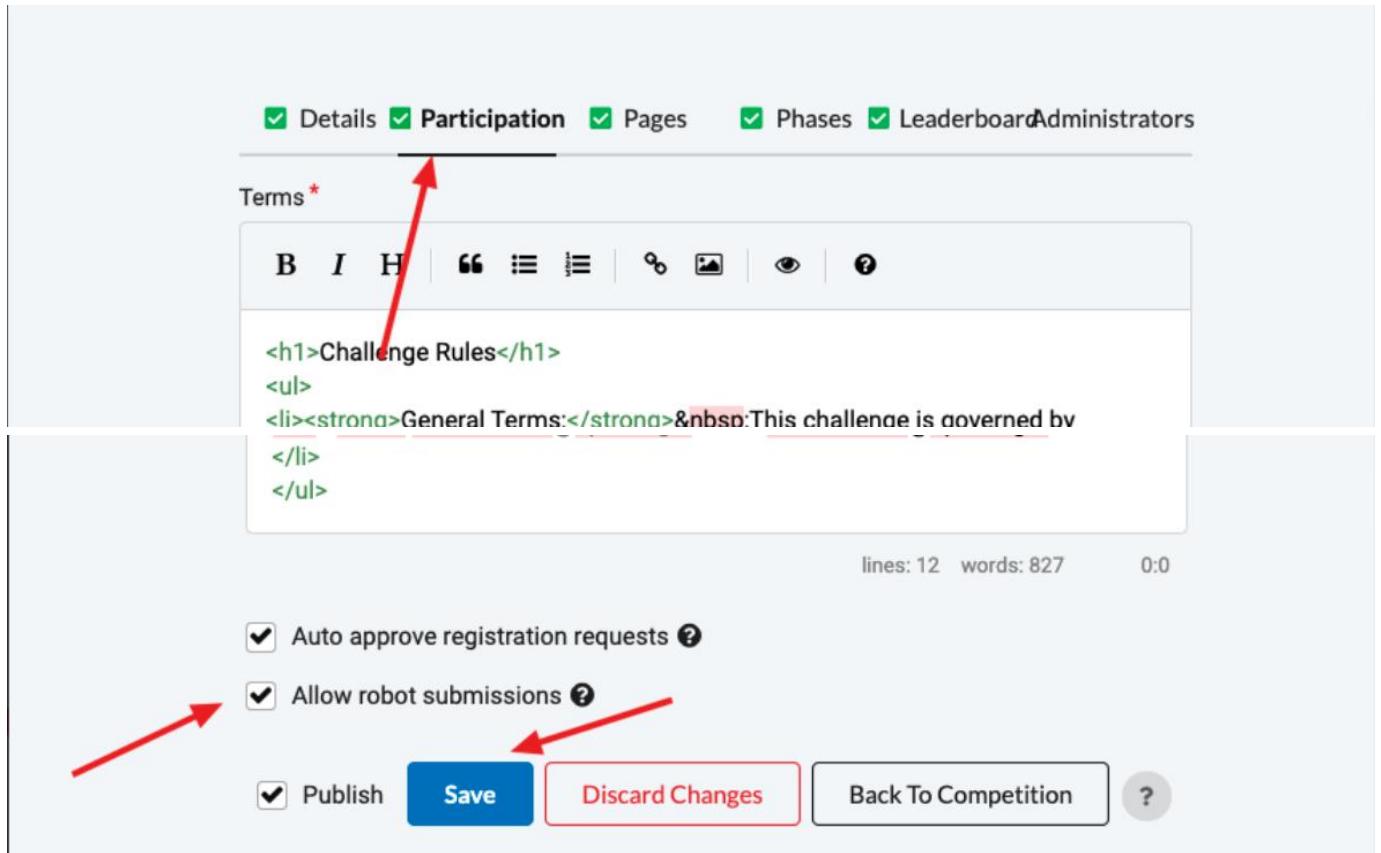

The screenshot shows the 'Participation' tab selected in the top navigation bar. The 'Terms' section contains a rich text editor with a toolbar and the following content:

```
<h1>Challenge Rules</h1>
<ul>
<li><strong>General Terms:</strong> This challenge is governed by</li>
</ul>
```

Below the editor, the text 'lines: 12 words: 827 0:0' is displayed. At the bottom, there are several configuration checkboxes:

- Auto approve registration requests ?
- Allow robot submissions ?

Below these checkboxes are three buttons: 'Publish' (unchecked), 'Save' (blue), 'Discard Changes' (red), 'Back To Competition', and a help icon.

After the above steps are done, the Competition is allowed for making robot submission.

Set yourself to Is bot

Go to the backend administration page, PROFILES tab bar below the user

PROFILES

Users 

Is active

Is staff

Rabbitmq queue limit:


Rabbitmq username:

Rabbitmq password:

Is bot 

Delete 

Save and add another **Save and continue editing** **SAVE**

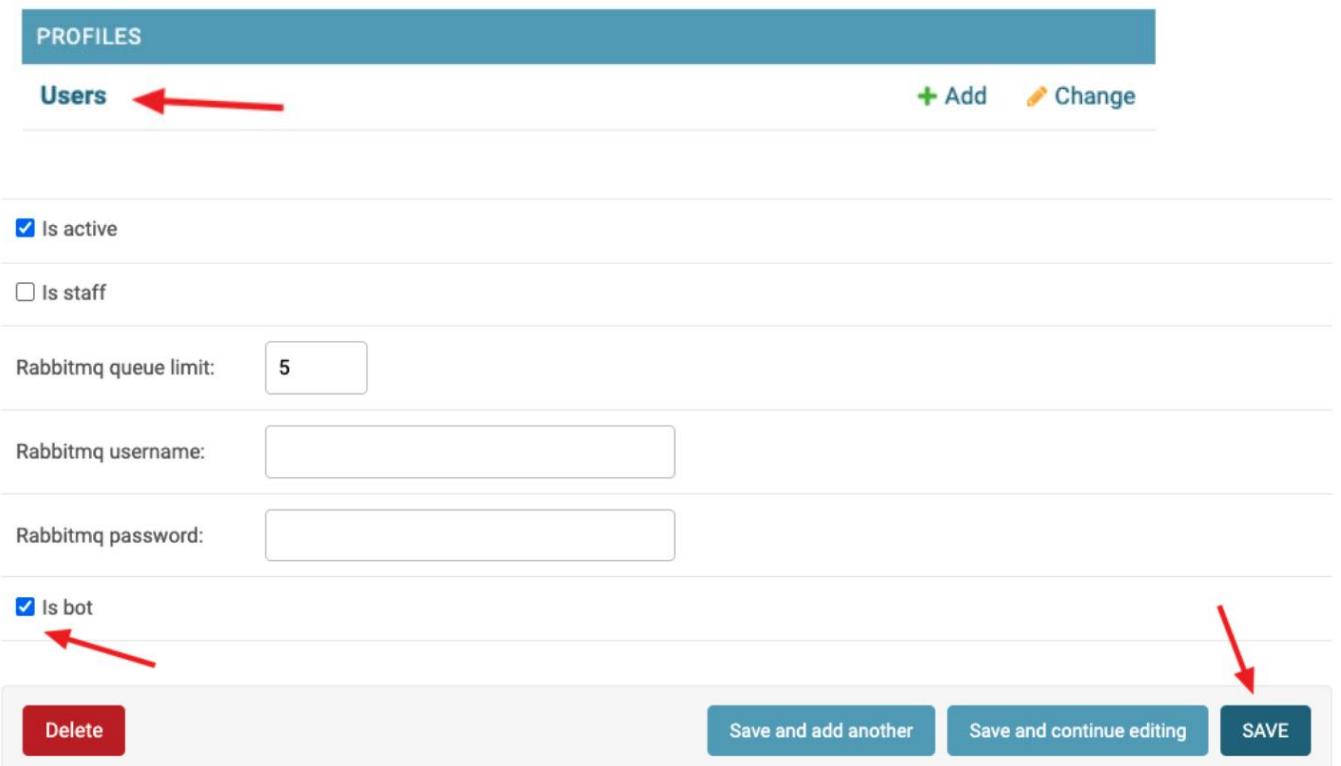

Check the `is bot` box, click save. You can now proceed with your robot submissions.

Change CODALAB_URL address

Change CODALAB_URL address in following scripts: `get_competition_details.py`, `example_submission.py`, `get_submission_details.py`
`CODALAB_URL = 'https://www.codabench.org/'`

Find scripts at `docs/example_scripts`

Choose the competition

Run the following command on the command line: `python3 get_competition_details.py` What you're about to see is something like this

```
zhliu@zhlius-MacBook-Pro: ~/Desktop
~/Desktop (zsh)
(base) → Desktop python3 get_competition_details.py

----- Competitions -----
id | creator | name
---|---|---
1 | eric | Classify Wheat Seeds
2 | eric | Classify Wheat Seeds
3 | eric | Sample Competition
4 | eric | Sample Competition
5 | eric | Learning to Run a Power Network
6 | tthomas63 | Microscopy Challenge - Data Science Africa 2019
7 | tthomas63 | Sample time series competition
8 | tthomas63 | Health Data Challenge
9 | tthomas63 | Iris
10 | tthomas63 | Learning to Run a Power Network
11 | jimmy | Classify Wheat Seeds (result submission)
12 | tthomas63 | Classify Wheat Seeds W/Queue
13 | tthomas63 | Classify Wheat Seeds W/O Queue
14 | jimmy | Classify Wheat Seeds
15 | iguyon | See4C challenge
16 | iguyon | ChaLearn Fast Causation Coefficient Challenge
17 | iguyon | Sample Competition
18 | iguyon | Classify Wheat Seeds
19 | tthomas63 | Classify Wheat Seeds
20 | tthomas63 | Classify Wheat Seeds
21 | tthomas63 | Classify Wheat Seeds
22 | tthomas63 | Classify Wheat Seeds
23 | test-user2019 | Classify Wheat Seeds
24 | test-user2019 | Classify Wheat Seeds
25 | iguyon | Learning to Run a Power Network
26 | iguyon | IRIS Competition
27 | pavao | To be, or not to be?
28 | pavao | Chems v2.2
29 | pavao | Classify Wheat Seeds
30 | pavao | autowsl
31 | pavao | Iris
32 | pavao | Heart Attack - Causality Challenge
33 | tthomas63 | Iris
34 | liushouxiang | Malaria detection challenge
35 | pavao | Malaria detection challenge - Raw dataset
36 | pavao | To be, or not to be?
37 | eric | Classify Wheat Seeds
38 | iguyon | IRIS Competition directly from V2 bundle
39 | stellarlau | Classify Wheat Seeds
40 | iguyon | Classify Wheat Seeds
41 | Zhen | Classify Wheat Seeds
42 | liuzhenwu | Classify Wheat Seeds - Single phase with multiple task
```

Choose the ID of the competition you are interested in, for example 127.

126	liuzhenwu	AUTOWSL Challenge Single Phase
127	liuzhenwu	SIN MUL CODE SUBMISSION
128	liuzhenwu	Mul-Mul-Code Submission

Run the script again with the competition ID as a parameter `python3 get_competition_details.py 127` Then you will see the following

```
(base) ➔ Desktop python3 get_competition_details.py 127

Competition: SIN MUL CODE SUBMISSION

----- Phases -----
 id | name
-----
 215 | Single Phase with Multiple Task
```

You can select the phase ID you're interested in, then use it as the second argument and run the script again, this time you'll get the task information associated with that phase. `python3 get_competition_details.py 127 215`

```
(base) ➔ Desktop python3 get_competition_details.py 127 215

Competition: Single Phase with Multiple Task

----- Tasks -----
 id | name
-----
 289 | First Task
 290 | Second Task
 291 | Third Task
```

Making submission

Inside the `example_submission.py` script, configure these options:

```
8  # -----
9  # Configure these
0  # -----
1  CODALAB_URL = 'https://codalabcomp-v2-prod.lri.fr/'
2  USERNAME = 'zhliu'
3  PASSWORD = 'zhliu'
4  PHASE_ID = 215
5  TASK_LIST = []
6  SUBMISSION_ZIP_PATH = '/Users/zhliu/Desktop/auto_wsl_code_submission.zip'
7
```

- `CODALAB_URL` can be changed if not testing locally.
- `USERNAME` and `PASSWORD` should correspond with the user being tested.
- `PHASE_ID` should correspond with the phase being tested on.
- `TASK_LIST` can be used to submit to specific tasks on a phase. If left blank, the submission will run on all tasks.
- `SUBMISSION_ZIP_PATH` You can fill in the absolute path of the submission directly.

```
The idea here is that I'm going to test all the tasks below the competition with phase ID 215. Then run the script. python3 example_submission.py
(base) ➔ Desktop python3 example_submission.py
Making submission using data: {'phase': 215, 'tasks': [], 'data': '141187e5-1a57-4910-9ab8-bc4ee21949af'}
Successfully submitted: b'{"id":542,"data":"141187e5-1a57-4910-9ab8-bc4ee21949af","phase":215,"status":"Submitting","status_details":null,"filename":"submission.zip","description":"","md5":null}'
(base) ➔ Desktop
```

You can see that you have successfully submitted the submission bundle.

View submission details

Configure the `get_submission_details.py` options before running.

```
29
30  # -----
31  # Configure these
32  #
33 CODALAB_URL = 'https://codalabcomp-v2-prod.lri.fr/'
34 USERNAME = 'liuzhenwu'
35 PASSWORD = 'XXXXXXXXXX'
36
```

- `CODALAB_URL` can be changed if not testing locally.
- `USERNAME` and `PASSWORD` should correspond with the user being tested. Run the `get_submission_details.py` script with the ID of the phase containing the desired submission as the first argument.


Since we chose 215 for our phase ID above, we'll choose 215 here.

Then run the script. `python3 get_submission_details.py 215`

```
(base) ➔ Desktop python3 get_submission_details.py 215
----- Submissions -----
  id | creator           | creation date
  --+-----+-----+
  464 | liuzhenwu        | 2020-09-01T10:28:01.745620Z
  465 | liuzhenwu        | 2020-09-01T10:28:01.800481Z
  466 | liuzhenwu        | 2020-09-01T10:28:01.821579Z
  467 | liuzhenwu        | 2020-09-01T10:28:01.827409Z
  542 | liuzhenwu        | 2020-09-08T13:07:44.733999Z
  543 | liuzhenwu        | 2020-09-08T13:07:44.997421Z
  544 | liuzhenwu        | 2020-09-08T13:07:45.019076Z
  545 | liuzhenwu        | 2020-09-08T13:07:45.028028Z
```

Find the ID of the desired submission. For example, 542.

Then run the script. `python3 get_submission_details.py 215 542`

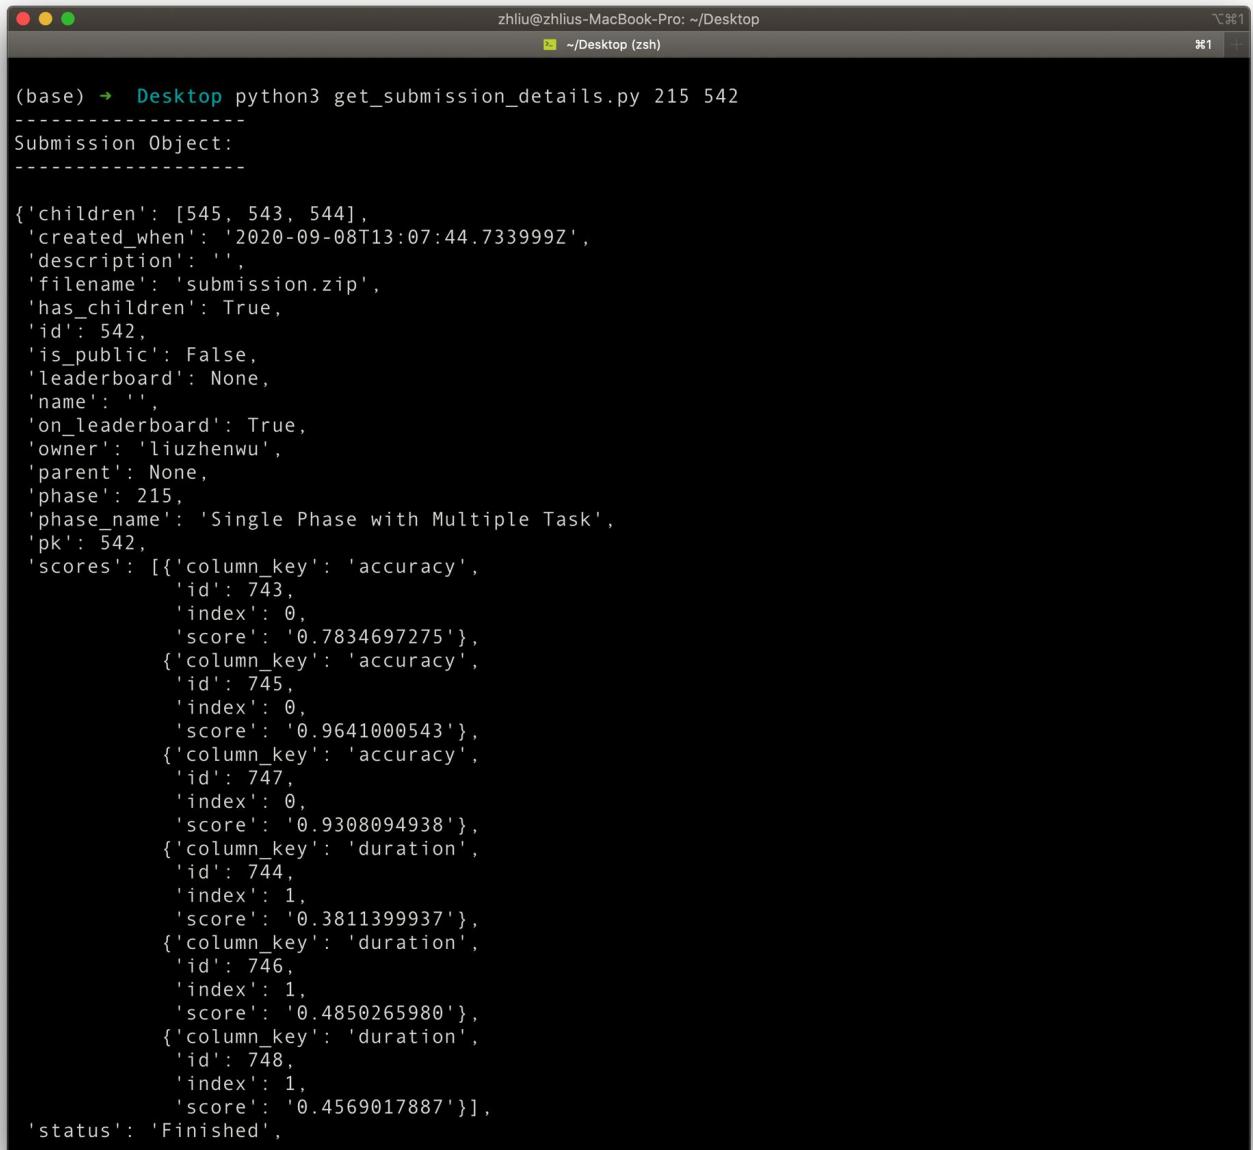

```
zhliu@zhlius-MacBook-Pro: ~/Desktop
~/Desktop (zsh)

(base) → Desktop python3 get_submission_details.py 215 542
-----
Submission Object:
-----
{'children': [545, 543, 544],
 'created_when': '2020-09-08T13:07:44.733999Z',
 'description': '',
 'filename': 'submission.zip',
 'has_children': True,
 'id': 542,
 'is_public': False,
 'leaderboard': None,
 'name': '',
 'on_leaderboard': True,
 'owner': 'liuzhenwu',
 'parent': None,
 'phase': 215,
 'phase_name': 'Single Phase with Multiple Task',
 'pk': 542,
 'scores': [{"column_key": "accuracy",
   'id': 743,
   'index': 0,
   'score': '0.7834697275'},
  {"column_key": "accuracy",
   'id': 745,
   'index': 0,
   'score': '0.9641000543'},
  {"column_key": "accuracy",
   'id': 747,
   'index': 0,
   'score': '0.9308094938'},
  {"column_key": "duration",
   'id': 744,
   'index': 1,
   'score': '0.3811399937'},
  {"column_key": "duration",
   'id': 746,
   'index': 1,
   'score': '0.4850265980'},
  {"column_key": "duration",
   'id': 748,
   'index': 1,
   'score': '0.4569017887'}],
 'status': 'Finished'}
```

Finally

Finally, you can go to the competition page, add your submission, and add it to the Leaderboard!

SIN MUL CODE SUBMISSION

ORGANIZED BY: Liuzhenwu
CURRENT PHASE ENDS: December 30, 2020, 8:00 AM GMT+8
CURRENT SERVER TIME: September 8, 2020, 9:13 PM GMT+8
Secret url: https://codalabcomp-v2-prod.iri.fr/competitions/127/?secret_key=2432d55a-75bd-4c07-8bd9-6f7f3190d811

Aug 2020 Oct 2020 Dec 2020


Get Started Phases **My Submissions** Results ?

Single Phase with Multiple Task

Submission upload

ID #	File name	Status	Actions
542	submission.zip	Finished	✓
464	code_submission.zip	Finished	

On the Leaderboard, you can see the score details of each of your tasks.

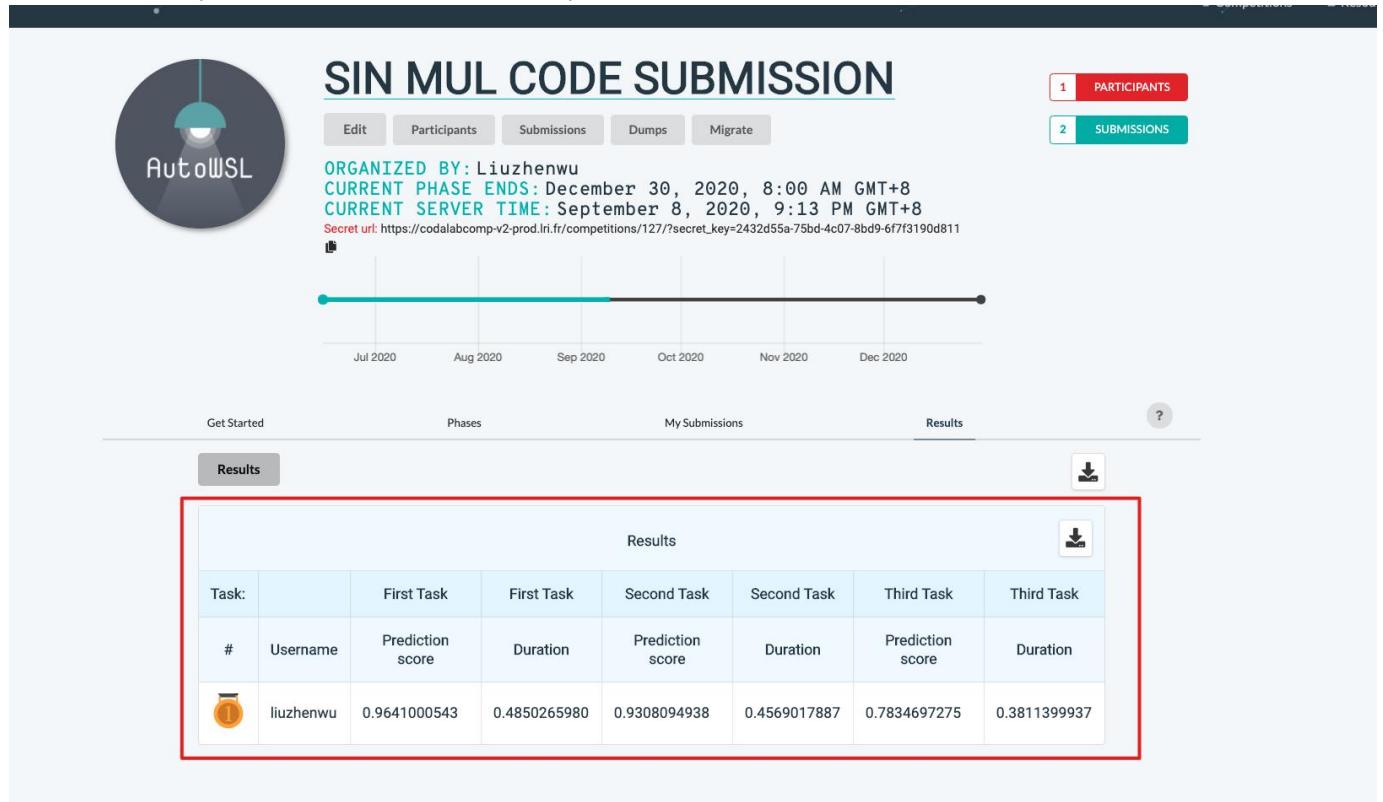

The screenshot shows the competition page for "SIN MUL CODE SUBMISSION". The page includes a logo for "AutoWSL", navigation tabs for "Edit", "Participants", "Submissions", "Dumps", and "Migrate", and a timeline from July 2020 to December 2020. The "Submissions" tab is selected, showing 1 participant and 2 submissions. The results table is highlighted with a red border and contains the following data:


Task:	First Task	First Task	Second Task	Second Task	Third Task	Third Task	
#	Username	Prediction score	Duration	Prediction score	Duration	Prediction score	Duration
1	liuzhenwu	0.9641000543	0.4850265980	0.9308094938	0.4569017887	0.7834697275	0.3811399937

4.8.3 Using the Scripts:

Setup:

- Create a competition with robot submissions enabled

[Example competition bundle](#)

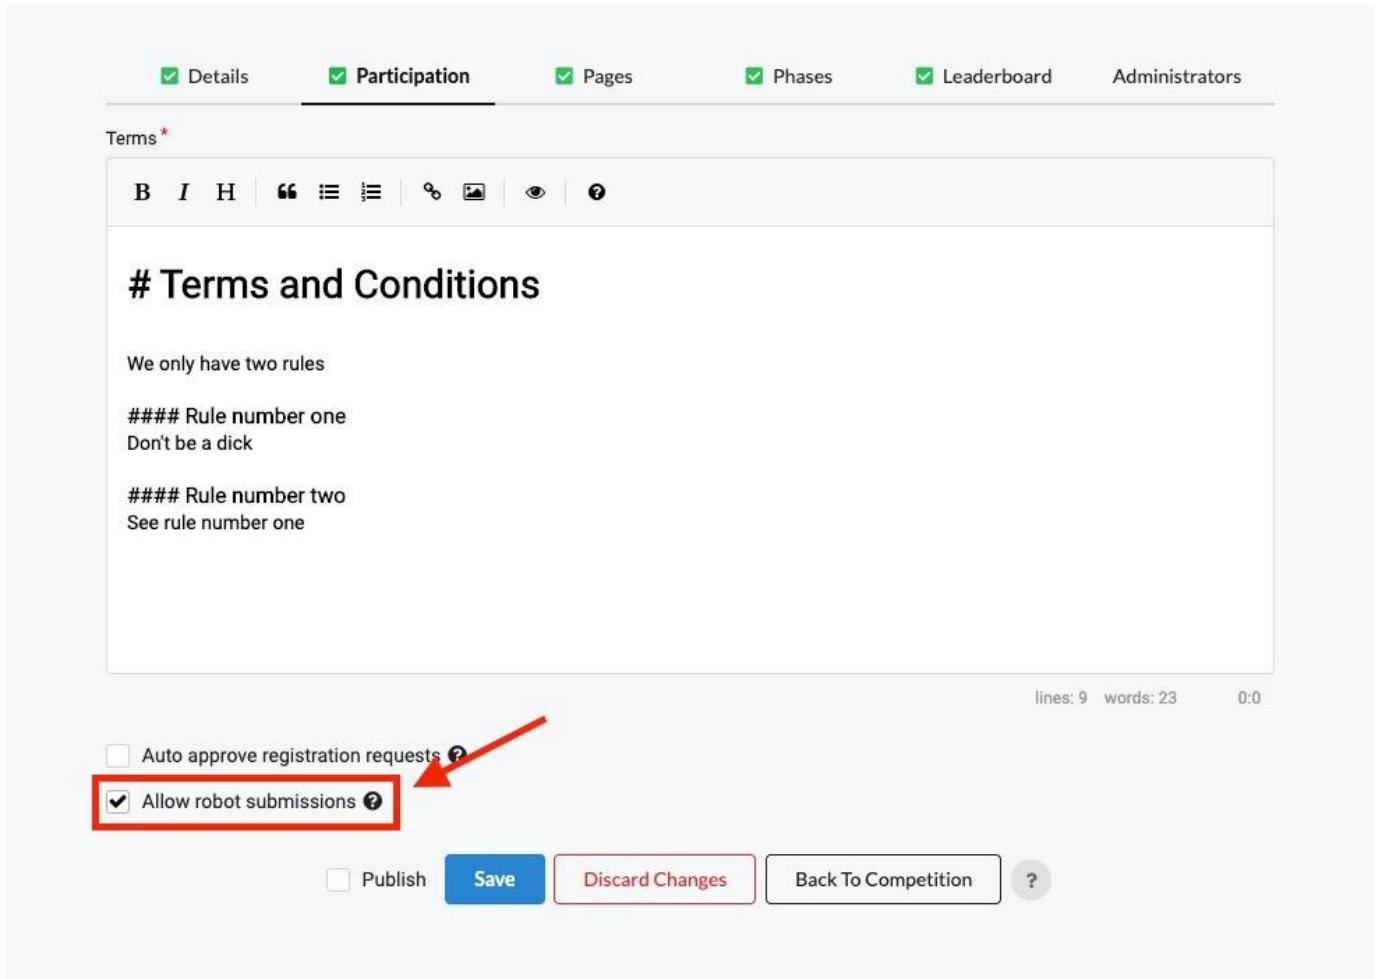

Details Participation Pages Phases Leaderboard Administrators

Terms*

B I H | “ ≡ ≡ | % 📸 | ⚡ | ?

Terms and Conditions

We only have two rules

Rule number one
Don't be a dick

Rule number two
See rule number one

lines: 9 words: 23 0:0

Auto approve registration requests ?

Allow robot submissions ?

Publish **Save** Discard Changes Back To Competition ?

- Create a user and enable the bot user flag on the Django admin page.

Username: botty

Email: bot@bot.com

Date joined: Date: 2020-07-14 Today |

Time: 21:33:54 Now |

Note: You are 7 hours behind server time.

Is active

Is staff

Rabbitmq queue limit: 5

Rabbitmq username:

Rabbitmq password:

Is bot

Delete **Save and add another** **Save and continue editing** **SAVE**

get_competition_details.py:

- Inside the `get_competition_details.py` script, configure these options:

```

33  # -----
34  # Configure this
35  # -----
36  CODALAB_URL = 'http://localhost/'
```

- `CODALAB_URL` can be changed if not testing locally.
- Run the `get_competition_details` script with no arguments.
- Find the competition you want to test on.
- Run the `get_competition_details` script again with the competition ID as the only argument.
- Find the phase you want to test on.
- If you want to use the task selection feature, run the script again with the competition ID as the first argument and the phase ID as the second argument.
- Select the task you would like to run your submission on.
- Use the phase ID and task IDs to configure `example_submission.py`.

example_submission.py:

- Inside the `example_submission.py` script, configure these options:

```

28  # -----
29  # Configure these
30  # -----
31  CODALAB_URL = 'http://localhost/'
32  USERNAME = 'admin'
33  PASSWORD = 'admin'
34  PHASE_ID = None
35  TASK_LIST = []
36  SUBMISSION_ZIP_PATH = '../tests/functional/test_files/submission.zip'
```

- `CODALAB_URL` can be changed if not testing locally.
- `USERNAME` and `PASSWORD` should correspond with the user being tested.
- `PHASE_ID` should correspond with the phase being tested on.
- `TASK_LIST` can be used to submit to specific tasks on a phase. If left blank, the submission will run on all tasks.
- `SUBMISSION_ZIP_PATH` should be changed if testing on anything but the default "Classify Wheat Seeds" competition. An example submission can be found [here](#).
- Run this script in a `python3` environment with `requests` library installed.

get_submission_details.py

- Configure the `get_submission_details.py` options before running.

```

30      # -----
31      # Configure these
32      # -----
33      CODALAB_URL = 'http://localhost/'
34      USERNAME = 'admin'
35      PASSWORD = 'admin'

```

- `CODALAB_URL` can be changed if not testing locally.
- `USERNAME` and `PASSWORD` should correspond with the user being tested.
- Run the `get_submission_details.py --phase <id>` script with the ID of the phase containing the desired submission.
- Find the ID of the desired submission.
- Run the `get_submission_details.py --submission <id>` script with the desired submission ID.
- The output of the script should be a submission object and a submission `get_details` object. This data can be used view scores, get prediction results, ect.
- Run the `get_submission_details.py --submission <id> -v` to save a zip containing previous info plus the original submission and logs.
- `--output <PATH>` can be used to choose where to save the zip file. Otherwise, it will be saved in the current directory.

`rerun_submission.py`

Robot users have the unique permission to rerun anyone's submission on a specific task. This enables clinicians to test pre-made solutions on private datasets that exist on tasks that have no competition.

- Configure the `rerun_submission.py` options before running.

```

30      # -----
31      # Configure these
32      # -----
33      CODALAB_URL = 'http://localhost/'
34      USERNAME = 'admin'
35      PASSWORD = 'admin'

```

- `CODALAB_URL` can be changed if not testing locally.
- `USERNAME` and `PASSWORD` should correspond with the user being tested.

Running the script

1. Create a competition that allows robots, and create a user marked as a robot user. Use that username and password below.
2. Get into a python3 environment with requests installed
3. Review this script and edit the applicable variables, like...

```

CODALAB_URL
USERNAME
PASSWORD
...

```

4. Execute the contents of this script with no additional command line arguments with the command shown below:

```
./rerun_submission.py
```

The script is built to assist the user in the selection of the submission that will be re-run.

1. After selecting a submission ID from the list shown in the previous step, add that ID to the command as a positional argument as shown below.

```
./rerun_submission.py 42
```

The script will assist the user in the selection of a task ID.

1. After selecting both a submission ID and a task ID, run the command again with both arguments to see a demonstration of a robot user re-running a submission on a specific task.

e.g.

```
./rerun_submission.py 42 a217a322-6ddf-400c-ac7d-336a42863724
```

4.9 Running Tests

```
# Without "end to end" tests
$ docker compose exec django py.test -m "not e2e"

# "End to end tests" (a shell script to launch a selenium docker container)
$ ./run_selenium_tests.sh

# If you are on Mac OSX it is easy to watch these tests, no need to install
# anything just do:
$ open vnc://0.0.0.0:5900

# And login with password "secret"
```

4.9.1 CircleCI

To simulate the tests run by CircleCI locally, run the following command:

```
docker compose -f docker-compose.yml -f docker-compose.selenium.yml exec django py.test src/ -m "not e2e"
```

4.9.2 Example competitions

The repo comes with a couple examples that are used during tests:

v2 test data

```
src/tests/functional/test_files/submission.zip
src/tests/functional/test_files/competition.zip
```

v1.5 legacy test data

```
src/tests/functional/test_files/submission15.zip
src/tests/functional/test_files/competition15.zip
```

Other Codalab Competition examples

<https://github.com/codalab/competition-examples/tree/master/v2/>

4.10 Automation

4.10.1 What and Why

It's useful to test various parts of the system with lots of data or many intricate actions. The selenium tests do this generally and are used as a guide for this tutorial. One problem is that Selenium needs to launch an instance of a browser to control. Our tests do this inside a docker container and uses a test database that doesn't persist as it cleans up after itself. We need to be able to control a live codabench session that is running. To do that we install a driver locally which is normally only inside the selenium docker container during tests. It is specific to your browser so keep that in mind.

4.10.2 Virtualenv

You'll need a python virtual env as you don't want to be inside Django or you won't be able to launch a browser.

Virtualenv

I used 3.8.

```
python3 -m venv codabench
source ./codabench/bin/activate
```

Pyenv

```
pyenv install 3.8
pyenv virtualenv 3.8 codabench
pyenv activate codabench
```

4.10.3 Requirements

We have a couple extra things like `webdriver-manager` for getting a driver programmatically and `selenium` needs to be upgraded to use modern client interface.

```
pip install -r requirements.txt
pip install -r requirements.dev.txt
pip install webdriver-manager
pip install --upgrade selenium
```

4.10.4 Automate competition creation

Main Selenium Docs

Install

Getting Started

```
import os, time
from selenium import webdriver
from selenium.webdriver.common.by import By
from selenium.webdriver.chrome.service import Service
from webdriver_manager.chrome import ChromeDriverManager

# Use `ChromeDriverManager` to ensure the `chromedriver` is installed and in PATH
service = Service(ChromeDriverManager().install())
driver = webdriver.Chrome(service=service)

# ... now use `driver` to control the local Chrome instance
driver.get("http://localhost/accounts/login")

# Use CSS selectors to find the input fields and button
username_input = driver.find_element(By.CSS_SELECTOR, 'input[name="username"]')
password_input = driver.find_element(By.CSS_SELECTOR, 'input[name="password"]')
submit_button = driver.find_element(By.CSS_SELECTOR, '.submit.button')

# Type the credentials into the fields
username_input.send_keys('bbearce')
password_input.send_keys('testtest')

# Click the submit button
submit_button.click()
```

```
comp_path = "/home/bbearce/Documents/codabench/src/tests/functional/test_files/competition_v2_multi_task.zip"
def upload_competition(competition_zip_path):
    driver.get("http://localhost/competitions/upload")
    file_input = driver.find_element(By.CSS_SELECTOR, 'input[ref="file_input"]')
    file_input.send_keys(os.path.join(competition_zip_path))

for i in range(30):
    upload_competition(comp_path)
    time.sleep(5) # tune for your system
```

4.11 Manual Validation

This is a checklist to follow in order to perform a manual validation of the platform's proper functioning. This is especially useful when validating a "bump" pull request made by the dependabot, a fresh installation or any change in the code base.

1. Create a user account and login
2. Create a competition
3. Create a queue
4. Upload a submission
5. Check that the submission was processed (results, visualization tab, leaderboard)
6. Change/recover password
7. Delete user
8. Delete submission
9. Delete queue
10. Delete competition
11. Admin page
12. Look at the logs for any problematic messages (`docker compose logs -f`)

4.12 Validation and deployment of pull requests

4.12.1 1. Local testing and validation of the changes

Setup

Required: - "Maintain" role on the repository - A working local installation

Pull the changes, checkout the branch you are testing and deploy your local instance:

```
cd codabench
git pull
git checkout branch
docker compose up -d
```

If necessary, migrate and collect static files (see this [page](#)).

Note

If the branch with the changes is from an external repository, you can create a branch in Codabench's repository and make a first merging into this new branch. Then, you'll be able to merge the new branch into master. This way, the automatic tests will be triggered.

EDIT: It may be possible to trigger the tests even if the branch is external. To be confirmed.

Testing

Here is the usual checklist in order to validate the pull request:

- Code review by me**
- Hand tested by me**
- I'm proud of my work**
- Code review by reviewer**
- Hand tested by reviewer**
- CircleCi tests are passing**
- Ready to merge**

The contributor may have provided guidelines for testing that you should follow. In addition to this:

- Testing must be thorough, really trying to break the new changes. Try as many use cases as possible. Do not trust the contributor.
- In addition to the checklist of the PR, you can follow this checklist to check that the basic functionalities of the platform are still working: [manual validation](#)

Merging

Once everything is validated, merge the pull request. If there are many minor commits, use "squash and merge" to merge them into one.

All checks have passed
1 successful check

This branch has no conflicts with the base branch
Merging can be performed automatically.

Merge pull request ▾ You can also [open this in GitHub Desktop](#) or view [command line instructions](#)

Create a merge commit
All commits from this branch will be added to the base branch via a merge commit.

Squash and merge
The 1 commit from this branch will be added to the base branch.

You can then safely click on `Delete branch`. It is a good practice to keep the project clean.

4.12.2 Update the test server

Here are the necessary steps to update the Codabench server to reflect the last changes. We provide here general guidelines that work for both the test server and the production server.

Log into the server

```
ssh codabench-server
cd /home/codalab/codabench
```

Replace `codabench-server` by your own SSH host setting, or the IP address of the server.

Note

Make sure to log in as the user that deployed the containers.

Pull the last change

Tip

- If you are deploying on a test server, you can use the `develop` branch.
- If you are deploying on a Production server, we strongly advise on using the `master` branch.

```
docker compose down
git status
git pull
docker compose up -d
```

Restart Django

```
docker compose stop django
docker compose rm django
docker compose create django
docker compose start django
```

If `docker compose` does not exist, use `docker-compose`.

Database migration

```
docker compose exec django ./manage.py migrate
```

⚠ Do not use `makemigrations`

 *Remark: we need to solve the migration files configuration. In the meantime, `makemigrations --merge` may be needed.*

Collect static files

```
docker compose exec django ./manage.py collectstatic --noinput
```

Final testing


- Access the platform from your browser
- You may need a hard refresh (Maj + R) so the changes take effect.
- Check that everything is working fine, the new changes, and the basic functionalities of the platform

4.12.3 Merge develop into master

Once some pull requests (~3 - 10) were merged into `develop`, we can prepare a merge into `master`. Simply create a new pull request from Github interface, selecting `master` as the base branch:

Comparing changes


Choose two branches to see what's changed or to start a new pull request

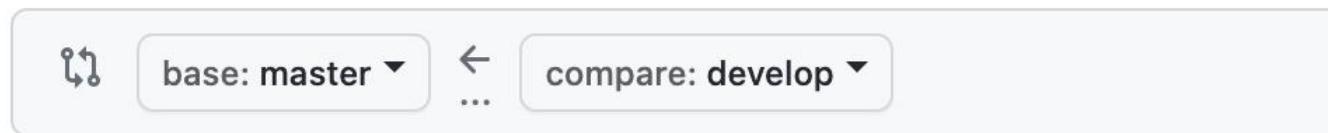

In the text of the PR, link all relevant PR made to develop, and indicate the URL of the test server. Example: <https://github.com/codalab/codabench/pull/1166>

4.12.4 Update the production server


Same procedure as [Update the test server](#), but on the production server.

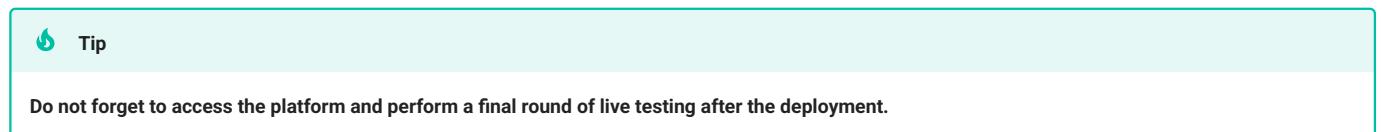


4.12.5 Creating a Release

Once the develop branch has been merged into master, it is possible to use the Github interface to tag the commit of the merge and create a release containing all the changes as well as manual interventions if needed.


For this, you will need to go to the [release page](#) and click on `Draft a new release`

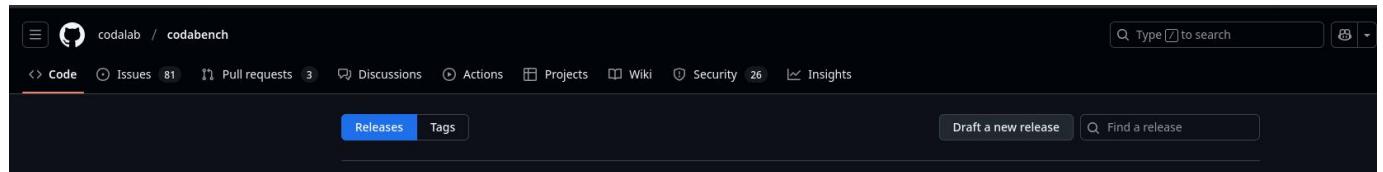

Afterwards, you click on `Choose a tag` and enter the tag you want to create (in this example, 1.17.0 which doesn't exist yet)

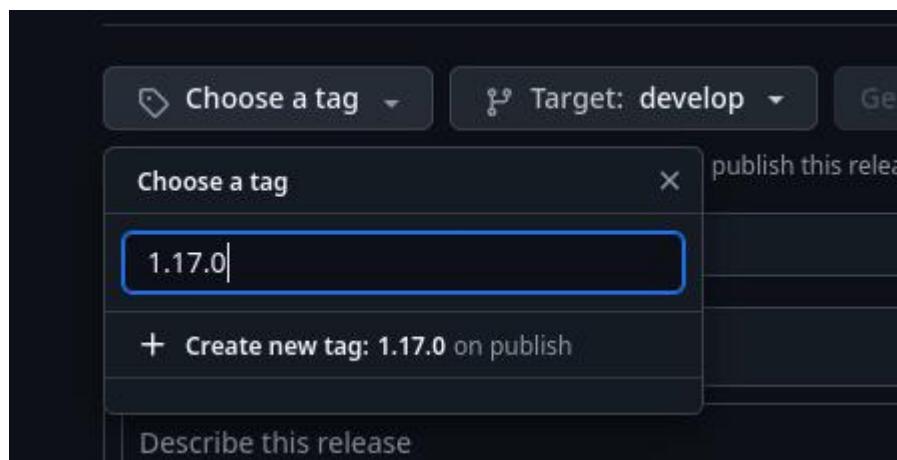


You can then choose the targeted branch to create the tag on (`master` in our case) and then click on `Generate release notes` Github will automatically generate releases based on the new commits compared to the last tag.

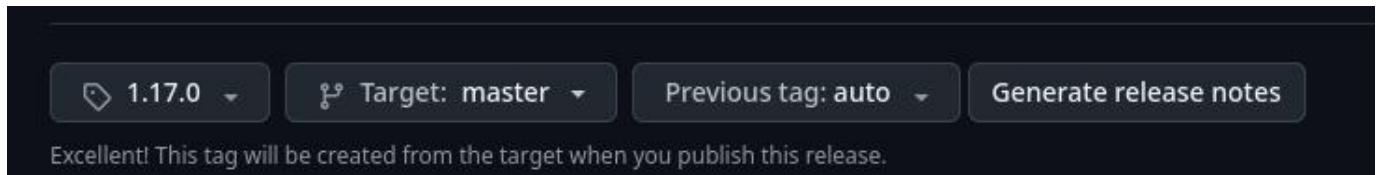

You can then change the text format however you like, as well as add things like Manual Intervention if there are any.

When you are done, you publish the release.

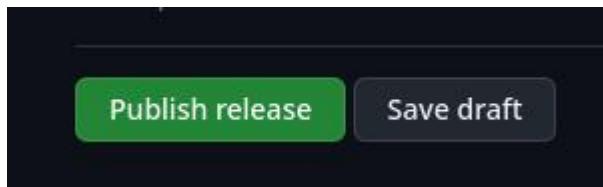

4.12.6 TODO

Add a note about:

- Merging the github action PR to update the release tag

4.13 Upgrading Codabench

4.13.1 Index

Upgrade Codabench

```
cd codabench
git pull
docker compose build && docker compose up -d
docker compose exec django ./manage.py migrate
docker compose exec django ./manage.py collectstatic --noinput
```

Manual interventions

You can find here various manual intervention needed depending on which version you are upgrading from:

- [Upgrade RabbitMQ](#) (version < 1.0.0)
- [Create new logos for each competition](#) (version < 1.4.1)
- [Worker Docker Image manual update](#) (version < 1.3.1)
- [Add line into .env for default queue worker duration](#) (version < 1.7.0)
- [Uncomment a line in your .env file](#) (version < 1.8.0)
- [Rebuilding all docker images](#) (version < 1.9.2)
- [Move the last storage_inconsistency files from logs folder to var logs folder](#) (version < 1.12.0)
- [Submissions and Participants Counts](#) (version < 1.14.0)
- [Homepage counters](#) (version < 1.15.0)
- [User removal](#) (version < 1.17.0)
- [Database size Fix](#) (version < 1.18.0)

4.13.2 Upgrade RabbitMQ (version < 1.0.0)

This intervention is needed when upgrading from a version equal or lower than v1.0.0

Backup RabbitMQ settings

Go to `http://<instance_ip>:<rabbitmq_admin_port>/api/definitions` and save the response (enter login and password as configured in `.env`)

For example:

Do not submit any submission and wait until all submissions are processed

Stop and remove RabbitMQ's container and data

```
docker compose stop rabbit && docker compose rm rabbit  
sudo rm -rf var/rabbit/*
```

Switch to the latest RabbitMQ version

Add `WORKER_CONNECTION_TIMEOUT=<your timeout value>` into your `.env` file with your custom value. Then execute:

```
git pull  
docker compose build rabbit  
docker compose up -d
```

Restore the backup settings

Connect to the instance by ssh and upload your json file at 1st step, execute

```
curl -u <login>:<password> -H "Content-Type: application/json" -X POST -T <your definitions file>.json http://localhost:<rabbit_admin_port>/api/definitions
```

You can check if it succeeded by doing the 1st step

Verify that your submission can be processed.

4.13.3 Create new logos for each competitions (version < 1.4.1)

 **This intervention is needed when upgrading from a version equal or lower than v1.4.1**

In order to create a "logo icon" for each existing competition

1. Shell into django

```
docker compose exec django bash
python manage.py shell_plus --plain
```

2. Get competitions that don't have logo icons

```
import io, os
from PIL import Image
from django.core.files.base import ContentFile
comps_no_icon_logo = Competition.objects.filter(logo_icon__isnull=True)
all = Competition.objects.all()
len(Competition.objects.all())
len(comps_no_icon_logo)
```

3. Then run this script

```
for comp in comps_no_icon_logo:
    try:
        comp.make_logo_icon()
        comp.save()
    except Exception as e:
        print(f"An error occurred: {e}")
        print(comp)
```

4.13.4 Worker docker image manual update (version < 1.3.1)

 **This intervention is needed when upgrading from a version equal or lower than v1.3.1**

To update your worker docker image, you can launch the following code in the terminal on the machine where your worker is located.

```
docker stop compute_worker
docker rm compute_worker
docker pull codalab/competitions-v2-compute-worker:latest
docker run \
  -v /codabench:/codabench \
  -v /var/run/docker.sock:/var/run/docker.sock \
  -d \
  --env-file .env \
  --name compute_worker \
  --restart unless-stopped \
  --log-opt max-size=50m \
  --log-opt max-file=3 \
  codalab/competitions-v2-compute-worker:latest
```

4.13.5 Add line in .env file for default worker queue duration (version < 1.7.0)

 **This intervention is needed when upgrading from a version equal or lower than v1.7.0**

You will need to add the following line into your `.env` file

```
.env
```

```
MAX_EXECUTION_TIME_LIMIT=600 # time limit for the default queue (in seconds)
```

This will change the maximum time a job can run on the default queue of your instance, as noted [here](#)

4.13.6 Uncomment a line in your .env file (version < 1.8.0)

 **This intervention is needed when upgrading from a version equal or lower than v1.8.0**

After the Caddy upgrade, you will need to uncomment a line in your `.env` file:

```
.env
```

```
TLS_EMAIL = "your@email.com"
```

More information [here](#)

4.13.7 Rebuilding all docker images (version < 1.9.2)

 This intervention is needed when upgrading from a version equal or lower than v1.9.2

Since we are now using Poetry, we need to rebuild all our docker images to include it.

You can achieve this by running the following commands :

 **Warning**

If your machine has other images or containers that you want to keep, do not run `docker system prune -af`. Instead, manually delete all the images related to codabench

```
docker compose build && docker compose up -d  
docker system prune -a
```

More information (and alternative commands) [here](#)

4.13.8 Move the latest storage_inconsistency files from the logs folder to var/logs (version < 1.12.0)

 This intervention is needed when upgrading from a version equal or lower than [v1.11.0](#)

You will need to move the last storage_inconsistency files from /logs folder to /var/logs/ folder.

```
cd codabench
cp -r logs/* var/logs
```

You will also need to rebuild the celery image because of a version change that's needed.

```
docker compose down
docker images # Take the ID of the celery image
docker rmi *celery_image_id*
docker compose up -d
```

More information [here](#)

4.13.9 Submissions and Participants count (version < 1.14.0)

 After upgrading from Codabench <1.14, you will need to follow these steps to compute the submissions and participants counts on the competition pages. See [this](#) for more information

1. Re-build containers

```
docker compose build && docker compose up -d
```

2. Migration

```
docker compose exec django ./manage.py migrate
```

3. Update counts for all competitions

Bash into django console

```
docker compose exec django ./manage.py shell_plus
```

Import and call the function

```
from competitions.submission_participant_counts import compute_submissions_participants_counts
compute_submissions_participants_counts()
```

4. Feature some competitions in home page

There are two ways to do it: 1. Use Django admin -> click the competition -> scroll down to is featured filed -> Check/Uncheck it 2. Use competition ID in the django bash to feature / unfeature a competition

```
docker compose exec django ./manage.py shell_plus
```

```
comp = Competition.objects.get(id=<ID>) # replace <ID> with competition id
comp.is_featured = True # set to False if you want to unfeature a competition
comp.save()
```

4.13.10 Homepage Counters (version < 1.15.0)

 After upgrading from Codabench <1.15, you will need to follow these steps to compute the homepage counters. See [this](#) for more information

1. Re-build containers

```
docker compose build && docker compose up -d
```

1. Update the homepage counters (to avoid waiting 1 day)

```
docker compose exec django ./manage.py shell_plus
```

```
from analytics.tasks import update_home_page_counters
eager_results = update_home_page_counters.apply_async()
```

4.13.11 User Removal (version < 1.17.0)

 After upgrading from Codabench <1.17, you will need to perform a Django migration ([#1715](#), [#1741](#))

```
docker compose exec django ./manage.py migrate
```

4.13.12 Database size fix (version < 1.18.0)

⚠ Warning

You need to stop the database from being changed while running these commands. They might take time to complete depending on the size of your database.

Start maintenance mode:

```
touch maintenance/maintenance.on
```

1. DJANGO MIGRATION (1774, 1752)

```
docker compose exec django ./manage.py migrate
```

2. RESET USER QUOTA FROM BYTES TO GB (1749)

```
docker compose exec django ./manage.py shell_plus
```

```
from profiles.quota import reset_all_users_quota_to_gb
reset_all_users_quota_to_gb()
```

```
# Convert all 16 GB quota into 15 GB
from profiles.models import User
users = User.objects.all()
for user in users:
    # Reset quota to 15 if quota is between 15 and 20
    # Do not reset quota for special users like adrien
    if user.quota > 15 and user.quota < 20:
        user.quota = 15
        user.save()
```

3. IMPORTANT FOR FILE SIZES CLEANUP (1752)

We have some critical changes here so before deployment we should run the following 3 blocks of code to get the last ids of `Data`, `Submission` and `SubmissionDetail`

Then, in the `shell_plus`:

```
# Get the maximum ID for Data
from datasets.models import Data
latest_id_data = Data.objects.latest('id').id
print("Data Last ID: ", latest_id_data)

# Get the maximum ID for Submission
from competitions.models import Submission
latest_id_submission = Submission.objects.latest('id').id
print("Submission Last ID: ", latest_id_submission)

# Get the maximum ID for Submission Detail
from competitions.models import SubmissionDetails
latest_id_submission_detail = SubmissionDetails.objects.latest('id').id
print("SubmissionDetail Last ID: ", latest_id_submission_detail)
```

After we have the latest ids, we should deploy and run the 3 blocks of code below to fix the sizes i.e. to convert all kib to bytes to make everything consistent. For new files uploaded after the deployment, the sizes will be saved in bytes automatically that is why we need to run the following code for older files only.

```
# Run the conversion only for records with id <= latest_id
from datasets.models import Data
for data in Data.objects.filter(id__lte=latest_id_data):
    if data.file_size:
        data.file_size = data.file_size * 1024 # Convert from KiB to bytes
        data.save()

# Run the conversion only for records with id <= latest_id
from competitions.models import Submission
for sub in Submission.objects.filter(id__lte=latest_id_submission):
    updated = False # Track if any field is updated
```

```

if sub.prediction_result_file_size:
    sub.prediction_result_file_size = sub.prediction_result_file_size * 1024 # Convert from KiB to bytes
    updated = True

if sub.scoring_result_file_size:
    sub.scoring_result_file_size = sub.scoring_result_file_size * 1024 # Convert from KiB to bytes
    updated = True

if sub.detailed_result_file_size:
    sub.detailed_result_file_size = sub.detailed_result_file_size * 1024 # Convert from KiB to bytes
    updated = True

if updated:
    sub.save()

# Run the conversion only for records with id <= latest_id
from competitions.models import SubmissionDetails
for sub_det in SubmissionDetails.objects.filter(id__lte=latest_id_submission_detail):
    if sub_det.file_size:
        sub_det.file_size = sub_det.file_size * 1024 # Convert from KiB to bytes
        sub_det.save()

```

Then, do not forget to stop maintenance mode:

```
rm maintenance/maintenance.on
```

5. Newsletters Archive

5.1 2024

5.1.1 CodaLab in 2024

A Year of Breakthroughs and New Horizons with Codabench

Welcome to the first edition of CodaLab's newsletter! This year has been full of novelty, success, and scientific progress. The platform is breaking records of participation and number of organized competitions, and [Codabench](#), the new version of [CodaLab](#), had a very promising launch. Let's dive into more details.




5.1.2 Unprecedented engagement

In October, Codabench has registered its **10,000th user!** From about 100 daily submissions in January, it is now **more than 500 daily submissions** that are handled on the servers. In 2024, more than 20,000 new users have registered on CodaLab, whereas more than 12,000 on Codabench.

249 public competitions have been created on CodaLab, whereas **193 on Codabench: +15%** of total competitions of both platforms compared to 2023. CodaLab continues to handle a large number of submissions, as many past competitions remain active even after they have officially ended: **240,000 submissions on CodaLab** whereas **83,000 on Codabench**.

Contributors community is very active with **143 pull requests** this year. Since the platform is still relatively new, the primary focus has been on bug fixes, security and performance enhancements, and administrative features, accounting for approximately two-thirds of the pull requests. Nevertheless, we are keen on improving the experience for both participants and organizers. We have set a versioning and a release-notes follow-up to give more visibility to the platform evolution and maturity.

GitHub Pull Requests Activity 2024

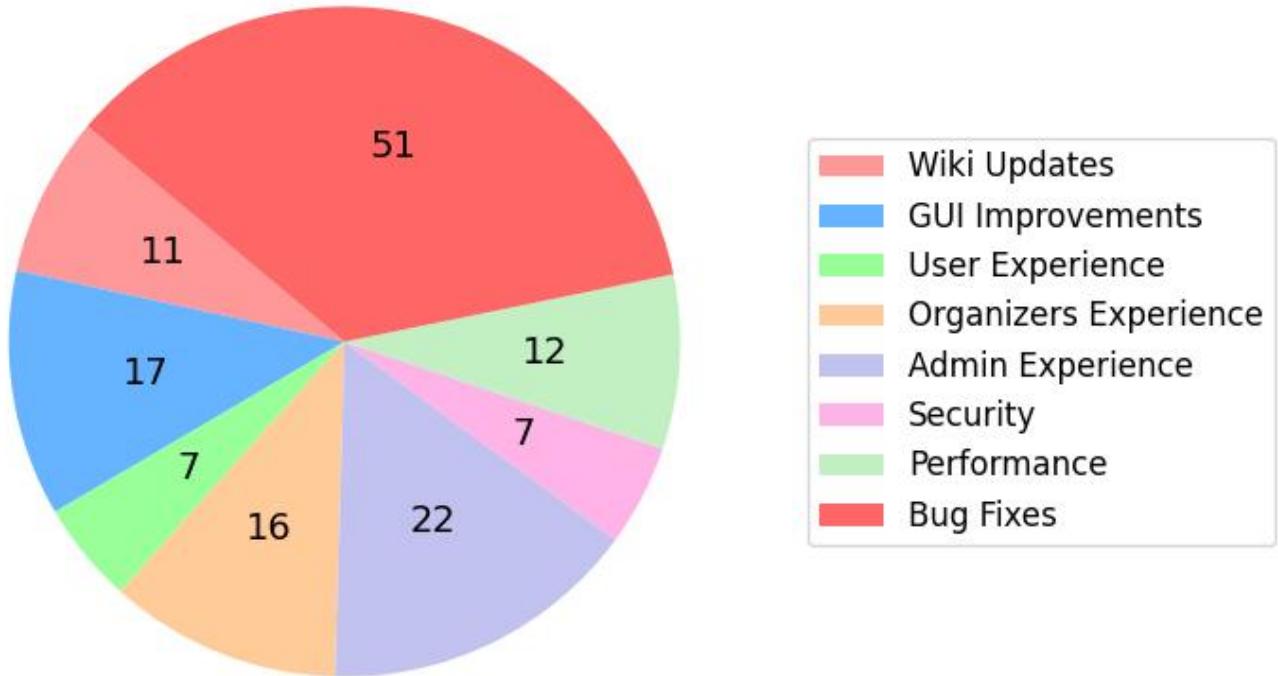

5.1.3 Introducing Codabench

Codabench, the modernized version of [CodaLab](#), was released in summer 2023, and [presented at JCAD days](#) in November 2024! Codabench platform software is now concentrating all development effort of the community. In addition to CodaLab features, it offers improved performance, live logs, more transparency, data-centric benchmarks and more!

We warmly encourage you to use [codabench.org](#) for all your new competitions and benchmarks. Note that CodaLab bundles are compatible with Codabench, easing the transition, as explained in the following Wiki page: [How-to-transition-from-CodaLab-to-Codabench](#)

CodaLab and Codabench are hosted on servers located at [Paris-Saclay university](#), maintained by [LISN lab](#).

5.1.4 Spotlight on competitions

The most popular competition this year, featuring **520 participants**, was the SemEval task [Bridging the Gap in Text-Based Emotion Detection](#). The task of this competition focused on identifying the emotion that most people would associate with a speaker based on a given sentence or short text snippet.

The competition with the highest reward, a **prize pool of \$100,000**, was the [Global Artificial Intelligence Championships](#), track Maths 2024, a pioneering contest that aimed to advance the development of artificial intelligence tools for solving advanced mathematical problems across multiple levels of difficulty ([full report here](#)).

Codabench featured interesting **NeurIPS 2024 challenges**:

- The [LLM Privacy Challenge](#), where participants were divided into two teams: [Red Team](#) and [Blue Team](#), each one aiming at developing attack and defense approaches for data privacy in LLMs.
- [Fair Universe - Higgs Uncertainty Challenge](#), exploring uncertainty-aware AI techniques for High Energy Physics (HEP).
- The [Concordia Challenge](#), focusing on improving the cooperative intelligence of AI systems: promise-keeping, negotiation, reciprocity, reputation, partner choice, compromise, and sanctioning.
- The [Erasing the Invisible Challenge](#), where the task is to remove invisible watermarks from images, while preserving the overall image quality.
- Codabench also hosted the [NeurIPS 2024 Checklist Assistant](#), a self-service tool for the NeurIPS 2024 checklist. This verification assistant helps authors confirm their papers' compliance and submit improved versions based on the Assistant's feedback. For more details check out the [blog post](#) and the [experiment results](#).

Last but not least, Codabench featured several competitions in the fields of medicine and biology, such as the [Dental CBCT Scans](#), [Panoramic X-ray Images](#), [Butterfly Hybrid Detection](#), and [Monitoring Age-related Macular Degeneration Progression In Optical Coherence Tomography](#).

We'd like to thank the whole community for these exceptional scientific contributions. You can explore more challenges in the [public listing](#).

5.1.5 What about the future?

We always develop new features to serve the state-of-the art of Machine Learning science. We plan to invest effort in **handling medical data**, improving **federated learning** use-cases, and allowing **human-in-the loop** feedback for better AI experience.

The **platform interface will also be improved** for better visibility and facilitated re-use of datasets, tasks or solutions generated through it.

Keep in touch and give us feedback on your experience on Codabench !

5.1.6 Community

Reminder on our communication tools:

- Join our [google forum](#) to emphasize your competitions and events
- Contact us for any question: info@codalab.org
- Write an issue on [github](#) about interesting suggestions

Please cite one of these papers when working with our platforms:

```
@article{codabench,
  title = {Codabench: Flexible, easy-to-use, and reproducible meta-benchmark platform},
  author = {Zhen Xu and Sergio Escalera and Adrien Pavao and Magali Richard and Wei-Wei Tu and Quanming Yao and Huan Zhao and Isabelle Guyon},
  journal = {Patterns},
  volume = {3},
  number = {7},
  pages = {100543},
  year = {2022},
  issn = {2666-3899},
  doi = {https://doi.org/10.1016/j.patter.2022.100543},
  url = {https://www.sciencedirect.com/science/article/pii/S2666389922001465}
}
```

```
@article{codalab_competitions_JMLR,
  author = {Adrien Pavao and Isabelle Guyon and Anne-Catherine Letournel and Dinh-Tuan Tran and Xavier Baro and Hugo Jair Escalante and Sergio Escalera and Tyler Thomas and Zhen Xu},
  title = {Codalab Competitions: An Open Source Platform to Organize Scientific Challenges},
  journal = {Journal of Machine Learning Research},
  year = {2023},
  volume = {24},
  number = {198},
  pages = {1--6},
  url = {http://jmlr.org/papers/v24/21-1436.html}
}
```

5.1.7 Last words

Thank you for reading the first edition of our newsletter. We look forward to sharing more exciting updates, competitions, and breakthroughs with you soon. Until then, keep exploring, keep competing, and stay inspired!



6. How you can contribute

6.1 Index

- Use [Codabench](#) by either participating in a competition or hosting a new competition.
- Find a bug? Got a feature request? Submit a [GitHub issue](#).
- [P1 issues](#) are the most important ones.
- Submit pull requests on GitHub to implement new features or fix bugs (see [the contributing section](#)).
- Improve this documentation.
- Let others know about Codabench!

6.2 Contributing

6.2.1 Being a Codabench user

- Create a user account on [Codabench](#)
- Register on [Codabench](#) to this existing competition [IRIS-tuto](#) and make a submission (you can find the necessary files [here](#)): `sample_result_submission` and `sample_code_submission`. See [this page](#) for more information.
- Create your own private competition (you can find the necessary files [here](#)). See [this page](#) for more information.

6.2.2 Setting up a local instance of Codabench

- Follow the tutorial in [codabench wiki](#). According to your hosting OS, you might have to tune your environment file a bit. Try without enabling the SSL protocol (doing so, you don't need a domain name for the server). Try using the embedded Minio storage solution instead of a private cloud storage.
- If needed, you can also look into [How to deploy Codabench on your server](#)

Using your local instance

- Create your own competition and play with it. You can look at the output logs of each different docker container.
- Setting you as an [admin](#) of your platform and visit the Django Admin menu.

6.2.3 Setting up an autonomous Compute Worker on a machine

- Configure and launch a [compute worker](#) docker container.
- Create a private [Queue](#) on your new own competition on the production server codabench.org
- Assign your own compute-worker to this private queue instead of the default queue.

7. FAQ

7.1 General questions

7.1.1 What is Codabench for?

Codabench benchmarks are aimed at researchers, scientists and other professionals who want to track algorithm performance via benchmarks or have participants participate in a competition to find the best solution to a problem. We run a free public instance at <https://www.codabench.org/> and the raw code is on [Github](#).

7.1.2 Can CodaLab competitions be privately hosted?

Yes, you can host your own CodaLab instance on a private or hosted server (e.g. Azure, GCP or AWS). For more information, see [how to deploy Codabench on your server](#) and [local installation](#) guide. However, most benchmark organizers do NOT need to run their own instance. If you run a computationally demanding competition, you can hook up your own [compute workers](#) in the backend very easily.

7.1.3 How to change my username?

You cannot change your username BUT you can change your display name which will then be displayed instead of your username. To change your display name, follow these instructions:

1. Login to Codabench
2. Click your username in the top right corner
3. Click 'Edit Profile' in the list
4. Set a display name you want to use
5. Click 'Submit' button to save changes

7.1.4 How to make a task public or use public tasks from other users?

Follow the detailed instruction [here](#) to know how you can make your task public and use other public tasks in your competitions.

7.1.5 How to delete my account?

Click on your account name on the top right of the website, then on [account](#)

7.2 Technical questions

7.2.1 Server Setup Issues

Many technical FAQ are already located in the [deploy your own server instructions](#).

Questions already answered there:

- Getting [Invalid HTTP method in django logs](#).
- I am missing some static resources (css/js) on front end.
- CORS error when uploading bundle.
- Logos don't upload from minio.
- Compute worker execution with insufficient privileges
- Securing Codabench and Minio

7.2.2 A library is missing in the docker environment. What do to?

How does Codabench use dockers?

When you submit code to the Codabench platform, your code is executed inside a docker container. This environment can be exactly reproduced on your local machine by downloading the corresponding docker image.

For participants

- If you are a **competition participant**, contact the competition organizers to ask them if they can add the missing library or program. They can either accept or refuse the request.

For organizers

- If you are a **competition organizer**, you can select a different competition docker image. If the default docker image (`codalab/codalab-legacy:py37`) does not suits your needs, you can either:
 - Select another image from DockerHub
 - Create a new image from scratch
 - Edit the default image and push it to your own DockerHub account

[More information here.](#)

7.2.3 Emails are not showing up in my inbox for registration

When deploying a local instance, the email server is not configured by default, so you won't receive the confirmation email during signup. In `.env` towards the bottom you will find:

```
.env

# Uncomment to enable email settings
#EMAIL_BACKEND=django.core.mail.backends.smtp.EmailBackend
#EMAIL_HOST=smtp.sendgrid.net
#EMAIL_HOST_USER=user
#EMAIL_HOST_PASSWORD=pass
#EMAIL_PORT=587
#EMAIL_USE_TLS=True
```

Uncomment and fill in SMPT server credentials. A good suggestion if you've never done this is to use [sendgrid](#).

7.2.4 Robots and automated submissions?

What about robot policy, reckless, or malicious behavior? Codabench does not forbid the use of [robots](#) (bots) to access the website, provided that it is not done with malicious intentions to disturb the normal use and jam the system. A user who abuses their rights by knowingly, maliciously, or recklessly jamming the system, causing the system to crash, causing loss of data, or gaining access to unauthorized data, will be banned from accessing all Codabench services.

8. Contact Us

- The preferred way is via posting a [GitHub issue](#).
- If you wish to get in touch with the community, you can use the [Google Groups](#).
- In case of emergency

[Send us an email](#) 